







EDIDRITE

PEXRITE®

PEXRITE® provides a torchless installation, ideal for single and multi-family housing projects. PEXRITE is ideal for PEX, CPVC or Copper stub-outs.

HOLDRITE® #117 Series

Meets or exceeds Plumbing Codes and CISPI installation guidelines for restraining hubless cast iron soil pipe joints against separation during high thrust conditions.


Quick Stand™ Platform

Third party testing confirms the strength and reliability of the galvanized steel construction of HOLDRITE's line of water heater and equipment supports.

HOLDRITE® HydroFlame™

These UL Classified systems provide superior waterproofing and firestopping capabilities to help safeguard property from water damage, while protecting lives against the dangers of fire and smoke.

SOLUTIONS ENGINEERED CONVERTING MAKESHIFT METHODS INTO

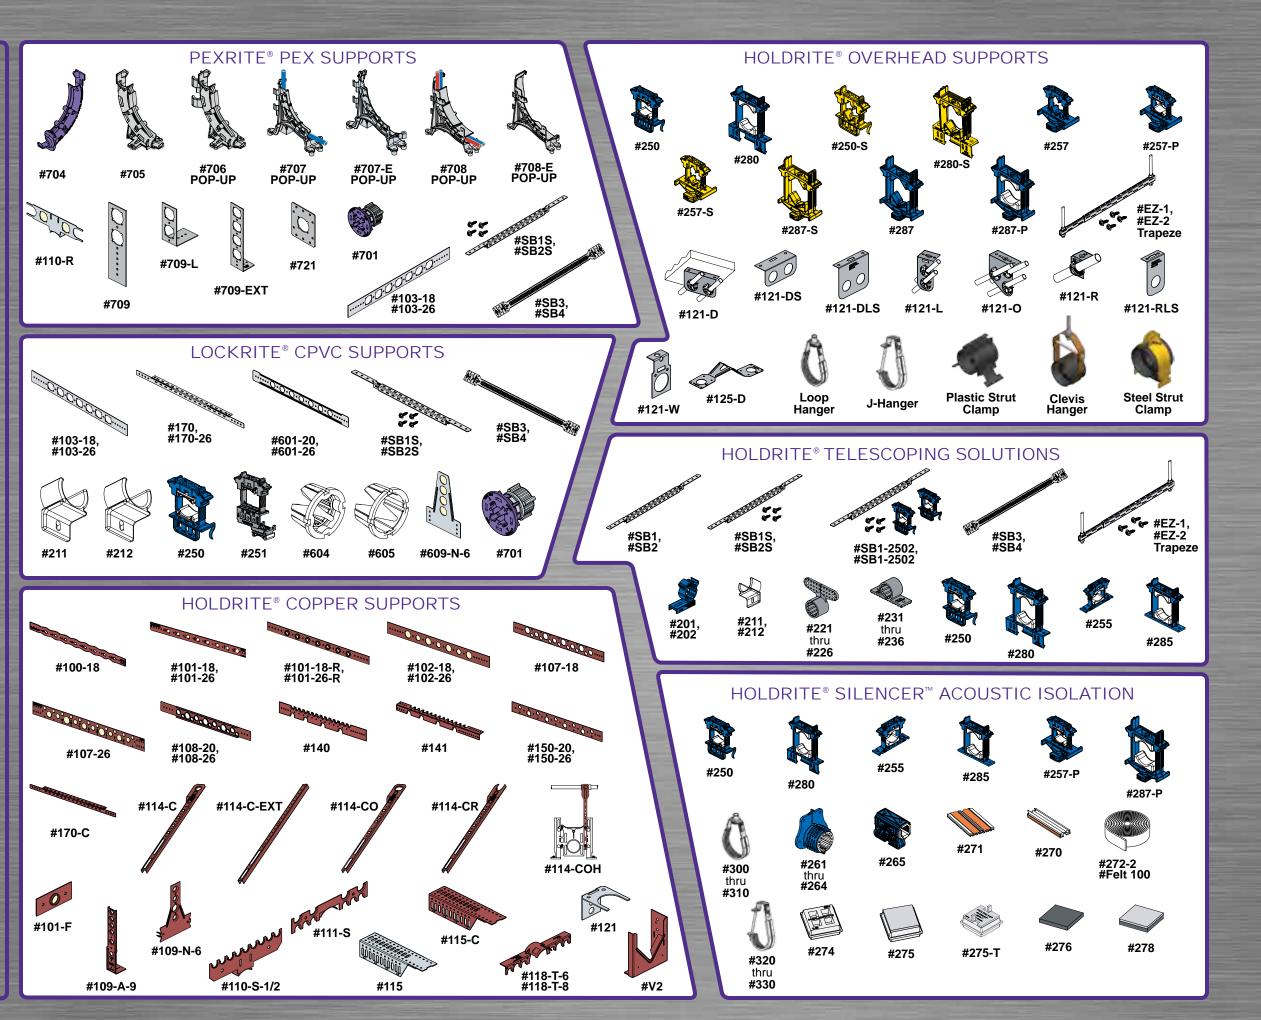





6

3

3

0


00

0

C

(1)

Distribution and Shipping Policy

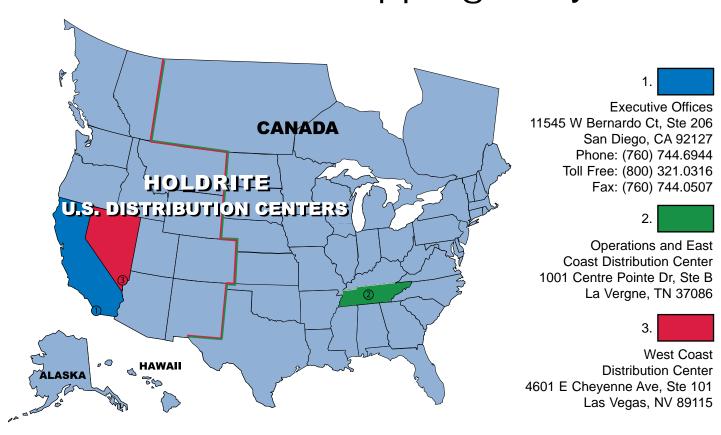

HOW TO ORDER:

Visit us on the web at www.holdrite.com to find a sales representative in your area, or give us a call at 1-800-321-0316. Orders should be faxed to (760) 744-0507.

ADDITIONS AND CHANGES:

Orders normally ship within 24 hours. We make every effort to comply with your instructions. We will accept changes to orders; however, additional freight charges may be incurred.

PRODUCT RETURNS:

All returns must comply with the established guidelines below:

- A Return Goods Authorization number is required. Any product received without our RGA number will be refused. THE RGA IS VALID FOR 30 DAYS FROM ISSUE DATE. Returns not received within 30
- Returns must be shipped freight prepaid back to distribution center.
- All returned products must be (1) in full box quantities, (2) of current design and material, and (3) in
- A credit memo will be issued against the Distributor's Net Price at the time of return, and will only be issued once quantities have been verified. Credit memos are only issued for full box quantities. Broken boxes, unsaleable material, specials or discontinued products will not be considered for
- A 25% RESTOCKING FEE WILL BE CHARGED FOR ALL RETURNS.
- All product returns are subject to the above terms and conditions.

ERRORS & SHORTAGES:

Shipping errors (e.g. wrong sizes or shortages) must be reported within 15 days.

DAMAGE TO FREIGHT:

Any shipment that appears to be damaged in shipping must be noted when signing for receipt of delivery.

HOLDRITE® will not be liable for damages or injury to property or persons due to improper installation of products, attempts to utilize the material under conditions which exceed the designed capabilities, or using the products other than as intended. Purchaser agrees to indemnify and hold us harmless for any and all claims, liabilities, damages, costs, and expenses asserted against us or incurred by us because of injuries to persons or damage to property resulting from the improper installation or misuse of the products.

Table of Contents

HOLDRITE® Company Overview	4
Converting Makeshift Methods into Engineered Solutions SM	5
PEXRITE® Pex and Other Flexible Tubing Supports	6-11
LOCKRITE™ CPVC Tubing Supports	12-15
HOLDRITE® Residential Copper Tubing Supports	16-19
HOLDRITE® Commercial Copper Tubing Supports	20-26
HOLDRITE® #117 Series No-Hub Fitting Restraints	27-30
HOLDRITE Stout Bracket® Telescoping Support Solutions	31-33
HOLDRITE Silencer™ Noise and Vibration Isolation Solutions	34-39
HOLDRITE® Inserts and Clamps	40-43
HOLDRITE® Overhead Supports	44-50
Quick Brands: Water Heater Accessories and Equipment Supports	51-54
HOLDRITE [®] HydroFlame [™] Water and Firestop Solutions	55-67
VIP Services	68
Quick Search by Application	69-75
Material Take Off Sheet and Product Index	76-90

www.holdrite.com

^{© 2012} HOLDRITE. All rights reserved. Products shown may be protected by U.S. or Foreign Patent or Patents Pending

HOLDRITE® Company Overview

The last three decades have seen HOLDRITE® evolve from a single-product family business to an acknowledged leader in the plumbing industry with international presence. Hundreds of millions of HOLDRITE® products have been installed into a wide variety of construction projects, from single-family and multi-family housing to hotels, motels, healthcare institutions and many other market sectors. By understanding both the large project perspective and specific application requirements, HOLDRITE® has developed solutions that assist in establishing a "shop standard" for the collaborative efforts of developers, architects, engineers and contractors.



HOLDRITE® has established a reputation as a leading manufacturer known for innovative products and services in such categories as pipe support systems, acoustical noise and vibration plumbing solutions, sleeving and firestopping systems, equipment supports and water heater accessories. The construction industry has seen fluctuating material costs and challenging market conditions, resulting in contractors looking to reduce their overall installation costs to stay competitive and grow their

market share. This has significantly influenced changes in material type preferences and installation methodologies. HOLDRITE® continues to develop innovative products that support Copper, PEX, CPVC tubing, Steel Pipe, CSST, Cast Iron and other material types.

HOLDRITE® also offers value-added No-Cost Services to the plumbing contractor, wholesaler, mechanical engineer, and architect to assist with multiple stages in the project. These "VIP Services" include specification and submittal assistance, 3-D product drawings, custom installation detail pages, and material "take-off" assistance to help plan for product inventory control and efficiencies. As always, HOLDRITE® will stay at the forefront of the construction industry by offering innovative and cost-effective products that are optimized to be the best solution for the total application.





Converting Makeshift Methods into Engineered Solutions


Makeshift Methods

Engineered Solutions


LAVATORY / SINK




WATER HEATER SUPPORT

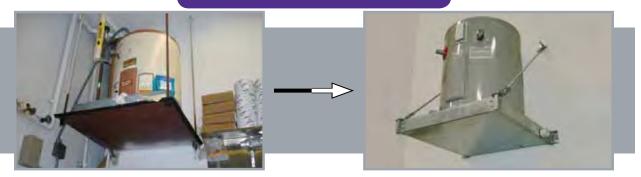

VERTICAL

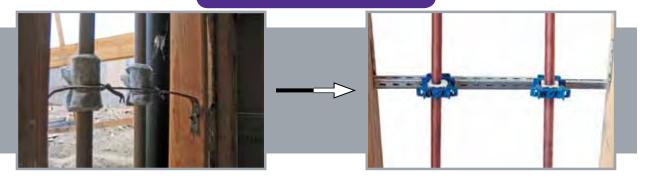

SHOWER HEAD

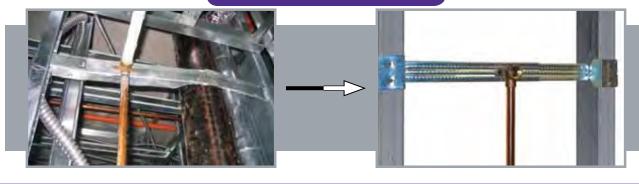

PEXRITE®





The Torchless InstallationTM


Minimizes Concealed Joints

Reduces In-Wall Fittings

Flame-free Environment at Stub-Out Location

Compatible with All PEX Manufacturers


Pick your Stub-Out Method

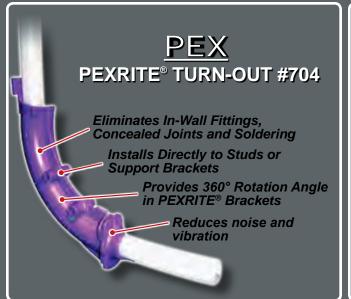




#103-18



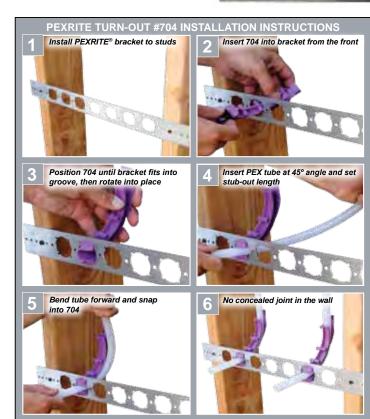

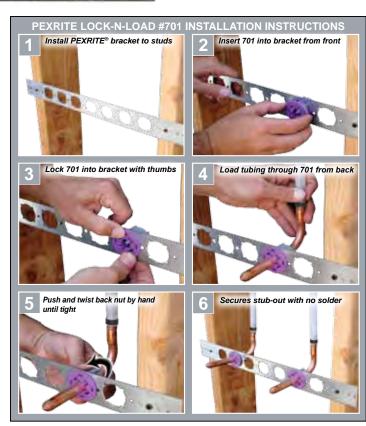

For use with PEXRITE® Brackets Only

View a 3-minute Installation Video at

www.holdrite.com/media/video

PEX Solutions


PEX Solutions



- HOLDRITE® - #103-18, #103-26

- Versatile bracket ideal for sink, lavatory & toilet stub-out solutions
- Galvanized steel bracket with 1-3/8" keyed holes on 2" centers
- Integrates with PEXRITE #701 & #704 with patented connection and other HOLDRITE inserts

2	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	103-18	20"	1/2", 3/4 ", 1" CTS	50
	103-26	26"	1/2", 3/4 ", 1" CTS	50



HOLDRITE® LOCK-N-LOAD™ - #701

- Stub-out clamp ideal for 1/2" CTS PEX-to-Copper transition at lavatory/sink or toilet
- Integrates with #103, #110-R, and #709 series brackets
- Compatible with PEX, Copper, and CPVC
- Tightens by hand No tools required
- Eliminates soldering
- Secure fit resists forward and backward movement


Model#	Size	For Pipe Size(s)	Box Qty
701	2" x 1-3/4"	1/2" CTS	50



PEXRITE® - #704

- PEX turnout integrates with #103, #110-R, and #709 series brackets
- Can be installed directly to stud
- Eliminates in-wall fittings and concealed joints
- Provides 360-degree turning radius when used with PEXRITE brackets
- Torch-free environment at stub-out location
- Eliminates the need for costly copper bullets
- Compatible with all PEX tubing manufacturers


Model#	Size	For Pipe Size(s)	Box Qty
704	3-1/4" X 5-1/2"	3/8" - 1/2" CTS	100



HOLDRITE® - #103-18-701, #103-26-701

- Ideal for lavatory/sink and toilet stub-outs
- Sold in bulk packaging
- #103-18-701 includes 20" brackets and 1/2" CTS #701 stub-out clamps
- #103-26-701 includes 26" brackets and 1/2" CTS #701 stub-out clamps

7	Model#	Size	For Pipe Size(s)	Box Qty
	103-18-701	20" Bracket	1/2" CTS	50 Brackets/100 Clamps
	103-26-701	26" Bracket	1/2" CTS	50 Brackets/100 Clamps



#709-EXT

HOLDRITE® – #709, #709-L, #709-EXT

- Ideal for toilets and hose bib stub outs
- Galvanized steel brackets with 1-3/8" keyed holes
- Allows for 360-degree orientation when used with #701/#704
- #709 provides 4-1/4" and 6-1/4" center line heights
- #709-L provides 1-3/8" and 3-3/8" center line off stud/plate (3" & 5" off floor)
- #709-EXT provides 2", 4", 6", and 8" center line heights off plate or floor


3	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	709	7-1/2" X 2"	3/8" - 1" CTS	50
	709-L	4-1/4" X 3-1/4" X 2"	3/8" - 1" CTS	50
	709-EXT	9" X 2-1/8" X 2"	3/8" - 1" CTS	50



□ HOLDRITE® – #721

- Attaches to framing or directly to HOLDRITE Stout Bracket[®]
- · Ideal for lavatory or toilet stub-outs
- Galvanized steel bracket with 1-3/8" keyed hole
- Allows for 360-degree orientation when used with #701/#704 inserts


Model#	Bracket Size	For Pipe Size(s)	Box Qty
721	2-3/4" X 3-3/8"	3/8" - 1" CTS	50



HOLDRITE STOUT BRACKET® – #SB1S. #SB2S

- Multi-purpose galvanized bracket supports various application solutions
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports PEX, Copper, CPVC, and other types of piping
- Numerous components integrate into multiple sides of the Stout Bracket
- Provides superior strength and versatility
- · Includes four screws

7	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	SB1S	10" to 18"	Various	50
	SB2S	13" to 25"	Various	50



-HOLDRITE STOUT BRACKET $^{\circ}$ - #SB3, #SB4

- Ideal for shower head, tub spout, vertical mid-span, and much more
- Supports both 2-eared and 3-eared 90s
- Telescoping design supports CPVC, PEX, Copper and various other pipe types
- Integrates with several HOLDRITE clamps and other industry standard components





-HOLDRITE® – #101-18-R, #101-26-R

- · Ideal for lavatory, toilet, and tub spout support
- Extruded holes provide additional soldering surface
- Ideal for PEX-to-Copper bullets
- Copper-bonded steel bracket
- #101-18-R provides 5/8" holes on 2" centers
- #101-26-R provides 5/8" holes on 2" centers and two 7/8" holes on 8" centers

9	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	101-18-R	20"	1/2" CTS	25
	101-26-R	26"	1/2" CTS	25



#121-RLS

HOLDRITE® - #121-R. #121-W. #121-RLS

- Ideal for single pipe run support, including Copper, CPVC, and PEX
- #121-R provides 1-1/4" center line distance from structure
- #121-W provides a 2" center line distance from structure
- #121-RLS provides a 3" center line distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

Model#	Size	For Pipe Size(s)	Box Qty
121-R	2" X 1-3/4" X 1-1/2"	1/2", 3/4", 1" CTS	25
121-W	3" X 1-3/4" X 3/4"	1/2", 3/4", 1" CTS	25
121-RLS	4-1/2" x 2-5/8" x 1"	1/2", 3/4", 1" CTS	50








-HOLDRITE® - #110-R

- Ideal for lavatory/island sink
- Galvanized steel bracket with "key design" allows integration with various HOLDRITE inserts, #701, and #704
- Allows for easy Pre-fabrication at the shop or in the field
- Install directly to the waste/vent pipe prior to stude being erected
- Supports 4" and 8" centers
- Self-locking stainless steel band & isolating felt included

Model#	Bracket Size	For Pipe Size(s)	Box Qty
110-R	2-1/8" X 1-7/8"	1/2", 3/4 ", 1" CTS	50



HOLDRITE® – #121-D, #121-DLS, #121-DS

- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- #121-D provides 2" center line distance from structure
- #121-DLS provides 3" center line distance from structure
- #121-DS provides 1-1/4" center line distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

	Model#	Size	For Pipe Size(s)	Box Qty
	121-D	5" X 3" X 1"	1/2", 3/4", 1" CTS	25
	121-DLS	5" x 4-1/2" x 1"	1/2", 3/4", 1" CTS	25
	121-DS	5" x 2-1/4" x 1-3/4"	1/2", 3/4", 1" CTS	25



– HOLDRITE® – #121-L

- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- Provides 2" and 4" center line distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

Model#	Size	For Pipe Size(s)	Box Qty
121-L	5" X 2-1/2" X 2"	1/2", 3/4", 1" CTS	25



-PEXRITE® - #705

- Turn-out support for 3/8" and 1/2" CTS PEX tubing
- Ideal for lavatory/sink & toilet stub-out and overhead 90° turn
- Mount to block of wood or other flat surface
- Unique design allows for side-entry of tubing

Model#	Size	For Pipe Size(s)	Box Qty
705	5-1/3" x 4-1/8" x 2-1/2"	3/8" & 1/2" CTS	50



PEXRITE POP-UP™ – #706

- Single run PEXRITE POP-UP for RADIANT HEATING or other in-slab PEX or soft Copper tubing support (1-1/2" or thicker slabs)
- Unique design allows for side-entry of tubing
- Mounts to form decking with nails or slab-on-grade with rebar
- Manifold capability with interlocking feet

9	Model#	Size	For Pipe Size(s)	Box Qty
	706	5-1/3" x 5" x 2-1/2"	3/8" & 1/2" CTS	50



PEXRITE POP-UP™ – #707, #707-E

- Single run PEXRITE POP-UP for in-slab flexible tubing support
- Manifold capability with interlocking feet
- Compatible with PEX, soft Copper, flexible conduit
- #707 design allows for side-entry of tubing
- #707-E design allows for easy zip tie installation of flexible or rigid tubing
- Mounts to form decking with nails or slab-on-grade with rebar

7	Model#	Size	For Pipe Size(s)	Box Qty
	707	8-1/2" X 8-5/8" X 1-1/4"	3/8" thru 7/8" O.D.	25
	707-E	8-1/2" X 8-5/8" X 1-1/4"	3/8" thru 1-1/2" O.D.	25

PEXRITE POP-UP™ – #708

- Double run PEXRITE POP-UP for in-slab flexible tubing support
- Manifold capability with interlocking feet
- Compatible with PEX, soft Copper, flexible conduit
- Unique design allows for side-entry of tubing
- Mounts to form decking with nails or slab-on-grade with rebar

7	Model#	Size	For Pipe Size(s)	Box Qty
	708	10-1/2" X 11-1/8" X 2-1/2"	3/8" thru 1-1/8" O.D.	15



PEXRITE POP-UP™ – #708-E


- Double run PEXRITE POP-UP for in-slab PEX tubing, flexible conduit, & rigid conduit 90s.
- Unique design allows for easy zip tie or tie wire pipe attachment
- Mounts to form decking with nails or slab-on-grade with rebar
- Manifold capability with interlocking feet

9	Model#	Size	For Pipe Size(s)	Box Qty
	708-E	10-1/2" x 11-1/6" x 3-1/4"	3/8" thru 2-1/2" IPS	15



HOLDRITE® INSERTS - #104 - #106


- Ideal for pipe support with HOLDRITE #121 & #103/#700 series brackets
- Compatible with PEX, Copper, and CPVC tubing






HOLDRITE® INSERTS – #404-R - #406-R

- Ideal for metal studs with PEX, Copper, and CPVC tubing
- Integrates with most HOLDRITE galvanized brackets
- Flame-rated per UL 94 V-2 standards
- Fits in 1-3/8" or 1-11/32" holes






- Ideal for metal thru-stud applications and integrates with HOLDRITE #121 and #125 series brackets
- \bullet Positioning and dissimilar metal isolation for Copper, CPVC, and PEX tubing
- Meets UL 94 HB requirements (UL 94 V-2 and Plenum-rated available)

7	Model#	Hole Size	Pipe Size	Bag Qty	Master Carton Qty
	424	1-11/32" & 1-3/8"	1/2" CTS	50	250
	425	1-11/32" & 1-3/8"	3/4" CTS	50	250
	426	1-11/32" & 1-3/8"	1" CTS	50	250

$\mathsf{LOCKRITE}^{\scriptscriptstyle\mathsf{TM}}$

CPVC SUPPORT AND ALIGNMENT SOLUTIONS

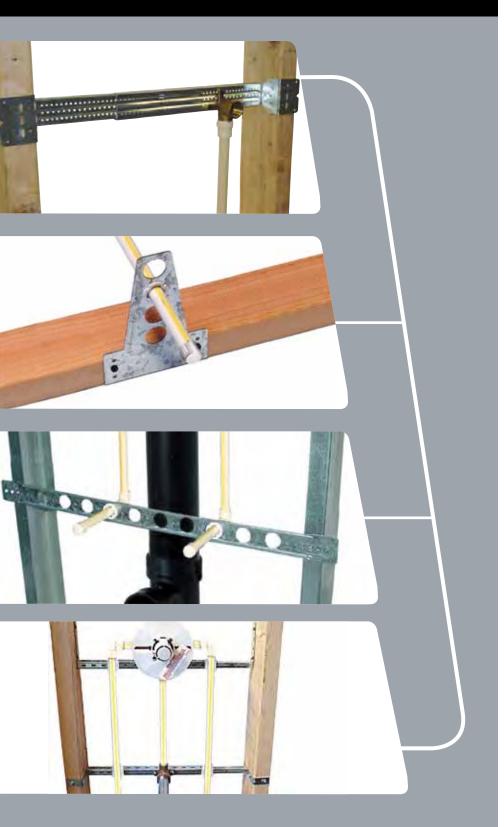


Lockable and **Glueable** Inserts

Grooved Inserts Create Stronger Glue Joint

Compatible with CPVC Tubing and Cements


Some Application Solutions Require No Glue



- LOCKRITE™ - #601-20, #601-26, #604, #605

- · Ideal for lavatory, sink, and toilet stub-out support
- · Galvanized steel bracket provides proper pipe positioning and alignment
- Inserts are lockable and glueable
- Inserts are grooved, creating a stronger glue joint

Model#	Size	For Pipe Size(s)	Box Qty
601-20	20"	1/2", 3/4" CTS	50
601-26	26"	1/2", 3/4" CTS	50
604	1" Diameter	1/2" CTS	100
605	1" Diameter	3/4" CTS	100



LOCKRITE™ – #609-N-6

- Ideal for toilet or hose bib stub-outs & functions as a nail plate
- Use in conjunction with #604 and #605 glueable inserts
- 16-gage galvanized steel bracket supports various heights from 2-1/4" 6"

7	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	609-N-6	6-3/4" X 5"	1/2", 3/4" CTS	50



HOLDRITE® - #103-18, #103-26

- Versatile bracket ideal for sink, lavatory & toilet stub-outs
- Galvanized steel bracket with 1-3/8" keyed holes on 2" centers
- Integrates with HOLDRITE #701 and other HOLDRITE inserts

2	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	103-18	20"	1/2", 3/4", 1" CTS	50
	103-26	26"	1/2", 3/4", 1" CTS	50



HOLDRITE LOCK-N-LOAD™ – #701

- Stub-out clamp ideal for lavatory/sink and toilet stub-outs
- Integrates with #103, #110-R, and #700 series brackets
- Compatible with CPVC, PEX, and Copper
- Tightens by hand No tools required
- Eliminates glue at the stub-out application
- · Secure fit prevents forward and backward movement
- Meets UL 94 V-2 requirements

9	Model#	Size	For Pipe Size(s)	Box Qty
	701	2" x 1-3/4"	1/2" CTS	50




HOLDRITE STOUT BRACKET® – #SB1S, #SB2S, #211, #212

- Multi-purpose galvanized bracket supports various application solutions
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- \bullet Telescoping design supports CPVC, PEX, Copper and other types of piping
- Numerous components integrate into multiple sides of the Stout Bracket
- Includes four screws
- CPVC tubing glues directly to clamp
- Meets UL 94 V-0 requirements

Mode	el#	Size	For Pipe Size(s)	Box Qty
SB1	s	10" to 18"	Various	50
SB2	s	13" to 25"	Various	50
211		1" X 1-1/4"	1/2" CTS	100
212	2	1" X 1-3/8"	3/4" CTS	100


CPVC Solutions CPVC Solutions



HOLDRITE STOUT BRACKET® – #SB3. #SB4

- Ideal for shower head, tub spout, vertical mid-span, and much more
- Supports both 2-eared and 3-eared 90s
- Telescoping design supports CPVC, PEX, and Copper tubing and other items
- Integrates with several HOLDRITE clamps and other industry standard components


Model#	Bracket Size	For Pipe Size(s)	Box Qty
SB3	10-1/4" to 17-1/2"	Various	50
SB4	15-1/4" to 25-1/2"	Various	50



HOLDRITE Rapid System[™] – #170, #170-26, #251, #170-251

- Low cost pipe support solution
- No tools or hardware required for #251 clamp attachment
- #170-251 sold in bulk packaging


		· ·	-	
9	Model#	Size	For Pipe Size(s)	Box Qty
	170	18" Bracket	Various	50
	170-26	26" Bracket	Various	50
	251	2-3/8" x 2-3/4"	1/2", 3/4", 1" CTS	50
	170-251	18" Bracket	1/2", 3/4", 1" CTS	50 Brackets/100 Clamps



HOLDRITE® CLAMPS - #221 - #226. #231 - #236

- · Ideal for CPVC, PEX, and Copper tubing
- #221 #226 are suspension clamps
- #231 #236 are 2-hole standard clamps


Model#	Clamp Size	For Pipe Size(s)	Bag Qty
221	1-7/8" X 1-1/2"	1/2" CTS	100
222	1-7/8" X 1-3/4"	3/4" CTS	100
223	2-3/8" X 2-1/8"	1" CTS	50
224	2-7/8" X 2-3/8"	1-1/4" CTS	25
225	2-7/8" X 2-3/4"	1-1/2" CTS	25
226	3-3/8" X 3-1/8"	2" CTS	25
231	2" X 7/8"	1/2" CTS	100
232	2-3/8" X 2-1/8"	3/4" CTS	100
233	2-3/4" X 2-1/2"	1" CTS	50
234	2-3/4" X 1-3/4"	1-1/4" CTS	25
235	3-1/8" X 2"	1-1/2" CTS	25
236	3-1/2" X 2-1/2"	2" CTS	25



- HOLDRITE® ISOLATORS - #424 - #426

- Metal thru-stud applications & fits HOLDRITE #121/#125 series brackets
- Positioning and dissimilar metal isolation for CPVC, PEX, and Copper tubing
- #424-#426 meets UL 94 HB requirements (UL 94 V-2 and Plenum-rated models are available)

Ž	Model#	Hole Size	Pipe Size	Bag Qty	Master Carton Qty
	424	1-11/32" & 1-3/8"	1/2" CTS	50	250
	425	1-11/32" & 1-3/8"	3/4" CTS	50	250
	426	1-11/32" & 1-3/8"	1" CTS	50	250




#121-RLS

- HOLDRITE® - #121-R, #121-W, #121-RLS

- Ideal for single pipe run support, including Copper, CPVC, and PEX
- #121-R provides 1-1/4" center line distance from structure
- #121-W provides a 2" center line distance from structure
 - #121-RLS provides a 3" center line distance from structure
 - Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
 - Bracket can be cast into concrete slab, then bent into position
 - Compatible with HOLDRITE #400 series and #261/#262 inserts

Model#	Size	For Pipe Size(s)	Box Qty
121-R	2" X 1-3/4" X 1-1/2"	1/2", 3/4", 1" CTS	25
121-W	3" X 1-3/4" X 3/4"	1/2", 3/4", 1" CTS	25
121-RLS	4-1/2" x 2-5/8" x 1"	1/2", 3/4", 1" CTS	50



- HOLDRITE® - #121-D, #121-DLS, #121-DS

- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- 121-D provides 2" center line distance from structure
- 121-DLS provides 3" center line distance from structure
- 121-DS provides 1--1/4" center line distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

5	Model#	Size	For Pipe Size(s)	Box Qty
	121-D	5" X 3" X 1"	1/2", 3/4", 1" CTS	25
	121-DLS	5" x 4-1/2" x 1"	1/2", 3/4", 1" CTS	25
	121-DS	5" x 2-1/4" x 1-3/4"	1/2", 3/4", 1" CTS	25



HOLDRITE® - #121-L

- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- Provides 2" and 4" center line height from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts


9	Model#	Size	For Pipe Size(s)	Box Qty
	121-L	5" X 2-1/2" X 2"	1/2", 3/4", 1" CTS	25

Specification sheets and application drawings for a variety of sink, tub, toilet, and other installations available on our website www.holdrite.com/tech



HOLDRITE® Residential

COPPER SUPPORT AND ALIGNMENT SOLUTIONS

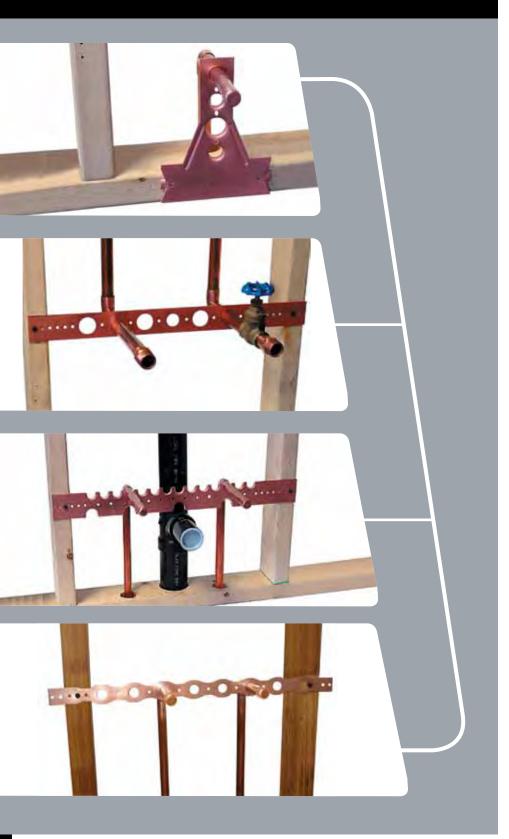

Unique Copper Bonding Process


Heat the Pipe, not the Bracket

Solutions for Various Applications

Support 1/2" to 1-1/4" CTS

Designed for Stud Bays up to 24"

Copper Residential



- HOLDRITE® - #100-18

- Ideal for lavatory/sink or toilet
- Unique design and manufacturing process provides a low cost support system
- · Copper-bonded, steel bracket
- 5/8" holes on 2" centers


Model#	Size	For Pipe Size(s)	Box Qty
100-18	20"	1/2" CTS	100



HOLDRITE® - #101-18, #101-18-R

- · Ideal for lavatory and toilet
- Ideal for copper bullets requiring a more rigid installation
- Copper-bonded, steel bracket
- #101-18-R extruded holes provide additional soldering surface
- 5/8" holes on 2" centers

Model#	Size	For Pipe Size(s)	Box Qty
101-18	20"	1/2" CTS	50
101-18-R	20"	1/2" CTS	25



HOLDRITE® – #102-18

- Ideal for water heater and relief line applications
- Copper-bonded, heavy-gage steel bracket
- Alternating 7/8" and 1-1/8" holes on 4" centers


3	Model#	Size	For Pipe Size(s)	Box Qty
	102-18	20"	3/4", 1" CTS	50



HOLDRITE[®] – #107-18

- Ideal for multiple applications such as lavatory, toilet and water heater
- Copper-bonded, heavy-gage steel bracket
- \bullet Holes on 2" centers for 1/2" tubing and holes on 4" centers for 3/4" & 1" tubing

Ŋ	Model#	Size	For Pipe Size(s)	Box Qty
	107-18	20"	1/2", 3/4", 1" CTS	50



HOLDRITE® - #108-20

- Ideal for multiple applications such as lavatory, toilet and water heater
- Rolled edges for extra strength and extruded holes for additional soldering surface
- · Copper-bonded steel bracket
- Holes on 2" centers for 1/2" tubing and holes on 4" centers for 3/4" & 1" tubing


7	Model#	Size	For Pipe Size(s)	Box Qty
	108-20	20"	1/2", 3/4", 1" CTS	50



HOLDRITE® - #150-20

- Ideal for multiple applications such as lavatory, toilet, & water heater
- 5/8" and 7/8" holes on 4" centers
- Copper-bonded, heavy-gage steel bracket


7	Model#	Size	For Pipe Size(s)	Box Qty
	150-20	20"	1/2", 3/4" CTS	50



HOLDRITE® - #140, #141

- #140 is ideal for lavatory, toilet and water heater applications
- Ideal for tubing that is capped prior to soldering onto bracket
- #141 is ideal for tub spout and shower diverter installations with split ends for horizontal and vertical mounting adding extra versatility
- Extruded notches for 1/2" tubing on 1" centers and 3/4" tubing on 4" centers


Model#	Size	For Pipe Size(s)	Box Qty
140	20"	1/2", 3/4" CTS	50
141	20"	1/2", 3/4" CTS	50



HOLDRITE[®] – #109-N-6

- Ideal for toilet stub-outs and also functions as a nail plate
- · Copper-bonded, heavy-gage steel bracket
- Supports 1/2" stub-outs at various heights from 2-1/4" 6" or a 3/4" stub-out at 3-1/2" height


Model#	Size	For Pipe Size(s)	Box Qty
109-N-6	6-1/2"	1/2", 3/4" CTS	50



HOLDRITE® – #101-F, #130 - #132

- #101-F is ideal for Copper tubing penetrating through the floor; 5/8" extruded hole
- #130-#132 is ideal for lavatory/sink, toilet, water heater, & others; Solid Copper clip for support of 1/2", 3/4", and 1" tubing


Model#	Size	For Pipe Size(s)	Box Qty
101-F	3" X 1-1/4"	1/2" CTS	50
130	2-1/4" X 2"	1/2" CTS	100
131	2-1/4" X 2-3/8"	3/4" CTS	100
132	2-1/4" X 2-5/8"	1" CTS	100



HOLDRITE® - #170-C, #170

- Ideal for multiple applications
- · Supports tubing in vertical and horizontal positions
- #170-C is a Copper-bonded, steel bracket, and can accept solder
- #170-S is galvanized steel bracket with (2) screws


Ø	Model#	Size	For Pipe Size(s)	Box Qty
	170-C	18" X 5/8"	Various	50
	170	18" X 5/8"	Various	50



-HOLDRITE® RAPID CLAMP - #251

- Mounts directly to #170 Bracket
- No tools or hardware required to install clamp onto #170 bracket
- Variable closure clamp supports up to 1" CTS


Model#	Clamp Size	For Pipe Size(s)	Bag Qty
#251	2-3/8" x 2-3/4"	1/2", 3/4", 1" CTS	50



HOLDRITE SILENCER™ – #250. #280

- · Ideal for sound-rated and isolation applications, lab tested
- Compatible with Copper, PEX, CPVC, iron pipe and other system materials
- Variable closure clamp mounts directly to Stout Bracket and EZ-Strut Bracket
- Supports up to 2" pipe sizes, with load ratings up to 300 lbs.


?	Model#	Clamp Size	For Pipe Size(s)	Box Qty
	250	2-3/8" X 2-5/8"	3/8" - 1" CTS	50
	280	4-3/8" X 5-1/8"	1" - 2" CTS/IPS	50



HOLDRITE STOUT BRACKET® – #SB1S, #SB2S

- Multi-purpose galvanized bracket supports various application solutions
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports Copper, PEX, CPVC, and other types of piping
- Numerous acoustically-rated components integrate into multiple sides of the Stout Bracket for superior strength and versatility
- Includes four screws

Ž	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	SB1S	10" to 18"	Various	50
	SB2S	13" to 25"	Various	50



HOLDRITE STOUT BRACKET® - #SB3, #SB4

- Ideal for shower head, tub spout, vertical mid-span, and much more
- Supports both 2-eared and 3-eared 90s
- Telescoping design supports CPVC, Copper, and PEX tubing and other items
- Integrates with several HOLDRITE clamps and other industry standard components


9	Model# Bracket Size		For Pipe Size(s)	Box Qty
	SB3	10-1/4" to 17-1/2"	Various	50
	SB4	15-1/4" to 25-1/2"	Various	50

HOLDRITE® Pipe Support Brackets are **Made in the USA** and meet the **Buy American Act**. These iconic solutions are ideal for government and military projects.



HOLDRITE® Commercial

COPPER SUPPORT AND ALIGNMENT SOLUTIONS

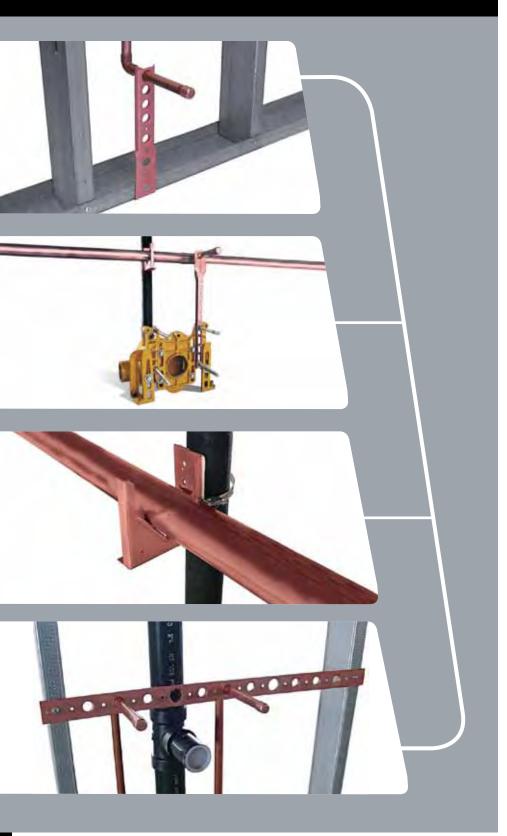

Unique Copper Bonding Process

Heat the Pipe, not the Bracket

Ideal for Pre-Fab on the job or at the shop


Copper Commercial



☐ HOLDRITE® — #101-26, #101-26-R

- · Ideal for lavatory and toilet
- Ideal for copper bullets requiring a more rigid installation
- · Copper-bonded, steel bracket
- #101-26-R extruded holes provide additional soldering surface
- 5/8" holes on 2" centers (#101-26-R also has two 7/8" holes on 8" centers)

Model#	Size	For Pipe Size(s)	Box Qty
101-26	26"	1/2" CTS	50
101-26-R	26"	1/2", 3/4" CTS	25



HOLDRITE[®] – #102-26

- Ideal for water heater and relief line applications
- Copper-bonded, heavy-gage steel bracket
- Alternating 7/8" and 1-1/8" holes on 4" centers


3	Model#	Size	For Pipe Size(s)	Box Qty
	102-26	26"	3/4", 1" CTS	50



HOLDRITE[®] – #107-26

- Ideal for multiple applications such as lavatory, toilet and water heater
- · Copper-bonded, heavy-gage steel bracket
- Holes on 2" centers for 1/2" tubing and holes on 4" centers for 3/4" & 1" tubing
- #107-26 also has two holes for 1-1/4" tubing on 8" centers

Model#	Size	For Pipe Size(s)	Box Qty
107-26	26"	1/2", 3/4", 1", 1-1/4" CTS	50



HOLDRITE[®] – #108-26

- Ideal for multiple applications such as lavatory, toilet and water heater
- Rolled edges for extra strength and extruded holes for additional soldering surface
- Copper-bonded steel bracket
- \bullet Holes on 2" centers for 1/2" tubing and holes on 4" centers for 3/4" & 1" tubing

Model#	Size	For Pipe Size(s)	Box Qty
108-26	26"	1/2", 3/4", 1", CTS	50



www.holdrite.com

- HOLDRITE® - #150-26

- Ideal for multiple applications such as lavatory, toilet, & water heater
- 5/8" and 7/8" holes on 4" centers
- Copper-bonded, heavy-gage steel bracket

Model#	Size	For Pipe Size(s)	Box Qty
150-26	26"	1/2", 3/4" CTS	50



HOLDRITE® - #109-A-9

- Ideal for toilet applications
- Copper-bonded, heavy-gage steel L-bracket
- Six 5/8" holes at 2-3/4", 4-1/2", 6", 7", 8" and 9"
- Most holes are extruded for additional strength


3	Model#	Size	For Pipe Size(s)	Box Qty
	109-A-9	9-1/2"	1/2" CTS	50



HOLDRITE[®] – #110-S-1/2

- Ideal for lavatory and sink
- Easy pre-fabrication at the shop or on the job site
- Install directly to the waste/vent pipe prior to studs being erected
- Copper-bonded, heavy-gage steel bracket
- Self-locking stainless steel band and self-adhesive isolating felt included
- For 1/2" Copper tubing on 4", 6" and 8" centers


7	Model#	Size	For Pipe Size(s)	Box Qty
	110-S-1/2	9-1/4" X 2-1/2"	1/2" CTS	50



HOLDRITE® - #111-S

- Ideal for vertical or horizontal installations and fits in 3-1/2" or wider wall
- Copper-bonded, steel bracket mounts directly to waste/vent pipe
- Self-locking stainless steel band and self-adhesive isolating felt included
- Supports 1/2" tubing on 4", 6", 8" centers and 3/4" tubing on 4" and 8" centers

>	Model#	Size	For Pipe Size(s)	Box Qty
	111-S	9-1/2" X 1-1/2"	1/2", 3/4" CTS	50



HOLDRITE® - #114-C, #114-CO, #114-CR

- For 1" flush valve support on 4-bolt wall hung toilet carriers
- Copper-bonded, heavy-gage steel brackets mount directly to 4-bolt toilet carrier and position flush valve at height of 11-1/2" above toilet
- Allows for rough-in prior to framing being erected
- 4-1/2" offset center line rough-in with #114-C and #114-CR
- #114-CO provides 4-3/4" off set rough-in (right or left hand)
- #114-CR allows for support of pre-capped stub out

Model#	Size	For Pipe Size(s)	Box Qty
114-C	23-1/4" X 2-1/2"	1" CTS	6
114-CO	23-1/4" X 2-1/2"	1" CTS	6
114-CR	23-1/4" X 2-1/2"	1" CTS	6



HOLDRITE® – #114-COH

- Copper-Bonded offset carrier bracket secures flush valve stub out to 4-bolt toilet carrier
- Has hinged top to allow for fabricated water header access
- Provides for a 4-3/4" offset for 1" copper flush valve at 11-1/2" above toilet
- · Ideal for pre-fabrication


Model#	Size	For Pipe Size(s)	Box Qty
114-COH	23-1/4" X 2-1/2"	1" CTS	6



☐ HOLDRITE® — #114-C-EXT

- Ideal for toilet carriers where extended rough-in height is needed
- Copper-bonded, heavy-gage steel brackets mount directly to 4-bolt closet carrier
- Adds an additional 8-1/2" to 24-1/2" height to carrier bracket (includes hardware)
- Compatible with HOLDRITE #114 series brackets


Model#	Size	For Pipe Size(s)	Box Qty
114-C-EXT	27" X 1"	N/A	6



HOLDRITE® - #115, #115-C


- Multiple horizontal/vertical mounting applications
- Easy pre-fabrication at the shop or on the job site
- Galvanized steel bracket mounts directly to the waste/vent pipe prior to studs being erected
- Supports 1/2" to 2" tubing and comes with self-locking stainless steel band, metal straps, screws and self-adhesive isolating felt strip


9	Model#	Size	For Pipe Size(s)	Box Qty
	115	7-1/2" X 2"	1/2"-2" CTS/IPS	25
	115-C	7-1/2" X 2"	1/2"-2" CTS/IPS	25



HOLDRITE® - #118-T-6. #118-T-8

- Ideal for lavatory/sink stub outs or vertical mid-span support
- Easy pre-fabrication at the shop or on the job site
- Install directly to the waste/vent pipe prior to studs being erected
- Copper-bonded, heavy-gage steel bracket
- #118-T-6 Supports 1/2" tubing on 4" and 8" centers and 3/4" tubing on 6" centers
- #118-T-8 Supports 1/2" tubing on 4" and 6" centers and 3/4" tubing on 8" centers
- Fits within a 2-1/2" stud wall when mounted to a 1-1/2" or 2" pipe
- Self-locking stainless steel band and self-adhesive isolating felt included





HOLDRITE® – #121

- Ideal for vertical single runs
- Install directly to the waste/vent pipe or building structure prior to studs being erected
- Galvanized steel bracket
- Use in conjunction with #100 series inserts & #1004/#1005 steel bands
- Unique "U" shape support for 1/2", 3/4", and 1" tubing

Model#	Size	For Pipe Size(s)	Box Qty
121	2" X 1-1/2"	1/2", 3/4", 1" CTS	25



HOLDRITE® – #V-2

- Ideal for horizontal applications such as plumbing chase walls
- Easy pre-fabrication at the shop or on the job site
- Mounts to waste/vent pipe or building structure prior to studs being erected
- · Copper-bonded, heavy-gage steel bracket
- Supports 1/2" to 3" tubing with a 250-pound load capacity
- Comes with self-locking stainless steel band and isolating felt pad

3	Model#	Size	For Pipe Size(s)	Box Q
	V-2	4-1/2" X 4-1/2"	1/2" - 3" CTS	25






HOLDRITE® ISOLATORS – #404-R - #406-R

- Ideal for metal studs with Copper, PEX, and CPVC tubing
- Meets UL 94 V-2 requirements
- Compatible with #103, #121, #125, #700 and #110-R series brackets
- Tubing size up to 1" (1-3/8" or 1-11/32" holes)


)	Model#	Hole Needed	For Pipe Size(s)	Box Qty
	404-R	1-3/8" Diameter	1/2" CTS	100
	405-R	1-3/8" Diameter	3/4" CTS	100
	406-R	1-3/8" Diameter	1" CTS	100



HOLDRITE® ISOLATORS - #424 - #426

- Ideal for metal thru-stud applications and integrates with HOLDRITE #121, #125 and #103 series brackets
- Positioning and dissimilar metal isolation for Copper, CPVC, and PEX tubing
- Meets UL 94 HB requirements
- UL 94 V-2 and Plenum-rated models are available


Model#	Hole Size	Pipe Size	Bag Qty	Master Carton Qty
424	1-11/32" & 1-3/8"	1/2" CTS	50	250
425	1-11/32" & 1-3/8"	3/4" CTS	50	250
426	1-11/32" & 1-3/8"	1" CTS	50	250



-HOLDRITE® SUSPENSION CLAMPS – #221 - #226

- · Ideal for Copper, PEX, and CPVC tubing
- Mounts directly on HOLDRITE STOUT BRACKET or other surfaces
- Tubing size up to 2"

Model#	Clamp Size	For Pipe Size(s)	Box Qty
221	1-7/8" X 1-1/2"	1/2" CTS	100
222	1-7/8" X 1-3/4"	3/4" CTS	100
223	2-3/8" X 2-1/8"	1" CTS	50
224	2-7/8" X 2-3/8"	1-1/4" CTS	25
225	2-7/8" X 2-3/4"	1-1/2" CTS	25
226	3-3/8" X 3-1/8"	2" CTS	25



- HOLDRITE® STANDARD CLAMPS - #231 - #236

- Ideal for Copper, PEX, and CPVC tubing
- Mounts directly on HOLDRITE STOUT BRACKET or other surfaces

Model#	Clamp Size	For Pipe Size(s)	Box Qty
231	2" X 7/8"	1/2" CTS	100
232	2-3/8" X 2-1/8"	3/4" CTS	100
233	2-3/4" X 2-1/2"	1" CTS	50
234	2-3/4" X 1-3/4"	1-1/4" CTS	25
235	3-1/8" X 2"	1-1/2" CTS	25
236	3-1/2" X 2-1/2"	2" CTS	25



- HOLDRITE SILENCER™ - #250, #280

- Ideal for sound-rated and isolation applications, lab tested
- Compatible with Copper, PEX, CPVC, iron pipe and other system materials
- Variable closure clamp mounts directly to Stout Bracket and EZ-Strut Bracket
- Supports up to 2" pipe sizes, with load ratings up to 300 lbs.
- Framework meets UL 94 V-2 flame rating


9	Model#	Clamp Size	For Pipe Size(s)	Box Qty
	250	2-3/8" X 2-5/8"	3/8" - 1" CTS	50
	280	4-3/8" X 5-1/8"	1" - 2" CTS/IPS	50



HOLDRITE STOUT BRACKET® - #SB1S. #SB2S

- Multi-purpose galvanized bracket supports various application solutions
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports Copper, PEX, CPVC, and other types of piping
- · Numerous acoustically-rated components integrate into multiple sides of the Stout Bracket for superior strength and versatility
- Includes four screws

9	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	SB1S	10" to 18"	Various	50
	SB2S	13" to 25"	Various	50



-HOLDRITE STOUT BRACKET® – #SB3, #SB4

- Ideal for shower head, tub spout, vertical mid-span, and much more
- Supports both 2-eared and 3-eared 90s
- Telescoping design supports CPVC, Copper, PEX tubing and other items
- Integrates with several HOLDRITE clamps and other industry standard components



7	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	SB3	10-1/4" to 17-1/2"	Various	50
	SB4	15-1/4" to 25-1/2"	Various	50









HOLDRITE® - #121-R, #121-W, #121-RLS

- Ideal for single pipe run applications including Copper, CPVC, and PEX
- #121-R provides 1-1/4" center line distance from structure
- #121-W provides a 2" center line distance from structure
- #121-RLS provides 3" center line distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

1	Model#	Size	For Pipe Size(s)	Box Qty
	121-R	2" X 1-3/4" X 1-1/2"	1/2", 3/4", 1" CTS	25
I	121-W	3" X 1-3/4" X 3/4"	1/2", 3/4", 1" CTS	25
	121-RLS	4-1/2" x 2-5/8" x 1"	1/2", 3/4", 1" CTS	50








HOLDRITE® - #121-D, #121-DS, #121-DLS

- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- #121-D provides 2" centerline distance from structure
- #121-DS provides 1-1/4" centerline distance from structure
- #121-DLS provides 3" centerline distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts


Model#	Size	For Pipe Size(s)	Box Qty
121-D	5" X 3" X 1"	1/2", 3/4", 1" CTS	25
121-DS	5" x 2-1/4" x 1-3/4"	1/2", 3/4", 1" CTS	25
121-DLS	5" x 4-1/2" x 1"	1/2", 3/4", 1" CTS	25



HOLDRITE® - #121-L

- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- Provides 2" and 4" centerline distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

Model#	Size	For Pipe Size(s)	Box Qty
121-L	5" X 2-1/2" X 2"	1/2", 3/4", 1" CTS	25



HOLDRITE® - #121-0

- Ideal for three pipe run applications including Copper, CPVC, and PEX
- Provides 1-1/4", 2-3/8", 3-1/2" centerline distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts.

3	Model#	Size	For Pipe Size(s)	Box Qty
	121-0	4-1/2" X 4" X 1-1/2"	1/2", 3/4", 1" CTS	25



HOLDRITE® HANGOVER - #125-D

- Cast-in-place concrete hanger bracket for horizontal support
- Galvanized steel bracket with 1-1/4", 2", 4" centerline distance from structure
- Meets MSS-SP-58 load requirements
- Compatible with HOLDRITE #400 series and #261/#262 inserts

Model#	Size	For Pipe Size(s)	Box Qty
125-D	9-5/8" x 5"	1/2", 3/4", 1" CTS	50

HOLDRITE® #117 Series

NO-HUB FITTING SUPPORT AND RESTRAINT SOLUTIONS

ENGINEERED SOLUTION



Ideal for Restraining Hubless
Cast Iron Soil Pipe Joints against
Separation during High Thrust
Conditions

Engineered to meet Plumbing Codes, Pipe Manufacturers' Installation Instructions and CISPI Installation Handbook

Available in Numerous

Configurations and Sizes up to 15"

Built with Stainless Steel and Galvanized Components

No Special Tools are Needed for Installation

No Field Cutting or Modifications Needed

All Components Included in Each Kit



No-Hub Fitting Restraints No-Hub Fitting Restraints



HOLDRITE® Short Sweep Quarter Bend -K Series

- 90° bend support kit
- (2) Galvanized steel straps with (5) stainless steel band clamps up to 8"
- Heavy-duty steel pipe clamps and galvanized steel straps for 10"-15"

Model#	For Pipe Size(s)	Box Qty
117-3K	2" - 3"	6
117-4K	4"	6
117-5K	5"	6
117-6K	6"	6
117-8K	8"	6
117-10K	10"	2
117-12K	12"	1
117-15K	15"	1



HOLDRITE® Eighth Bend - L Series

- 45° bend support kit
- (2) Galvanized steel straps with (5) stainless steel band clamps up to 8"
 Heavy-duty steel pipe clamps and galvanized steel straps for 10"-15"

For Pipe Size(s)	Box Qty
3"	1
4"	1
5"	1
6"	1
8"	1
10"	1
12"	1
15"	1
	3" 4" 5" 6" 8" 10" 12"



HOLDRITE® Wye and Eighth Bend with Blind Plug

- CE Series
 End of the line combo Wye and Eighth Bend fitting with blind plug or clean out support kit
- (3) Galvanized steel straps with (6) stainless steel band clamps

Model#	For Pipe Size(s)	Box Qty
117-3CE	3"	1
117-4CE	4"	1
117-4x3CE	4" x 3"	1
117-5CE	5"	1
117-5x4CE	5" x 4"	1
117-6CE	6"	1
117-6x5CE	6" x 5"	1
117-6x4CE	6" x 4"	1
117-8CE	8"	1
117-8x6CE	8" x 6"	1
117-8x5CE	8" x 5"	1
117-8x4CE	8" x 4"	1

*10"-15" sizes coming in 2012

See Installation Instructions for Hardware Torque Requirements and Head Pressure Ratings



HOLDRITE® Wye and Eighth Bend - CM Series Combination Wye and Eighth Bend fitting support kit (for mid-stream

- (3) Galvanized steel straps with (6) stainless steel band clamps

Model#	For Pipe Size(s)	Box Qty
117-3CM	3"	1
117-4CM	4"	1
117-4x3CM	4" x 3"	1
117-5CM	5"	1
117-5x4CM	5" x 4"	1
117-6CM	6"	1
117-6x5CM	6" x 5"	1
117-6x4CM	6" x 4"	1
117-8CM	8"	1
117-8x6CM	8" x 6"	1
117-8x5CM	8" x 5"	1
117-8x4CM	8" x 4"	1

*10"-15" sizes coming in 2012



HOLDRITE® Wye/ Santee - W Series

- Wye/ Santee fitting support kit
- (2) Galvanized steel straps with (4) stainless steel band clamps

Model#	For Pipe Size(s)	Box Qty
117-4W	4"	1
117-4x3W	4" x 3"	1
117-5W	5"	1
117-5x4W	5" x 4"	1
117-6W	6"	1
117-6x5W	6" x 5"	1
117-6x4W	6" x 4"	1
117-8W	8"	1
117-8x6W	8" x 6"	1
117-8x5W	8" x 5"	1
117-8x4W	8" x 4"	1
117-8x3W	8" x 3"	1

^{*10&}quot;-15" sizes coming in 2012



HOLDRITE® Blind Plug (Cap) Support -**BP Series**

• (2) Galvanized steel straps with (4) stainless steel band clamps

Model# For Pipe Size(s)		Box Qty
117-3BP	2" - 3"	1
117-4BP	4"	1
117-5BP	5"	1
117-6BP	6"	1
117-8BP	8"	1

*10"-15" sizes coming in 2012



- HOLDRITE® Short Reducer Support - R Series

- Reducer Restraint Kit
- (2) Galvanized steel straps with (4) stainless steel band clamps

Model#	For Pipe Size(s)	Box Qty
117-4x2R	4" x 2"	1
117-4x3R	4" x 3"	1
117-5x2R	5" x 2"	1
117-5x3R	5" x 3"	1
117-5x4R	5" x 4"	1
117-6x2R	6" x 2"	1
117-6x3R	6" x 3"	1
117-6x4R	6" x 4"	1
117-6x5R	6" x 5"	1
117-8x2R	8" x 2"	1
117-8x3R	8" x 3"	1
117-8x4R	8" x 4"	1
117-8x5R	8" x 5"	1
117-8x6R	8" x 6"	1

*10"-15" sizes coming in 2012



- · Supports end-to-end cast iron pipe joints
- · Coupling Restraint Kit
- (2) Galvanized steel straps with (4) stainless steel band clamps up to 8"
- Heavy-duty steel pipe clamps and galvanized steel straps for 10"-15"

Model#	For Pipe Size(s)	Box Qty
117-3S	2" - 3"	1
117-4S	4"	1
117-5S	5"	1
117-6S	6"	1
117-8S	8"	1
117-10S	10"	1
117-12S	12"	1
117-15S	15"	1

HOLDRITE® C/O Support - T Series

- Retention Strap Kit
- (2) Galvanized steel straps with (4) stainless steel band clamps


Model#	Box Qty	
117-3T	2" - 3"	1
117-4T	4"	1
117-5T	5"	1
117-6T	6"	1
117-8T	8"	1

*10"-15" sizes coming in 2012

See Installation Instructions for Hardware Torque Requirements and Head Pressure Ratings

HOLDRITE Stout Bracket®

TELESCOPING SUPPORT AND **ALIGNMENT SOLUTIONS**

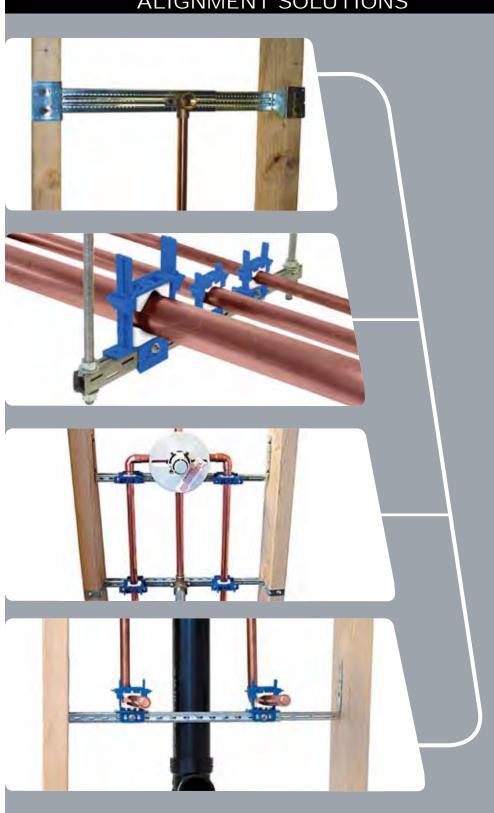


Superior Strength and Telescoping Design

Supports Copper, PEX, CPVC and Other Material Types

Numerous Components
Integrate Directly
into Multiple Sides of
Brackets


Ideal for Vertical or **Horizontal Installations**



HOLDRITE STOUT BRACKET® – #SB1, #SB2, #SB1S, #SB2S

- Multi-purpose galvanized steel bracket supports various application solutions
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports Copper, PEX, CPVC, and many other types of piping
- Numerous clamps and fittings integrate onto multiple sides of the Stout Bracket for superior strength and versatility
- SB1S and SB2S includes four screws

3	Model#	Size	For Pipe Size(s)	Box Qty
	SB1	10" to 18"	Various	50
	SB1S	10" to 18"	Various	50
	SB2	13" to 25"	Various	50
	SB2S	13" to 25"	Various	50



- HOLDRITE STOUT BRACKET® – #SB3, #SB4

- · Ideal for shower head, tub spout, vertical mid-span, and much more
- Supports both 2-eared and 3-eared 90s
- Telescoping design supports CPVC, Copper, PEX tubing and other items
- Integrates with several HOLDRITE clamps and other industry standard components


9	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	SB3	10-1/4" to 17-1/2"	Various	50
	SB4	15-1/4" to 25-1/2"	Various	50



HOLDRITE EZ-STRUT™ – #EZ-1. #EZ-2


- Galvanized steel trapeze platform with telescoping design
- Ideal for multiple pipe run application including gas, Copper, CPVC, PEX
- Sizing from 12" to 40" with load rating of up to 1000 pounds
- Compatible with HOLDRITE #250 & #280 clamps & other industry clamps
- Attaches to standard 3/8" all-thread rod
- · Includes four screws

Model#	Size	For Pipe Size(s)	Box Qty
EZ-1	12" to 21"	Various	25
EZ-2	23" to 40"	Various	25



-HOLDRITE STOUT BRACKET® – #SB1-2502, #SB2-2502

- \bullet Multi-purpose galvanized steel bracket, with (2) HOLDRITE® #250 clamps, and (4) screws
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports Copper, PEX, CPVC, and many other types of piping
- Numerous clamps and fittings integrate into multiple sides of the Stout Bracket for superior strength and versatility
- Framework rated to UL 94 V-2





-HOLDRITE® PRO CLAMP - #201, #202

- Ideal for securing single Copper, PEX, CPVC tubing to Stout Bracket® or #170 Bracket
- Nylon clamps attach with a single fastener
- Flame rated per UL 94 V-2 standards

9	Model#	Size	For Pipe Size(s)	Box Qty
	201	2-1/8" X 1-7/8"	1/2" CTS	50
	202	2-1/8" X 2-1/8"	3/4" CTS	50



-HOLDRITE SNAP CLAMP® - #211, #212

- Half moon shapped, fire retardant PVC clamp
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- CPVC tubing glues directly to clamp
- Meets UL 94 V-0 requirements
- Mounts to Stout Brackets, #170 Bracket or framing members

7	Model#	Size	For Pipe Size(s)	Box Qty
	211	1" X 1-1/4"	1/2" CTS	100
	212	1" X 1-3/8"	3/4" CTS	100



HOLDRITE® VARIABLE SIZE CLAMPS – #250, #280

- Ideal for noise and vibration isolation and dissimilar metal isolation
- Compatible with Copper, PEX, CPVC, CSST, PVC, Steel, & other materials
- Variable closure clamp mounts directly to Stout Bracket & EZ-Strut Bracket
- Supports up to 2" pipe sizes with sound rating lab tested
- Framework rated to UL 94 V-2

>	Model#	Size	For Pipe Size(s)	Box Qty
	250	2-3/8" X 2-5/8"	3/8" to 1" CTS	50
	280	4-3/8" X 5-1/8"	1" to 2" CTS/IPS	50



HOLDRITE SILENCER™ – #255. #285


- · Ideal for sound-rated and isolation applications, lab tested
- Compatible with Copper, PEX, CPVC, iron pipe and other system materials
- Flat base, variable closure clamp mounts directly to #SB3 & #SB4, wood, metal, or other flat surfaces
- Supports up to 2" pipe sizes, with load ratings up to 300 lbs.
- Framework rated to UL 94 V-2

Model#	Clamp Size	For Pipe Size(s)	Box Qty
255	2-7/8" X 2"	3/8" - 1" CTS	50
285	4-3/8" X 4"	1" - 2" CTS/IPS	50

2 #0.DRITE 800.321.0316 • Fax 760.744.0507 www.holdrite.com #0.DRITE 5

HOLDRITE SILENCER™



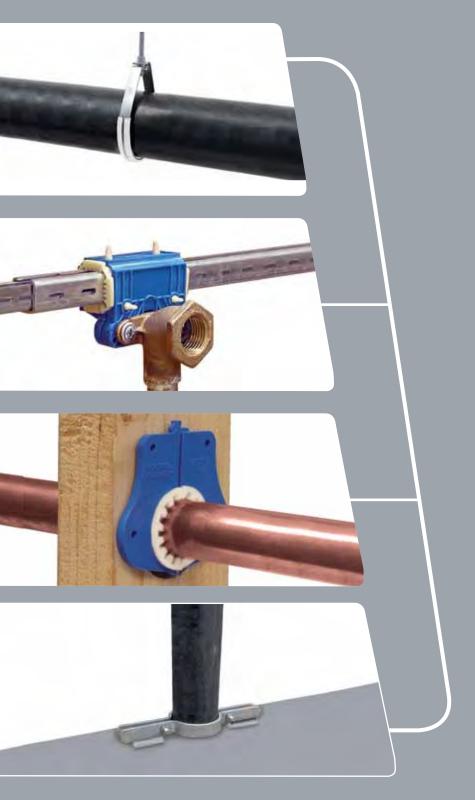

ISO-3822 Third Octave Lab Tested

Integrates with HOLDRITE® Pipe Support Systems


Reduces Plumbing Noise and Vibration

Compatible with Copper, PEX, CPVC, Cast Iron and Other **Materials**

Field Tested and Proven

HOLDRITE Silencer™ Acoustical Product Specifications

PRODUCT SPECIFICATION DRAWING HOLDRITE® Silencer™ Through-Stud / Suspension Clamp #261 & #262

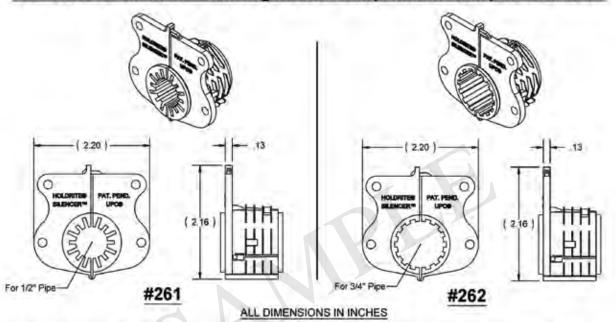


Model #'s 261 and 262 can be used as a suspension hanger, e.g., from a joist or cross-member or a HOLDRITE® Stout Bracket™, or as a through-hole isolator in wood or up to 14 gage metal framing into a 1-11/32" - 1-3/8" hole. As a through-hole isolator, they can also be used with HOLDRITE® #103, #121, and #709 series brackets. These models are used for securing and retaining tubing while providing superior acoustical isolation between the tubiing and the supporting structure. Supports 1/2" and 3/4" CTS tube sizes. Supports Copper, PEX, CPVC tubing, cunduit, etc. UPC listed.

Product Information:


- Shell: Polypropylene, blue, FR UL94-V2 Isolators: TPE, natural (off-white), 45 shore A
- Temperature Range: -10°F to 140°F (suspension) -10°F to 180°F (through-stud)
- Load rating: 25 pounds in suspension mode
- UPC / IPC listed
- IAPMO listed, per standard PS42-96
- Patent Pending

THIS INFORMATION IS PROPRETARY TO HOLDRITE AND IS SUBJECT TO CHANGE





HOLDRITE Silencer[™] Acoustical **Test Data**

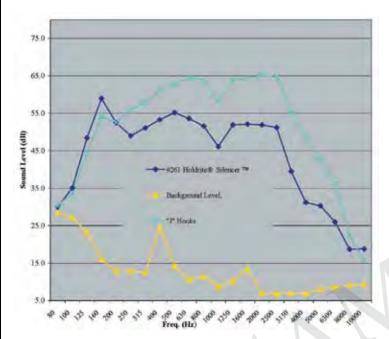

TEST: Noise and Vibration Isolation

APPLICATION TESTED: Thru-Stud

Penetrations

TEST RESULTS

DATE: 8/8/2006

TEST 1: HOLDRITE® Silencer™ #261

TEST 2: Copper-plated "J" Hook

PIPE SIZE: 1/2" Copper Tubing WALL TYPE: 2 x 4 Wood Stud

		Sound Level, dB (rc. 0.0002 µbar)		
L/3 Octave	Background Level,	#261 Holdrite® Silencer TM	"J" Hooks	
Freq (Hz)	L _{og} (dB)	L _{eq} (dB)	Leg (dB)	
80	28,5	30.0	30.4	
100	27.2	35.1	33.7	
125	23.3	48.4	44.2	
160	16.1	59.0	54.2	
200	12.8	52.5	52.6	
250	12.9	49.0	55.9	
315	12.6	51.1	58.0	
400	24.7	53.3	60.9	
500	14.3	55.2	62.7	
630	10.6	53.6	64.5	
800	11.4	51.6	63.8	
1000	8.7	46.1	58.0	
1250	10.2	51.9	63.9	
1600	13.5	52.1	64.3	
2000	7.0	51.9	65.2	
2500	6.8	51.2	64.7	
3150	7.0	39.5	55.1	
4000	6.9	31.2	48.8	
5000	8.0	30.3	42.7	
6300	8.6	26.0	36.2	
8000	9.1	18.7	22.4	
10000	9.3	18.8	15.7	

Independently lab tested by an ISO-3822 certified lab


Resulting acoustic spectra were analyzed in 1/3 octave bands, from 80 Hz to 10,000 Hz

Other HOLDRITE Silencer™ application solution data available upon request

Change in Sound Pressure Level (4 or -)	Change in Apparent Loudness
3 dB	Just Perceptible
5 dB	Clearly Noticeable
10 dB	Twice (or 1/2) as Loud
15 dB	Three (or 1/3) as Loud
20 dB	Four (or 1/4) as Loud

A comprehensive collection of Specification Sheets and Acoustical Data for all HOLDRITE Silencer™ products is available in the HOLDRITE Silencer Acoustical Submittal Pack. Visit www.holdrite.com/tech/submittal_pack


73.0



- HOLDRITE SILENCER™ - #250, #280

- · Ideal for sound-rated and isolation applications, lab tested
- Compatible with Copper, PEX, CPVC, iron pipe and other system materials
- Variable closure clamp mounts directly to Stout Bracket and EZ-Strut Bracket
- Supports up to 2" pipe sizes, with load ratings up to 300 lbs.

7	Model#	Clamp Size	For Pipe Size(s)	Box Qty
	250	2-3/8" X 2-5/8"	3/8" - 1" CTS	50
	280	4-3/8" X 5-1/8"	1" - 2" CTS/IPS	50



- HOLDRITE SILENCER™ – #255. #285

- · Ideal for sound-rated and isolation applications, lab tested
- Compatible with Copper, PEX, CPVC, iron pipe and other system materials
- Flat base, variable closure clamp mounts directly to #SB3 & #SB4, wood, metal, or other flat surfaces
- Supports up to 2" pipe sizes, with load ratings up to 300 lbs.

7	Model#	Clamp Size	For Pipe Size(s)	Box Qty
	255	2-7/8" X 2"	3/8" - 1" CTS	50
	285	4-3/8" X 4"	1" - 2" CTS/IPS	50



HOLDRITE® VARIABLE STRUT CLAMP – #257-P, #287-P

- Ideal for securing Copper, PEX, CPVC, and other piping directly to strut/ channel
- No tools required and eliminates need for over 20 strut clamp SKUs
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds
- Includes isolation pads to minimize noise and vibration, lab tested
- Provides dissimilar metal isolation



Model#	Size	For Pipe Size(s)	Box Qty
257-P	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
287-P	3-1/2" x 4-7/8"	1" - 2" CTS / IPS	50



HOLDRITE SILENCER™ – #261 - #264

- · Ideal for sound-rated and isolation applications, lab tested
- · Compatible with Copper, PEX, and CPVC tubing
- Thru-stud insert/suspension clamp, dual purpose design
- Integrates directly with Stout Bracket, EZ-Strut Bracket or framing members
- Supports up to 1-1/4" tubing



7	Model#	Hole Needed	For Pipe Size(s)	Box Qty
	261	1-3/8" Diameter	1/2" CTS	50
	262	1-3/8" Diameter	3/4" CTS	50
	263	2" Diameter	1" CTS	50
	264	2" Diameter	1-1/4" CTS	50



HOLDRITE SILENCER™ – #265

- Shower head/tub spout acoustical anchor point clamp, lab tested
- Ideal for minimizing noise transfer to the building system
- Mounts directly to the HOLDRITE Stout Bracket (SB1 + SB2)
- Two screws included

Two dorews included							
	Model#	Clamp Size	Box Qty				
	265	2-1/4" X 1-5/8" X 1-1/8"	50				


23.8

Acoustic Isolation Acoustic Isolation











- Ideal for sound-rated and isolation applications for Copper, PEX, CPVC, PVC, Iron pipe, ABS, and Cast Iron
- Attaches to loop hangers and HOLDRITE Stout Bracket

Model#	Size	Hanger Size	Box Qty
270	3/4" Wide	Various	50' Roll

HOLDRITE SILENCER™ – #271

- · Lab-tested, self-adhesive rubber isolation liner
- Ideal for sound-rated and isolation applications for Copper, PEX, CPVC, PVC, Iron pipe, ABS, and Cast Iron
- Attaches to hangers or works as a pipe wrap


Model#	Size	Hanger Size	Box Qty
271	2" Wide	Various	25' Roll

HOLDRITE SILENCER™ – #272-2, #Felt 100

- · Lab-tested, self-adhesive white polyester felt
- Ideal for sound-rated and isolation applications for Copper, PEX, CPVC, PVC, Iron pipe, ABS, and Cast Iron
- Eliminates dissimilar metal contact and minimizes noise/vibration transfer
- #272-2 is 1/4" thick. Felt 100 is 1/8" thick

Model#	Size	Tube / Pipe Size	Box Qty
272-2	2" X 1/4" X 25'	Various	25' Roll
Felt 100	2-1/4" X 1/8" X 100'	Various	100' Roll









— HOLDRITE SILENCER™ – #274, #275, #275-T, #276, #278

- #274, #275, #275-T have lab-tested, Neoprene white vibration isolation pad
- Rubber vibration isolation pad ideal for riser clamps or equipment support
- Minimizes noise and vibration transfer at piping stacks and risers
- #275, #275-T, & #278 includes additional 10-gage, galvanized steel bearing plate
- #275-T includes vertical tabs for keeping riser clamp in place

Model#	Size	Pipe Size	Box Qty
274	2" X 2" X 3/4"	Various	180
275	2" X 2" X 7/8"	Various	144
275-T	2" X 2" X 7/8"	Various	144
276	2" X 2" X 1/4"	Various	50
278	2" X 2" X 1/4"	Various	50



HOLDRITE® SWIVEL LOOP HANGERS – #300 - #310

- Ideal for noise & vibration isolation and dissimilar metal isolation
- Galvanized steel loop hanger with 3/8" swivel nut and rubber liner
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)

Model#	For Pip	For Pipe Size(s)	
Model#	IPS Size	CTS Size	Box Qty
300	n/a	1/2"	100
301	1/2"	3/4"	100
302	3/4"	1"	100
303	1"	1-1/4"	100
304	1-1/4" - 1-1/2"	1-1/2"	100
306	2"	2"	100
307	2-1/2"	2-1/2"	50
308	3"	3"	50
310	4"	4"	25



HOLDRITE® J-HANGERS – #320 - #330

- Ideal for noise & vibration isolation and dissimilar metal isolation
- · Galvanized steel J-hanger with rubber liner
- Conforms with Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 5)


Madal#	For Pip	oe Size(s)	Boy Oty
Model#	IPS Size	CTS Size	Box Qty
320	n/a	1/2"	50
321	1/2"	3/4"	50
322	3/4"	1"	50
323	1"	1-1/4"	50
324	1-1/4"	1-1/2"	50
325	1-1/2"	2"	50
326	2"	2-1/2"	50
327	2-1/2"	3"	25
328	3"	n/a	25
330	4"	4"	25



HOLDRITE EZ-STRUT™ – #EZ-1. #EZ-2


- Ideal for multiple pipe run applications including Gas, Copper, CPVC, & PEX
- · Galvanized steel trapeze platform with telescoping design
- Works best with HOLDRITE #250 and #280 Clamps
- Attaches to standard all-thread rod with load rating up to 1,000 pounds
- Includes four screws

Model#	Size	For Pipe Size(s)	Box Qty
EZ-1	12" to 21"	Various	25
EZ-2	23" to 40"	Various	25



HOLDRITE STOUT BRACKET® – #SB1-2502. #SB2-2502

- Multi-purpose galvanized steel bracket, (2) two HOLDRITE® #250 clamps, 4 screws
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports Copper, PEX, CPVC, and many other
- Numerous clamps and fittings integrate into multiple sides of the Stout Bracket for superior strength and versatility





HOLDRITE STOUT BRACKET® – #SB1S. #SB2S


- Multi-purpose galvanized bracket supports various application solutions
- Ideal for lavatory, shower, toilet, vertical, horizontal and much more
- Telescoping design supports Copper, PEX, CPVC, and other types of piping
- Numerous acoustically-rated components integrate into multiple sides of the Stout Bracket for superior strength and versatility
- Includes four screws

9	Model#	Bracket Size	For Pipe Size(s)	Box Qty
	SB1S	10" to 18"	Various	50
	SB2S	13" to 25"	Various	50

HOLDRITE 800.321.0316 • Fax 760.744.0507 www.holdrite.com

HOLDRITE® Inserts and Clamps

SUPPORT AND ALIGNMENT SOLUTIONS

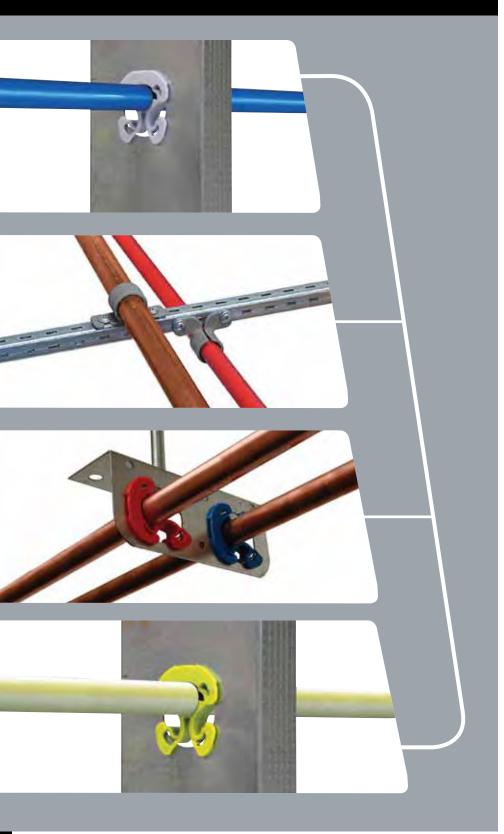

Ideal for Copper, PEX and CPVC Tubing



Flame Rated: Meets UL 94 V-2



Flame Rated: Meets UL 94 V-0 & ASTM E84 25/50



Standard Non-Flame Rated Inserts and Clamps



HOLDRITE® ISOLATORS - #104 - #106

• Ideal for Copper, PEX, and CPVC tubing in stub-out locations with #103 series, #121 series, #700 series and #110-R brackets

Inserts and Clamps

- Compatible with #121 series brackets for other applications
- Tubing size up to 1"


?	Model#	Hole Needed For Pipe Size(s)		Box Qty
	104	1-3/8" Diameter	1/2" CTS	100
	105	1-3/8" Diameter	3/4" CTS	100
	106	1-3/8" Diameter	1" CTS	100



-HOLDRITE® SUSPENSION CLAMPS - #221 - #226

- · Ideal for Copper, PEX, and CPVC tubing
- Mounts directly on HOLDRITE STOUT BRACKET or other surfaces
- Tubing size up to 2"


Model#	Clamp Size	For Pipe Size(s)	Box Qty
221	1-7/8" X 1-1/2"	1/2" CTS	100
222	1-7/8" X 1-3/4"	3/4" CTS	100
223	2-3/8" X 2-1/8"	1" CTS	50
224	2-7/8" X 2-3/8"	1-1/4" CTS	25
225	2-7/8" X 2-3/4"	1-1/2" CTS	25
226	3-3/8" X 3-1/8"	2" CTS	25



-HOLDRITE[®] 2-HOLE STANDARD CLAMPS -#231 - #236

- Ideal for Copper, PEX, and CPVC tubing
- Mounts directly on HOLDRITE STOUT BRACKET or other flat surfaces

Model#	Clamp Size	For Pipe Size(s)	Box Qty
231	2" X 7/8"	1/2" CTS	100
232	2-3/8" X 2-1/8"	3/4" CTS	100
233	2-3/4" X 2-1/2"	1" CTS	50
234	2-3/4" X 1-3/4"	1-1/4" CTS	25
235	3-1/8" X 2"	1-1/2" CTS	25
236	3-1/2" X 2-1/2"	2" CTS	25



-HOLDRITE® ISOLATORS - #424 - #426

- Ideal for metal thru-stud applications and integrates with HOLDRITE #121 series, #125 series and #700 series brackets
- · Positioning and dissimilar metal isolation for Copper, CPVC, and PEX tubing
- Meets UL 94 HB requirements
- "-C" versions for gluing to CPVC tubing

Model#	Hole Size	Pipe Size	Bag Qty	Master Carton Qty
424	1-11/32" & 1-3/8"	1/2" CTS	50	250
425	1-11/32" & 1-3/8"	3/4" CTS	50	250
426	1-11/32" & 1-3/8"	1" CTS	50	250

Inserts and Clamps

Flame-Rated Isolators Meets UL 94 V-2







- Hot lines

-HOLDRITE® ISOLATORS -#424-RB - #426-RB, #424-RR - #426-RR

- Ideal for metal thru-stud applications and integrates with HOLDRITE #121 and #125 series brackets
- Positioning and dissimilar metal isolation for Copper, CPVC, and PEX tubing
- Meets UL 94 V-2 requirements
- Off-center hole design allows for cross-over without fittings

Model#	Hole Needed	Pipe Size	Bag Qty	Master Carton Qty
424-RB	1-11/32" & 1-3/8"	1/2" CTS	50	250
425-RB	1-11/32" & 1-3/8"	3/4" CTS	50	250
426-RB	1-11/32" & 1-3/8"	1" CTS	50	250
424-RR	1-11/32" & 1-3/8"	1/2" CTS	50	250
425-RR	1-11/32" & 1-3/8"	3/4" CTS	50	250
426-RR	1-11/32" & 1-3/8"	1" CTS	50	250




HOLDRITE® ISOLATORS – #404-R - #406-R

- Ideal for metal studs with Copper, PEX, and CPVC tubing
- Meets UL 94 V-2 requirements
- Compatible with #103, #121, #125, #700 and #110-R series brackets
- Tubing size up to 1" (fits into 1-3/8" or 1-11/32" holes)

7	Model# Hole Needed		For Pipe Size(s)	Box Qty
	404-R	1-3/8" Diameter	1/2" CTS	100
	405-R	1-3/8" Diameter	3/4" CTS	100
	406-R	1-3/8" Diameter	1" CTS	100

Plenum, Smoke & Flame-Rated Isolators & Clamps Meets ASTM E84 25/50 and UL 94 V-0 requirements


FLAME FIGHTER™



— HOLDRITE[®] ISOLATORS – #424-S - #426-S

- Ideal for metal thru-stud applications
- Integrates with HOLDRITE #121 and #125 series brackets
- Positioning and dissimilar metal isolation for Copper, CPVC, and PEX tubing
- Meets ASTM E84 25/50 and UL 94 V-0 requirements (Plenum-rated)


7	Model#	Hole Size	Pipe Size	Bag Qty	Master Carton Qty
	424-S	1-11/32" & 1-3/8"	1/2" CTS	25	250
	425-S	1-11/32" & 1-3/8"	3/4" CTS	25	250
	426-S	1-11/32" & 1-3/8"	1" CTS	25	250



HOLDRITE® SUSPENSION CLAMPS – #221-S - #222-S

- Ideal for CPVC, Copper, and PEX tubing
- Meets ASTM E84 25/50 and UL 94 V-0 requirements (Plenum-rated)


Model#	Clamp Size	For Pipe Size(s)	Bag Qty
221-S	1-7/8" X 1-1/2"	1/2" CTS	100
222-S	1-7/8" X 1-3/4"	3/4" CTS	100



HOLDRITE® 2-HOLE STANDARD CLAMPS – #231-S - #232-S

- Ideal for CPVC, Copper, and PEX tubing
- Meets ASTM E84 25/50 and UL 94 V-0 requirements (Plenum-rated)

Model#	Clamp Size	For Pipe Size(s)	Bag Qty
231-S	2" X 7/8"	1/2" CTS	100
232-S	2-3/8" X 2-1/8"	3/4" CTS	100



HOLDRITE® VARIABLE CLAMPS - #250-S. #280-S

- Ideal for securing tubing to EZ-Strut trapeze/Stout platform
- Meets ASTM E84 25/50 and UL 94 V-0 requirements (Plenum-rated)
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds


!	Model#	Size	For Pipe Size(s)	Box Qty
	250-S	2-3/8" X 2-5/8"	3/8" to 1" CTS	50
	280-S	4-3/8" X 5-1/8"	1" to 2" CTS/IPS	50



HOLDRITE® VARIABLE CLAMPS – #255-S, #285-S

- Compatible with Copper, PEX, CPVC, iron pipe and other system materials
- Flat base, mounts directly to wood, metal, or other flat surfaces
- Meets ASTM E84 25/50 and UL 94 V-0 requirements (Plenum-rated)
- Variable closure clamp supports up to 2" pipe sizes, with load ratings up to 300 lbs.

Model#	Clamp Size	For Pipe Size(s)	Box Qty
255-S	2-7/8" X 2"	3/8" - 1" CTS	50
285-S	4-3/8" X 4"	1" - 2" CTS/IPS	50



HOLDRITE® VARIABLE STRUT CLAMPS – #257-S, 287-S


- Ideal for securing Copper, PEX, CPVC, and other piping directly to strut/channel
- No tools required and eliminates need for over 20 strut clamp SKUs
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds
- Meets ASTM E84 25/50 and UL 94 V-0 requirements (Plenum-rated)

7	Model#	Size	For Pipe Size(s)	Box Qty
	257-S	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
	287-S	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50

2 #0LDRITE 800.321.0316 • Fax 760.744.0507 www.holdrite.com #0LDRITE

HOLDRITE® Overhead Supports

SUPPORT AND ALIGNMENT SOLUTIONS

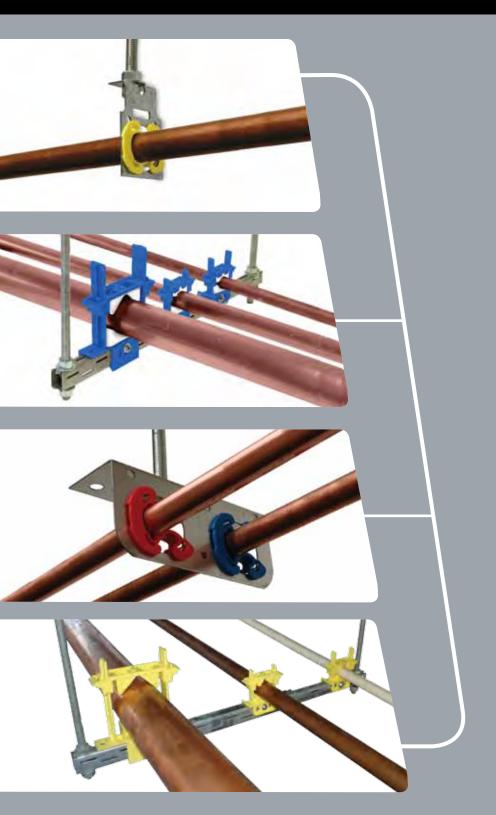

Overhead Pipe Support for Copper, PEX, CPVC and Others

Available for High and Tight Runs, Single and Multiple Runs

Versatility with Cast-In-Place Concrete Slabs, All-Thread Rod and Surface Mounting


FLAME RATED

UL 94 V-2

PLENUM, SMOKE & FLAME RATED

ASTM E84 25/50 UL 94 V-0

ISO-3822 Lab Tested



☐ HOLDRITE EZ-STRUT™ – #EZ-1, #EZ-2

- Ideal for multiple pipe run applications including Gas, Copper, CPVC, PEX and other piping
- Galvanized steel trapeze platform with telescoping design
- Works best with HOLDRITE #250 and #280 Clamps
- Attaches to standard all-thread rod with load rating up to 1,000 pounds
- Includes four screws

Model#	Size	For Pipe Size(s)	Box Qty
EZ-1	12" to 21"	Various	25
EZ-2	23" to 40"	Various	25



HOLDRITE® VARIABLE CLAMPS - #250, #280

- Ideal for securing tubing to EZ-Strut trapeze platform
- Sound-rated/isolation variable closure clamps
- Fire retardant framework meets requirements of UL 94 V-2 rating
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds

Model#	Size	For Pipe Size(s)	Box Qty
250	2-3/8" X 2-5/8"	3/8" to 1" CTS	50
280	4-3/8" X 5-1/8"	1" to 2" CTS/IPS	50



HOLDRITE® VARIABLE CLAMPS – #250-S, #280-S

- Ideal for securing tubing to EZ-Strut trapeze platform
- Meets requirements of UL 94 V-0 and ASTM E84 25/50 ratings
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds


,	Model#	Size	For Pipe Size(s)	Box Qty
	250-S	2-3/8" X 2-5/8"	3/8" to 1" CTS	50
	280-S	4-3/8" X 5-1/8"	1" to 2" CTS/IPS	50



HOLDRITE® VARIABLE STRUT CLAMP – #257, #287, #257-P. #287-P

- Ideal for securing Copper, PEX, CPVC, and other piping directly to strut/channel
- #257-P, #287-P include sound-rated/isolation pads to reduce noise & vibration
- No tools required and eliminates need for over 20 strut clamp SKUs
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds
- Fire retardant framework meets requirements of UL 94 V-2 rating

Model#	Size	For Pipe Size(s)	Box Qty
257	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
257-P	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
287	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50
287-P	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50




- HOLDRITE® VARIABLE STRUT CLAMP – #257-S. #287-S


- Ideal for securing Copper, PEX, CPVC, and other piping directly to strut/channel
- No tools required and eliminates need for over 20 strut clamp SKUs
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds
- Provides dissimilar metal isolation
- Meets requirements of UL 94 V-0 and ASTM E84 25/50 ratings

Model#	Size	For Pipe Size(s)	Box Qty
257-S	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
287-S	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50

Overhead Solutions Overhead Solutions









HOLDRITE® - #121-R, #121-W, #121-RLS

- Ideal for single pipe run applications including Copper, CPVC, and PEX
- #121-R provides 1-1/4" centerline distance from structure
- #121-W provides a 2" centerline distance from structure
- #121-RLS provides 3" centerline distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

3	Model#	Size	For Pipe Size(s)	Box Qty
	121-R	2" X 1-3/4" X 1-1/2"	1/2", 3/4", 1" CTS	25
	121-W	3" X 1-3/4" X 3/4"	1/2", 3/4", 1" CTS	25
	121-RLS	4-1/2" x 2-5/8" x 1"	1/2", 3/4", 1" CTS	50








HOLDRITE® - #121-D, #121-DS, #121-DLS


- Ideal for dual pipe run applications including Copper, CPVC, and PEX
- #121-D provides 2" centerline distance from structure
- #121-DS provides 1-1/4" centerline distance from structure
- #121-DLS provides 3" centerline distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts

9	Model#	Size	For Pipe Size(s)	Box Qty
	121-D	5" X 3" X 1"	1/2", 3/4", 1" CTS	25
	121-DS	5" x 2-1/4" x 1-3/4"	1/2", 3/4", 1" CTS	25
	121-DLS	5" x 4-1/2" x 1"	1/2", 3/4", 1" CTS	25



- HOLDRITE® - #121-L


- · Ideal for dual pipe run applications including Copper, CPVC, and PEX
- Provides 2" and 4" centerline distance from structure
- Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts






HOLDRITE® - #121-0

- Ideal for three pipe run applications including Copper, CPVC, and PEX (example: Hot, Cold and Recirc.)
- Provides 1-1/4", 2-3/8", 3-1/2" centerline distance from structure
- · Galvanized steel bracket attaches directly to flat surface or suspends from 3/8" all-thread rod, providing any desired height
- Bracket can be cast into concrete slab, then bent into position
- Compatible with HOLDRITE #400 series and #261/#262 inserts





HOLDRITE® HANGOVER – #125-D

- Cast-in-place concrete hanger bracket for horizontal support
- Galvanized steel bracket with 1-1/4", 2", 4" centerline distance from structure
- Meets MSS-SP-58 load requirements (150 lb. load rating)
- Compatible with HOLDRITE #400 series and #261/#262 inserts

Model#	Size	For Pipe Size(s)	Box Qty
125-D	9-5/8" x 5"	1/2", 3/4", 1" CTS	50



HOLDRITE[®] **SWIVEL LOOP HANGERS** – #300 - #310

- Ideal for dissimilar metal isolation and noise & vibration isolation
- Galvanized steel loop hanger with 3/8" swivel nut and rubber liner
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)

Madal#	For Pip	Pay Oty	
Model#	IPS Size	CTS Size	Box Qty
300	n/a	1/2"	100
301	1/2"	3/4"	100
302	3/4"	1"	100
303	1"	1-1/4"	100
304	1-1/4" - 1-1/2"	1-1/2"	100
306	2"	2"	100
307	2-1/2"	2-1/2"	50
308	3"	3"	50
310	4"	4"	25



www.holdrite.com

HOLDRITE[®] **J-HANGERS** – #320 - #330

- Ideal for dissimilar metal isolation and noise & vibration isolation
- Galvanized steel J-hanger with rubber liner
- Conforms with Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 5)


Model#	For Pip	oe Size(s)	Box Qty
wodei#	IPS Size	CTS Size	
320	n/a	1/2"	50
321	1/2"	3/4"	50
322	3/4"	1"	50
323	1"	1-1/4"	50
324	1-1/4"	1-1/2"	50
325	1-1/2"	2"	50
326	2"	2-1/2"	50
327	2-1/2"	3"	25
328	3"	n/a	25
330	4"	4"	25

Overhead Solutions Overhead Solutions



HOLDRITE® CLEVIS HANGER

- Mounts directly to suspended hanger rod
- Meets the 25/50 flame spread/smoke developed index
- Ideal for overhead insulated pipe



MODEL#	Wall Installation	Pipe O.D.	Overall Dimension					Box Qty
	а	b	С	d		f	g	
HR 704062	1/2"	5/8"	1.75	2-3/4	3-3/8	4-3/8	7/8	10
HR 704087	1/2"	7/8"	2.00	2-3/4	3-1/2	4-3/8	7/8	10
HR 704112	1/2"	1-1/8"	2.25	3-3/16	3-13/16	5	15/16	10
HR 704137	1/2"	1-3/8"	2.50	3-1/2	4	5-1/2	1-1/16	10
HR 704162	1/2"	1-5/8"	2.75	3-3/4	4-3/8	5-7/8	1-1/4	10
HR 704212	1/2"	2-1/8"	3.25	4-1/2	5-1/8	6-7/8	1-7/16	10
HR 704262	1/2"	2-5/8"	3.75	5	5-5/8	7-5/8	1-11/16	10
HR 704312	1/2"	3-1/8"	4.25	5-13/16	6-7/16	8-3/4	2-1/8	5
HR 704412	1/2"	4-1/8"	5.25	6-7/8	7-1/2	10-1/8	2-9/16	5
HR 708062	1"	5/8"	2.75	3-3/4	4-3/8	5-7/8	1-1/4	10
HR 708087	1"	7/8"	3.00	4-3/16	4-3/4	6-1/2	1-5/16	10
HR 708112	1"	1-1/8"	3.75	4-1/2	5-1/8	6-7/8	1-7/16	10
HR 708137	1"	1-3/8"	3.50	4-3/4	5-3/8	7-1/4	1-9/16	10
HR 708162	1"	1-5/8"	3.75	5	5-5/8	7-5/8	1-11/16	10
HR 708212	1"	2-1/8	4.25	5-13/16	6-7/16	8-3/4	2-1/8	5
HR 708262	1"	2-5/8"	4.75	6-5/16	6-7/8	9-3/8	2-5/16	5
HR 708312	1"	3-1/8"	5.25	6-7/8	7-1/2	10-1/8	2-9/16	5

ENGINEERED SOLUTION









MODEL#	Wall Installation	Pipe O.D.	Overall Dimension	Box Qty
	а	b	C	
HR 724062	1/2"	5/8"	1.75	20
HR 724087	1/2"	7/8"	2.00	20
HR 724112	1/2"	1-1/8"	2.25	20
HR 724137	1/2"	1-3/8"	2.50	20
HR 724162	1/2"	1-5/8"	2.75	10
HR 724212	1/2"	2-1/8"	3.25	10
HR 724262	1/2"	2-5/8"	3.75	10
HR 724312	1/2"	3-1/8"	4.25	10
HR 724412	1/2"	4-1/8"	5.25	10
HR 726062	3/4"	5/8"	2.25	10
HR 726087	3/4"	7/8"	2.50	10
HR 726112	3/4"	1-1/8"	2.75	10
HR 726137	3/4"	1-3/8"	3.00	10
HR 726162	3/4"	1-5/8"	3.25	10
HR 726212	3/4"	2-1/8"	3.75	10
HR 726262	3/4"	2-5/8"	4.25	10
HR 726312	3/4"	3-1/8"	4.75	10
HR 726362	3/4"	3-5/8"	5.25	10
HR 726412	3/4"	4-1/8"	5.75	10
HR 728062	1"	5/8"	2.75	10
HR 728087	1"	7/8"	3.00	10
HR 728112	1"	1-1/8"	3.25	10
HR 728137	1"	1-3/8"	3.50	10
HR 728162	1"	1-5/8"	3.75	10
HR 728212	1"	2-1/8"	4.25	10
HR 728262	1"	2-5/8"	4.75	10
HR 728312	1"	3-1/8"	5.25	10
HR 728412	1"	4-1/8"	6.25	10

- HOLDRITE® STEEL STRUT CLAMP • Mounts directly to strut


- Meets the 25/50 flame spread/smoke developed index
- Ideal for insulated pipe on strut




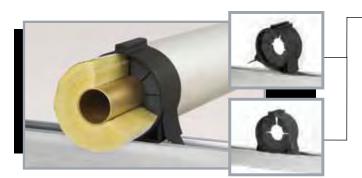


HOLDRITE® PLASTIC STRUT CLAMP

- Mounts directly to strut
- Meets UL 2043 for Plenum use
- Ideal for insulated pipe on strut

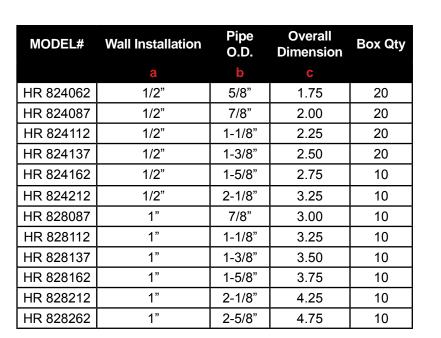

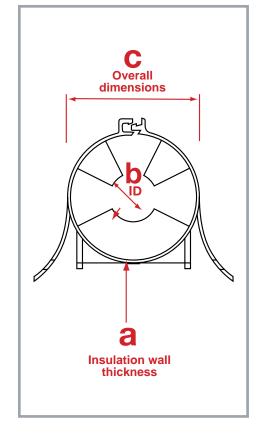

HOLDRITE® Strut Clamp Features

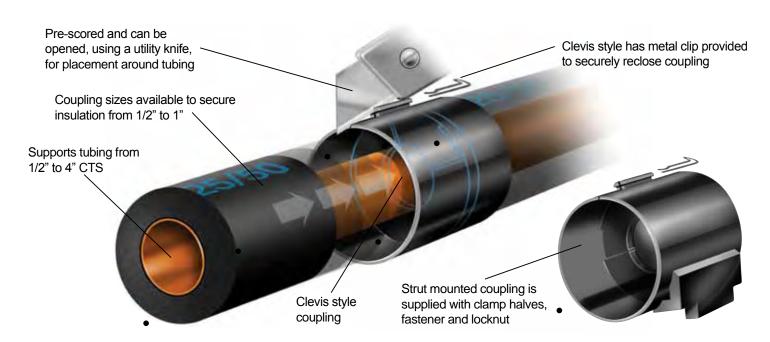

Quick Brands

WATER HEATER ACCESSORIES AND EQUIPMENT SUPPORT SOLUTIONS









MODEL		CITY OF L.A. APPROVED	
QUICK STRAP-50	✓	✓	✓
QUICK STRAP-50-D	\checkmark	\checkmark	\checkmark
QUICK BELT-50-F	\checkmark	\checkmark	\checkmark
QUICK STRAP-50-P	\checkmark	\checkmark	\checkmark
QUICK STRAP-120	\checkmark	\checkmark	\checkmark







Most Tested and Recognized Water Heater Bracing and Support Systems

Lab Tested

Meets Codes

Superior Engineered Design



QUICK FLEX™

- Stainless Steel Water Heater Flex Connector
- High flexibility
- 125 PSI Continuous / 200 PSI Max
- 190°F temperature rated
- IAPMO Listed and meets ASME A112.18.6
- Large ID for high flow rate
- Extremely resistant to kinking
- · Complies with California Lead Law
- Also for use with other water supplied equipment

MODEL#	DESCRIPTION	BOX QTY
QFC-7515	3/4" FIP x 3/4" FIP x 15" Stainless Steel Water Heater Connector	35
QFC-7518	3/4" FIP x 3/4" FIP x 18" Stainless Steel Water Heater Connector	35
QFC-7524	3/4" FIP x 3/4" FIP x 24" Stainless Steel Water Heater Connector	35
QFC-17518	1" FIP x 3/4" FIP x 18 Stainless Steel Water Heater Connector	30
QFC-17524	1" FIP x 3/4" FIP x 24 Stainless Steel Water Heater Connector	30
QFC-0118	1" FIP x 1" FIP x 18" Stainless Steel Water Heater Connector	25
QFC-0124	1" FIP x 1" FIP x 24" Stainless Steel Water Heater Connector	25
QFC-11418	1-1/4" FIP x 1-1/4" FIP x 18" Stainless Steel Water Heater Connector	12
QFC-11218	1-1/2" FIP x 1-1/2" FIP x 18" Stainless Steel Water Heater Connector	10
QFC-0218	2" FIP x 2" FIP x 18" Stainless Steel Water Heater Connector	9



QUICK PAN™

- Meets Code Requirements
- · Rolled edges for added strength and safety
- Aluminum pan with 1" PVC or CPVC drain fitting (Add "-C" to model number for the 1" CPVC drain fitting)
- Use with gas or electric water heaters
- Now available with a compact dual-use 1" Bulkhead Fitting, allowing use of 3/4" or 1" drain piping

MODEL#	DESCRIPTION		
QP-20	20" Aluminum Water Heater Pan with drain fitting	6	
QP-22	22" Aluminum Water Heater Pan with drain fitting	6	
QP-24	24" Aluminum Water Heater Pan with drain fitting	6	
QP-26	26" Aluminum Water Heater Pan with drain fitting	6	
QP-28	28" Aluminum Water Heater Pan with drain fitting	6	
QP-30	30" Aluminum Water Heater Pan with drain fitting	6	

"-C" models include CPVC drain body, rather than PVC



- · Superior engineered design
- Meets code requirements
- Galvanized steel construction
- Protects outside water heater from weather and tampering
- Provides neat and orderly appearance
- Move your water heater outside to increase indoor storage space
- Easy assembly with basic tools
- Screws provide secure installation
- Superior front panel design provides access door for service and combustion air
- Air space crush zone packaging protects corners and transfers weight evenly across product during transportation

MODEL#	DESCRIPTION	BOX QTY
QS-E24	24" Shed Enclosure (24" x 74" x 24")	1
QS-E26	26" Shed Enclosure (26" x 74" x 26")	1
QS-E30	30" Shed Enclosure (30" x 74" x 30")	1

These **engineered platforms** are strong, safe, easy to install, water-tight and eliminate the need to buy a separate drain pan



_QUICK STAND™ - #40-SWHP, #50-SWHP

- CEILING MOUNT
- Cross Braces for seismic requirements
- 1" PVC drain fitting (MIP/Socket)
- #40-SWHP supports up to 20 gallon water heaters or 375 lbs.
- •#50-SWHP supports up to 50 gallon water heaters or 600 lbs.

Model#	Drain Pan Size	Box Qty	Pallet Qty
40-SWHP	21-1/4" x 21-1/4"	1	10
50-SWHP	26-1/2" x 26-1/2"	1	10



-QUICK STAND™ – #40-SWHP-A, #50-SWHP-A

- CEILING MOUNT
- No Cross Braces
- 1" PVC drain fitting (MIP/Socket)
- #40-SWHP-A supports up to 20 gallon water heaters or 375 lbs.
- #50-SWHP-A support up to 50 gallon water heaters or 600 lbs.

Model#	Drain Pan Size	Box Qty	Pallet Qty
40-SWHP-A	21-1/4" x 21-1/4"	1	10
50-SWHP-A	26-1/2" x 26-1/2"	1	10



-QUICK STAND™ – #30-SWHP-M, #40-SWHP-M, #50-SWHP-M

- CEILING MOUNT
- No Cross Braces
- 1" Welded Galvanized Steel drain fitting (#30-SWHP-M has a 1-1/4" drain fitting)
- #30-SWHP-M supports up to 20 gallon water heaters or 300 lbs.
- #40-SWHP-M supports up to 20 gallon water heaters or 375 lbs.
- •#50-SWHP-M support up to 50 gallon water heaters or 600 lbs.

Model#	Drain Pan Size	Box Qty	Pallet Qty
30-SWHP-M	24" x 24" x 4"	1	10
40-SWHP-M	21-1/4" x 21-1/4" x 2-1/2"	1	10
50-SWHP-M	26-1/2" x 26-1/2" x 2-1/2"	1	10



QUICK STAND™ – #40-SWHP-W. #50-SWHP-W

- WALL MOUNT
- 1" PVC drain fitting (MIP/Socket)
- #40-SWHP-W supports up to 20 gallon water heaters or 375 lbs.
- #50-SWHP-W support up to 50 gallon water heaters or 600 lbs.
- Includes 6 brackets, 2 support arms and connection hardware

Model#	Drain Pan Size	Box Qty	Pallet Qty
40-SWHP-W	21-1/4" x 21-1/4"	1	10
50-SWHP-W	26-1/2" x 26-1/2"	1	10



-QUICK STAND™ – #40-SWHP-WM, #50-SWHP-WM

- WALL MOUNT
- 1" Welded Galvanized Steel drain fitting
- #40-SWHP-WM supports up to 20 gallon water heaters or 375 lbs.
- #50-SWHP-WM supports up to 50 gallon water heaters or 600 lbs.

Model#	Drain Pan Size	Box Qty	Pallet Qty
40-SWHP-WM	21-1/4" x 21-1/4"	1	10
50-SWHP-WM	26-1/2" x 26-1/2"	1	10



QUICK STANDTM – #40-S-22-U, #40-S-22-A, #40-S-24-U, #40-S-24-A, #40-S-30-U • Water heater stand, both assembled and unassembled

- Galvanized steel construction
- "-U" models are unassembled, "-A" models are pre-assembled

Model#	Size	Box Qty	Pallet Qty
40-S-22-U	Up to 52 gal. / 650 lbs.	1	24
40-S-22-A	Up to 52 gal. / 650 lbs.	1	24
40-S-24-U	Up to 100 gal. / 1,200 lbs.	1	18
40-S-24-A	Up to 100 gal. / 1,200 lbs.	1	18
40-S-30-U	Up to 100 gals / 1,200 lbs.	1	12



-QUICK STRAP® DELUXE – #QS-50-D

- The most tested and recognized water heater restraint
- Powder-coated steel water heater strap kit with (2) safety caps
- Supports up to 80 gallon water heaters
- Customized label available with your company name
- · Includes self-drilling wall anchor hardware

Model#	Size	Box Qty	Pallet Qty
QS-50-D	Up to 80 gal.	15	120



QUICK STRAP® - #QS-50, #QS-50-S,

- #QS-50-P. #QS-120
- The most tested and recognized water heater restraint
- Galvanized water heater strap kit in box
- Supports up to 120 gallon water heaters
- #QS-50-S includes 1" wall spacer
- Includes self-drilling wall anchor hardware


		J		
2	Model#	Size	Qty	Pallet Qty
	QS-50	Up to 80 gal.	15/Box	120
	QS-50-S	Up to 80 gal.	15/Box	120
	QS-50-P	Up to 80 gal.	15/Bag	180
	QS-120	Up to 120 gal.	12/Box	60



QUICK STRAP® – #QS-5, #QS-12

- Thermal expansion tank mounting bracket
- · Secures to wall and takes weight load off pipes
- · Galvanized and stainless steel construction
- · Available for 2-5 gallon units
- · Includes bracket, support straps, and mounting screws

Model#	Size	Box Qty	Pallet Qty
QS-5	Up to 2.5 gal; Up to 9" diameter	15	120
QS-12	2.5 to 5 gal; 9.5" to 13" diameter	15	120




QUICK BELT® - #QB-50-F

- The most tested and recognized water heater restraint
- Soft-belt style water heater strap kit
- #QB-50-F supports up to 80 gallon water heaters
- Includes self-drilling wall anchor hardware

)	Model#	Size	Box Qty	Pallet Qty
	QB-50-F	Up to 80 gal.	20	120

HOLDRITE[®] **HydroFlame**[™]

The Ultimate Cast-in-Place Water, **Smoke and Fire Stop Solution**

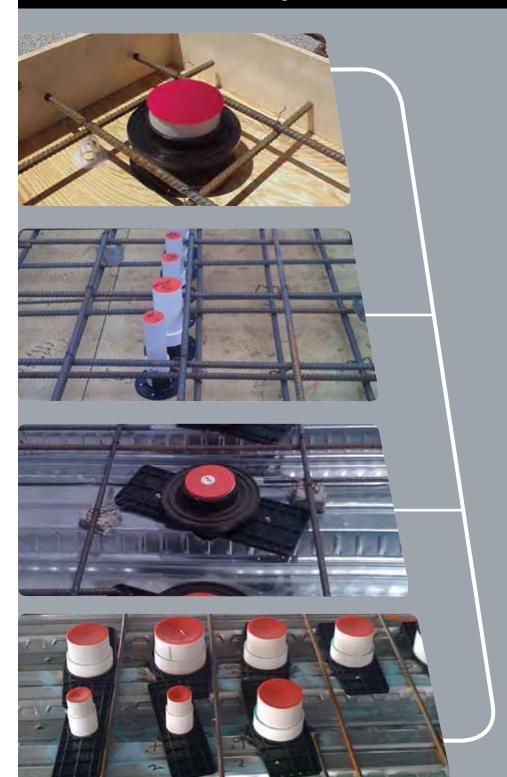



Provides Superior Waterproofing and Firestopping Capabilities

Meets and Exceeds Building Code Requirements

Achieves UL Ratings

Easy Installation








Safeguard property from water damage and mold

Protect life against the dangers of fire, gas and smoke spread



Natural disasters, such as hurricanes and other storms, may cause schedule delays and water damage to buildings under construction. Excessive rain often causes costly water damage to ceilings, walls and floors, if water is allowed to leak through floors during construction.

Water damage may cause significant health concerns and spawn lawsuits regarding mold issues. Failure of water lines, leaking water heaters, overflowing dishwashers, toilets and sinks, or misuse of other appliances may result in unwanted water intrusion that results in significant insurance claims in occupied buildings. More property claims are paid out due to water damage than fire damage.





Most buildings are designed to house data communication networks and computer equipment. Such hi-tech investments are critical to corporations, healthcare facilities, military installations, government infrastructure and universities.

HOLDRITE® HydroFlame™ protects these high value assets from unwanted destruction due to water, as well as fire and smoke.

A comprehensive collection of Product Data for all HOLDRITE® HydroFlame™ products is available in the **HOLDRITE**® **HydroFlame™ Product Catalog**. Visit our website for more information.



cast-in-place water, smoke and fire stop system. HydroFlame's internal and external water seals offer double protection against unwanted water intrusion. Its patented mid-body seal allows for contraction and expansion of piping systems and the surrounding concrete floor slab while still protecting against the spread of water, fire, smoke and gas.



Commonly observed field devised methods may result in providing a dangerous pathway for water, smoke, gas or fire.

Damage from this hotel fire was contained to the upper floors, but water damage destroyed walls, ceilings, floors, furniture, rugs, artwork, restaurants and stores all the way down to the lower floors.



Product configuration (flat form deck sleeve)











HOLDRITE® HydroFlame™ – Flat Form Deck Sleeve

- Mid-body seal provides watertight penetration
 - UL Classified firestop device (2 or 3-hour F-ratings)
- Built-in water, fire, smoke and gas protection
- Custom cut to your specified height at no extra cost
- Turn-key installation no job site modifications required
- Reduced time to dry floors and finish building during construction
- Includes OSHA compliant safety cap/hole cover
- Allows for expansion, contraction and movement
- Available 4½" and taller for ½"-6" piping
- Reduces piping system noise transfer by maintaining annular spacing

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
PS-NP-0050	PVC, ccPVC, RNC & ABS	.840"	1/2"
PS-NP-0075	PVC, ccPVC, RNC & ABS	1.050"	3/4"
PS-NP-0100	PVC, ccPVC, RNC & ABS	1.315"	1"
PS-NP-0125	PVC, ccPVC, RNC & ABS	1.660"	1-1/4"
PS-NP-0123 PS-NP-0150	PVC, ccPVC, RNC & ABS	1.900"	1-1/2"
		+	2"
PS-NP-0200	PVC, ccPVC, RNC & ABS	2.375"	
PS-NP-0250	PVC, ccPVC, RNC & ABS	2.875"	2-1/2"
PS-NP-0300	PVC, ccPVC, RNC & ABS	3.50"	3"
PS-NP-0400	PVC, ccPVC, RNC & ABS	4.5"	4"
PS-NP-0600	PVC, ccPVC, RNC & ABS	6.625"	6"
PS-CP-0050	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	.625"	1/2"
PS-CP-0075	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	0.875"	3/4"
PS-CP-0100	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.125"	1"
PS-CP-0125	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.375"	1-1/4"
PS-CP-0150	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.625"	1-1/2"
PS-CP-0200	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	2.125"	2"
PS-CN-0050	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	.840"	1/2"
PS-CN-0075	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.050"	3/4"
PS-CN-0100	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.315"	1"
PS-CN-0125	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.660"	1-1/4"
PS-CN-0150	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.900"	1-1/2"
PS-CN-0200	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	2.375"	2"
PS-CN-0250	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	2.875"	2-1/2"
PS-CN-0300	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	3.50"	3"
PS-CN-0400	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	4.5"	4"
PS-CN-0600	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	6.625"	6"
PS-CT-0050	Copper	.625"	1/2"
PS-CT-0075	Copper	0.875"	3/4"
PS-CT-0100	Copper	1.125"	1"
PS-CT-0125	Copper	1.375"	1-1/4"
PS-CT-0150	Copper	1.625"	1-1/2"
PS-CT-0200	Copper	2.125"	2"
PS-CT-0250	Copper	2.625"	2-1/2"
PS-CT-0300	Copper	3.125"	3"
PS-CT-0400	Copper	4.125"	4"
PS-CT-0600	Copper	6.125"	6"
PS-CH-0200	Cast Iron - Extra Heavy	2.38"	2"
	,		<u>l</u>

HOLDRITE[®] HydroFlame[™] – Flat Form Deck Sleeve continued

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
PS-CH-0300	Cast Iron - Extra Heavy	3.50"	3"
PS-CH-0400	Cast Iron - Extra Heavy	4.50"	4"
PS-CI-0150	Cast Iron - Service Weight	1.90"	1-1/2"
PS-CI-0200	Cast Iron - Service Weight	2.30"	2"
PS-CI-0300	Cast Iron - Service Weight	3.30"	3"
PS-CI-0400	Cast Iron - Service Weight	4.30"	4"
PS-CI-0600	Cast Iron - Service Weight	6.30"	6"
PS-CX-0150	Cast Iron - Hubless	1.90"	1-1/2"
PS-CX-0200	Cast Iron - Hubless	2.35"	2"
PS-CX-0300	Cast Iron - Hubless	3.35"	3"
PS-CX-0400	Cast Iron - Hubless	4.38"	4"
PS-CX-0500	Cast Iron - Hubless	5.30"	5"
PS-CX-0600	Cast Iron - Hubless	6.30"	6"
PS-ST-0050	Steel	.840"	1/2"
PS-ST-0075	Steel	1.050"	3/4"
PS-ST-0100	Steel	1.315"	1"
PS-ST-0125	Steel	1.660"	1-1/4"
PS-ST-0150	Steel	1.900"	1-1/2"
PS-ST-0200	Steel	2.375"	2"
PS-ST-0250	Steel	2.875"	2-1/2"
PS-ST-0300	Steel	3.50"	3"
PS-ST-0400	Steel	4.5"	4"
PS-ST-0600	Steel	6.625"	6"
PS-ET-0050	EMT	0.706"	1/2"
PS-ET-0075	EMT	0.922"	3/4"
PS-ET-0100	EMT	1.163"	1"
PS-ET-0125	EMT	1.51"	1-1/4"
PS-ET-0150	EMT	1.74"	1-1/2"
PS-ET-0200	EMT	2.197"	2"
PS-ET-0250	EMT	2.875"	2-1/2"
PS-ET-0300	EMT	3.5"	3"
PS-ET-0400	EMT	4.5"	4"

Suffix "-W" added to the model number provides for a water dam

HOLDRITE[®] HydroFlame[™] products are **Made in the USA** and meet the **Buy American Act**. These iconic solutions are ideal for government and military projects.





HOLDRITE® HydroFlame™ – Corrugated Metal Form Deck Sleeve

- Mid-body seal provides watertight penetration
- UL Classified firestop device
- One-piece construction No parts, pieces or field modifications necessary
- Built-in water, fire, smoke and gas protection
- Custom cut to your specified height at no extra cost
- Reduced time to dry floors and finish building
- Includes OSHA compliant safety cap/hole cover
- Allows for expansion, contraction and movement
- Available 2½" and taller for ½"-6" piping

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
CD-NP-0050	PVC, ccPVC, RNC & ABS	.840"	1/2″
CD-NP-0075	PVC, ccPVC, RNC & ABS	1.050"	3/4"
CD-NP-0100	PVC, ccPVC, RNC & ABS	1.315"	1"
CD-NP-0125	PVC, ccPVC, RNC & ABS	1.660″	1-1/4"
CD-NP-0150	PVC, ccPVC, RNC & ABS	1.900"	1-1/2"
CD-NP-0200	PVC, ccPVC, RNC & ABS	2.375"	2"
CD-NP-0250	PVC, ccPVC, RNC & ABS	2.875"	2-1/2"
CD-NP-0300	PVC, ccPVC, RNC & ABS	3.50"	3"
CD-NP-0400	PVC, ccPVC, RNC & ABS	4.5"	4"
CD-NP-0600	PVC, ccPVC, RNC & ABS	6.625"	6"
CD-CP-0050	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	.625"	1/2″
CD-CP-0075	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	0.875"	3/4"
CD-CP-0100	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.125"	1"
CD-CP-0125	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.375"	1-1/4"
CD-CP-0150	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.625"	1-1/2"
CD-CP-0200	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	2.125"	2"
CD-CN-0050	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	.840"	1/2″
CD-CN-0075	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.050"	3/4"
CD-CN-0100	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.315"	1"
CD-CN-0125	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.660″	1-1/4"
CD-CN-0150	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.900"	1-1/2"
CD-CN-0200	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	2.375"	2"
CD-CN-0250	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	2.875"	2-1/2"
CD-CN-0300	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	3.50"	3"
CD-CN-0400	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	4.5"	4"
CD-CN-0600	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	6.625"	6"
CD-CT-0050	Copper	.625"	1/2″
CD-CT-0075	Copper	0.875"	3/4"
CD-CT-0100	Copper	1.125"	1"
CD-CT-0125	Copper	1.375″	1-1/4″
CD-CT-0150	Copper	1.625"	1-1/2"
CD-CT-0200	Copper	2.125"	2"
CD-CT-0250	Copper	2.625"	2-1/2"
CD-CT-0300	Copper	3.125"	3"
CD-CT-0400	Copper	4.125"	4"
CD-CT-0600	Copper	6.125"	6"
CD-CH-0200	Cast Iron - Extra Heavy	2.38"	2"

HOLDRITE® HydroFlame™ – Corrugated Metal Form Deck Sleeve continued

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
CD-CH-0300	Cast Iron - Extra Heavy	3.50"	3″
CD-CH-0400	Cast Iron - Extra Heavy	4.50"	4"
CD-CI-0150	Cast Iron - Service Weight	1.90″	1-1/2"
CD-CI-0200	Cast Iron - Service Weight	2.30"	2"
CD-CI-0300	Cast Iron - Service Weight	3.30"	3″
CD-CI-0400	Cast Iron - Service Weight	4.30"	4"
CD-CI-0600	Cast Iron - Service Weight	6.30"	6"
CD-CX-0150	Cast Iron - Hubless	1.90"	1-1/2"
CD-CX-0200	Cast Iron - Hubless	2.35"	2"
CD-CX-0300	Cast Iron - Hubless	3.35"	3"
CD-CX-0400	Cast Iron - Hubless	4.38"	4"
CD-CX-0500	Cast Iron - Hubless	5.30"	5″
CD-CX-0600	Cast Iron - Hubless	6.30"	6"
CD-ST-0050	Steel	.840"	1/2"
CD-ST-0075	Steel	1.050"	3/4"
CD-ST-0100	Steel	1.315"	1″
CD-ST-0125	Steel	1.660"	1-1/4"
CD-ST-0150	Steel	1.900"	1-1/2"
CD-ST-0200	Steel	2.375"	2"
CD-ST-0250	Steel	2.875"	2-1/2"
CD-ST-0300	Steel	3.50"	3″
CD-ST-0400	Steel	4.5"	4"
CD-ST-0600	Steel	6.625"	6"
CD-ET-0050	EMT	0.706"	1/2"
CD-ET-0075	EMT	0.922"	3/4"
CD-ET-0100	EMT	1.163"	1″
CD-ET-0125	EMT	1.51"	1-1/4"
CD-ET-0150	EMT	1.74"	1-1/2"
CD-ET-0200	EMT	2.197"	2"
CD-ET-0250	EMT	2.875"	2-1/2"
CD-ET-0300	EMT	3.5"	3″
CD-ET-0400	EMT	4.5"	4"

Suffix "-W" added to the model number provides for a water dam

Check out the HOLDRITE® HydroFlame™ complete product catalog on our website at www.holdrite.com/media/catalog



water/i nestop



–HOLDRITE® HydroFlame™ – Tub Box

- Provides for a watertight slab penetration
- UL Classified firestop device
- Built-in water, fire, smoke and gas protection
- Strong and simple installation No need for fire caulking or mineral wool
- Device accepts PVC, ABS, iron and brass drain pipes using the appropriate seal plug provided
- Allows for expansion, contraction and movement
- Reduced time to dry floors and finish building during construction

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
TB-NP-0200	Sch.40 Bath Drains	N/A	1-1/2"
TB-TW-0200	Thin Wall & Brass Bath Drains	N/A	1-1/2"



-HOLDRITE® HydroFlame™ – Closet Flange Sleeve

- Mid-body seal provides watertight penetration
- UL Classified firestop device
- Strong and simple installation for 3" and 4" flanges
- Device accepts PVC, ABS or no-hub closet flanges
- Built-in water, fire, smoke and gas protection
- Reduced time to dry floors and finish building during construction

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
PS-NPCF-0300	PVC, ccPVC & ABS	3.5"	3″
PS-NPCF-0400	PVC, ccPVC & ABS	4.5"	4"
PS-CICF-0300	Cast Iron - Service Weight	3.30"	3″
PS-CICF-0400	Cast Iron - Service Weight	4.30"	4"
PS-CXCF-0300	Cast Iron - Hubless	3.35"	3"
PS-CXCF-0400	Cast Iron - Hubless	4.38"	4"



[−]HOLDRITE® HydroFlame[™] – Shower Drain Sleeve

- · UL Classified firestop device
- Built-in fire protection
- Provides a fast and strong drain support
- For use with 2" PVC Drains (Drain body not included)
- Reduced time to dry floors and finish building during construction

Model No.	Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
PS-SD-0200	PVC, ccPVC & ABS	2.375"	2″

Water/Firestop Sleeves



-HOLDRITE[®] HydroFlame[™] – Floor Drain Kit

- Mid-body seal provides watertight penetration
- UL Classified firestop device
- Simple and strong drain support stand during concrete pour
- Available for 2", 3", and 4" Neo-lock style cast iron drain bodies (Drain not included)
- Reduced time to dry floors and finish building during construction

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
HM-DK-0200	PVC, ccPVC, ABS & Cast Iron (Please specify when ordering)	N/A	2″
HM-DK-0300	PVC, ccPVC, ABS & Cast Iron (Please specify when ordering)	N/A	3″
HM-DK-0400	PVC, ccPVC, ABS & Cast Iron (Please specify when ordering)	N/A	4"



-HOLDRITE® HydroFlame™ -**Optional Pipe Size Sleeve**

- UL Classified firestop device
- Interior mid-body seal provides water resistant penetration
- Built-in fire protection
- Custom cut to your specified height at no extra cost
- Each sleeve accepts a range of sizes ½"-6" piping, ½"-1", 1¼"-2", 2½"-3". 4" or 5"-6"
- Includes OSHA compliant safety cap/hole cover
- Allows for movement and off-center piping
- Reduced time to dry floors and finish building

Model No.	Penetrating Pipe Type(s) Pi	pe O.D.	Nominal Pipe Size
OPS-PL-0100	1/2 to 1 Inch Plastic Pipes .6	25"-1.5"	1″
OPS-PL-0200	1-1/4 to 2 Inch Plastic Pipes 1.3	375"-2.5"	2"
OPS-PL-0300	2-1/2 to 3 Inch Plastic Pipes 2.6	525"-3.5"	3″
OPS-PL-0400	4 Inch Plastic Pipes 4.7	125"-4.5"	4"
OPS-PL-0600	5 to 6 Inch Plastic Pipes 5.1.	25"-6.625"	6"
OPS-MT-0100	1/2 to 1 Inch Metallic Pipes .6	25"-1.5"	1"
OPS-MT-0200	1-1/4 to 2 Inch Metallic Pipes 1.3	375"-2.5"	2"
OPS-MT-0300	2-1/2 to 3 Inch Metallic Pipes 2.6	525"-3.5"	3″
OPS-MT-0400	4 Inch Metallic Pipes 4.7	125"-4.5"	4"
OPS-MT-0600	5 to 6 Inch Metallic Pipes 5.1.	25"-6.625"	6"

Suffix "-W" added to the model number provides for a water dam



- HOLDRITE® HydroFlame™ -Cable and "Line Set" Sleeve

- UL Classified firestop device
- Device accepts multiple Data, Phone, Electrical, Fiber cables and refrigeration line sets
- Custom cut to your specified height at no extra cost
- Includes OSHA compliant safety cap/hole cover

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
PS-LS-0300	Line Sets	3.75"	3″
PS-CS-0200	Cable Sets	2.625"	2"
PS-CS-0300	Cable Sets	3.75"	3″

Water/Firestop Sleeves



-HOLDRITE® HydroFlame™ -Wood Deck Concrete Sleeve (Sleeve Only)

- Fast, simple concrete sleeve for flat form decks
- Custom cut to your specified height at no extra cost
- Includes OSHA compliant safety cap/hole cover
- 11/4" 8" sleeves available
- No field assembly required

Model No.	Penetrating Pipe Type(s)	Sleeve I.D.	Nominal Sleeve Riser Size
WD-0125	1/4"-3/4" - All types	1.53"	1-1/4″
WD-0200	1/4"-1-1/4" - All types	2.19"	2″
WD-0300	1"-2" - All types	3.33"	3″
WD-0400	1-1/4"-3" - All types	4.28"	4"
WD-0500	2-1/2"-4" - All types	5.22"	5″
WD-0600	3"-5" - All types	6.22"	6"
WD-0800	4"-6" - All types	8.21"	8″




HOLDRITE® HydroFlame™ -**Corrugated Deck Concrete Sleeve (Sleeve Only)**

- Fast, simple concrete sleeve for corrugated decks
- Custom cut to your specified height at no extra cost
- Includes OSHA compliant safety cap/hole cover
- 11/4" 8" sleeves available
- No field assembly required

Model No.	Penetrating Pipe Type(s)	Sleeve I.D.	Nominal Sleeve Riser Size
CD-0125	1/4"-3/4" - All types	1.53"	1-1/4"
CD-0200	1/4"-1-1/4" - All types	2.19"	2"
CD-0300	1"-2" - All types	3.33"	3"
CD-0400	1-1/4"-3" - All types	4.28"	4"
CD-0500	2-1/2"-4" - All types	5.22"	5″
CD-0600	3"-5" - All types	6.22"	6"
CD-0800	4"-6" - All types	8.21"	8″

Visit www.holdrite.com/hydroflame to create a **HOLDRITE**[®] **HydroFlame**[™] **Submittal** online within minutes, along with an Online Quote, CAD Drawings, Spec Sheets, and Installation Detail Drawings






–HOLDRITE® HydroFlame™ – Slab and Wall Seal Sleeve


- Mid-body seal provides watertight penetration
- Watertight seal helps protect property against water intrusion, mold, insects/termites, methane and radon gas
- Allows for expansion, contraction and movement
- Available for ½"-6" pipes and conduits
- Custom cut to your specified length
- For use through walls and slab-on-grade conditions Mid-body seal also available separately

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
HP-NP-0050	PVC, ccPVC, RNC & ABS	.840"	1/2"
HP-NP-0075	PVC, ccPVC, RNC & ABS	1.050"	3/4"
HP-NP-0100	PVC, ccPVC, RNC & ABS	1.315"	1"
HP-NP-0125	PVC, ccPVC, RNC & ABS	1.660"	1-1/4"
HP-NP-0150	PVC, ccPVC, RNC & ABS	1.900"	1-1/2"
HP-NP-0200	PVC, ccPVC, RNC & ABS	2.375"	2"
HP-NP-0250	PVC, ccPVC, RNC & ABS	2.875"	2-1/2"
HP-NP-0300	PVC, ccPVC, RNC & ABS	3.50"	3"
HP-NP-0400	PVC, ccPVC, RNC & ABS	4.5"	4"
HP-NP-0600	PVC, ccPVC, RNC & ABS	6.625"	6"
HP-CP-0050	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	.625"	1/2"
HP-CP-0075	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	0.875"	3/4"
HP-CP-0100	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.125"	1"
HP-CP-0125	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.375"	1-1/4"
HP-CP-0150	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	1.625"	1-1/2"
HP-CP-0200	CPVC:(Flowguard Gold SDR 11, SDR 11) & PEX	2.125"	2"
HP-CN-0050	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	.840"	1/2″
HP-CN-0075	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.050"	3/4"
HP-CN-0100	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.315"	1″
HP-CN-0125	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.660"	1-1/4"
HP-CN-0150	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	1.900"	1-1/2"
HP-CN-0200	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	2.375"	2″
HP-CN-0250	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	2.875"	2-1/2"
HP-CN-0300	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	3.50"	3″
HP-CN-0400	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	4.5"	4"
HP-CN-0600	CPVC:(Corzan, Blazemaster 13.5, SDR 13.5, Sch. 40 & 80)	6.625"	6"
HP-CT-0050	Copper	.625"	1/2″
HP-CT-0075	Copper	0.875"	3/4"
HP-CT-0100	Copper	1.125"	1″
HP-CT-0125	Copper	1.375"	1-1/4"
HP-CT-0150	Copper	1.625"	1-1/2"
HP-CT-0200	Copper	2.125"	2"
HP-CT-0250	Copper	2.625"	2-1/2"
HP-CT-0300	Copper	3.125"	3″
HP-CT-0400	Copper	4.125"	4"
HP-CT-0600	Copper	6.125"	6"
HP-CH-0200	Cast Iron - Extra Heavy	2.38"	2"

Water/Firestop Sleeves

Model No.	Penetrating Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
HP-CH-0300	Cast Iron - Extra Heavy	3.50"	3"
HP-CH-0400	Cast Iron - Extra Heavy	4.50"	4"
HP-CI-0150	Cast Iron - Service Weight	1.90"	1-1/2"
HP-CI-0200	Cast Iron - Service Weight	2.30"	2"
HP-CI-0300	Cast Iron - Service Weight	3.30"	3"
HP-CI-0400	Cast Iron - Service Weight	4.30"	4"
HP-CI-0600	Cast Iron - Service Weight	6.30"	6"
HP-CX-0150	Cast Iron - Hubless	1.90"	1-1/2"
HP-CX-0200	Cast Iron - Hubless	2.35"	2"
HP-CX-0300	Cast Iron - Hubless	3.35"	3"
HP-CX-0400	Cast Iron - Hubless	4.38"	4"
HP-CX-0500	Cast Iron - Hubless	5.30"	5″
HP-CX-0600	Cast Iron - Hubless	6.30"	6"
HP-ST-0050	Steel	.840"	1/2″
HP-ST-0075	Steel	1.050"	3/4"
HP-ST-0100	Steel	1.315"	1"
HP-ST-0125	Steel	1.660"	1-1/4"
HP-ST-0150	Steel	1.900"	1-1/2"
HP-ST-0200	Steel	2.375"	2"
HP-ST-0250	Steel	2.875"	2-1/2"
HP-ST-0300	Steel	3.50"	3″
HP-ST-0400	Steel	4.5"	4"
HP-ST-0600	Steel	6.625"	6"
HP-ET-0050	EMT	0.706"	1/2″
HP-ET-0075	EMT	0.922"	3/4"
HP-ET-0100	EMT	1.163"	1"
HP-ET-0125	EMT	1.51"	1-1/4"
HP-ET-0150	EMT	1.74"	1-1/2"
HP-ET-0200	EMT	2.197"	2"
HP-ET-0250	EMT	2.875"	2-1/2"
HP-ET-0300	EMT	3.5"	3"
HP-ET-0400	EMT	4.5"	4"
Model No.	Individual Mid-Body Seals for Pipe Type(s)	Pipe O.D.	Nominal Pipe Size
PS-NPMS-0200	PVC, ABS, IPS, Steel	2.375"	2"
PS-NPMS-0300	PVC, ABS, IPS, Steel	3.50"	3"
PS-NPMS-0400	PVC, ABS, IPS, Steel	4.50"	4"
2 22 27 2 2 7 3 0	PVC, ABS, IPS, Steel		6"





-HOLDRITE[®] HydroFlame[™] -**Aerator Adapter Box**

- Provides a recess in slab for fitting access
- Accepts 3", 4" and 6" HydroFlame sleeves 3½" tall x 6¾" wide x 9" height box For 8" or thicker concrete floors

- Ideal for Sovent® and other high and tight fitting joint access

Model No.	Pipe Type(s)	Size
AA-0304	PVC, ABS, No-Hub Cast Iron	3" or 4"
AA-06	PVC, ABS, No-Hub Cast Iron	6"

VIP Services Cost Savings Analysis











HOLDRITE® provides an estimating service that includes specification and submittal assistance, 3-D CAD and BIMready drawings, "installed cost"-savings analysis and custom installation detail pages. This no-cost service is available for any project.

No Cost material "Take-Off" for your next job

Performed by Estimators with over 20 years of plumbing experience

Savings analysis based on material and installation costs resulting from using HOLDRITE® products

Custom Installation Detail pages for each application in PDF or DWG CAD formats

Product drawings available in 5 formats, including BIM

Ideal for establishing "Shop Standards"

Specification and Submittal assistance


HOLDRITE APPLICATION SAVINGS EXAMPLES


Application	Holdrite Product(s)	"Installed Cost" Savings Examples Shown @ \$40.00/Hr. Labor Rate)
Overhead Cast-In-Place Hanger	125-D	\$7.40 (Double Pipe Run)
Suspended Equipment Platform	40-SWHP-A	\$8.33
Lavatory Sink (PEX-to-Copper Stub Out)	103-18/701	\$1.86
Flush Valve Support	114-CO	\$1.18
Overhead Med-Gas Trapeze	EZ-1/250	\$16.90

LABOR COST CALCULATOR


		Time 5	Spent								
		1	2	3	4	5	6	7	8	9	10
	\$Hr.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.
	\$10.00	\$0.17	\$0.33	\$0.50	\$0.67	\$0.83	\$1.00	\$1.17	\$1.33	\$1.50	\$1.67
	\$15.00	\$0.25	\$0.50	\$0.75	\$1.00	\$1.25	\$1.50	\$1.75	\$2.00	\$2.25	\$2.50
_ (Se	\$20.00	\$0.33	\$0.67	\$1.00	\$1.33	\$1.67	\$2.00	\$2.33	\$2.67	\$3.00	\$3.33
۲ (\$) Taxes)	\$25.00	\$0.42	\$0.83	\$1.25	\$1.67	\$2.08	\$2.50	\$2.92	\$3.33	\$3.75	\$4.17
۳ ۱	\$30.00	\$0.50	\$1.00	\$1.50	\$2.00	\$2.50	\$3.00	\$3.50	\$4.00	\$4.50	\$5.00
o is	\$35.00	\$0.58	\$1.17	\$1.75	\$2.33	\$2.92	\$3.50	\$4.08	\$4.66	\$5.25	\$5.83
E E	\$40.00	\$0.67	\$1.33	\$2.00	\$2.67	\$3.33	\$4.00	\$4.66	\$5.33	\$6.00	\$6.66
TOTAL COST PER HOUR age + Over + Benefits + T	\$45.00	\$0.75	\$1.50	\$2.25	\$3.00	\$3.75	\$4.50	\$5.25	\$6.00	\$6.75	\$7.50
는 현	\$50.00	\$0.83	\$1.67	\$2.50	\$3.33	\$4.17	\$5.00	\$5.83	\$6.66	\$7.50	\$8.33
. cost	\$55.00	\$0.92	\$1.83	\$2.75	\$3.67	\$4.58	\$5.50	\$6.41	\$7.33	\$8.25	\$9.16
ည နို	\$60.00	\$1.00	\$2.00	\$3.00	\$4.00	\$5.00	\$6.00	\$7.00	\$8.00	\$9.00	\$10.00
ᅻᄋ	\$65.00	\$1.08	\$2.17	\$3.25	\$4.33	\$5.41	\$6.50	\$7.58	\$8.66	\$9.75	\$10.83
1 i	\$70.00	\$1.17	\$2.33	\$3.50	\$4.66	\$5.83	\$7.00	\$8.16	\$9.33	\$10.50	\$11.66
тот (Wage	\$75.00	\$1.25	\$2.50	\$3.75	\$5.00	\$6.25	\$7.50	\$8.75	\$10.00	\$11.25	\$12.50
٤	\$80.00	\$1.33	\$2.67	\$4.00	\$5.33	\$6.66	\$8.00	\$9.33	\$10.66	\$12.00	\$13.33
	\$85.00	\$1.42	\$2.83	\$4.25	\$5.66	\$7.08	\$8.50	\$9.91	\$11.33	\$12.74	\$14.16
	\$90.00	\$1.50	\$3.00	\$4.50	\$6.00	\$7.50	\$9.00	\$10.50	\$12.00	\$13.49	\$14.99
	\$95.00	\$1.58	\$3.17	\$4.75	\$6.33	\$7.91	\$9.50	\$11.08	\$12.66	\$14.24	\$15.83
	\$100.00	\$1.67	\$3.33	\$5.00	\$6.66	\$8.33	\$10.00	\$11.66	\$13.33	\$14.99	\$16.66

Quick Search by Application

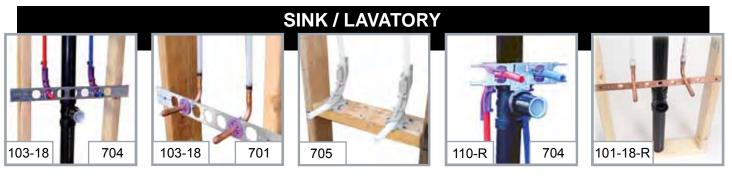

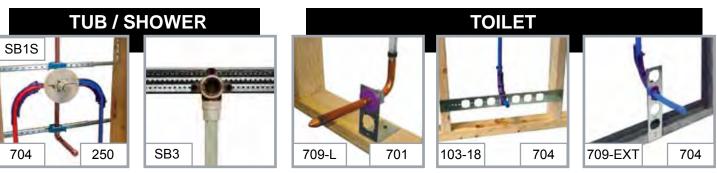



















Quick Search by Application Quick Search by Application


CPVC


SINK / LAVATORY SB1S 103-18 701 SB1S 211 250 601-20 601-26






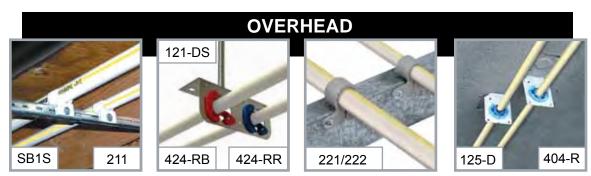














COPPER RESIDENTIAL/COMMERCIAL

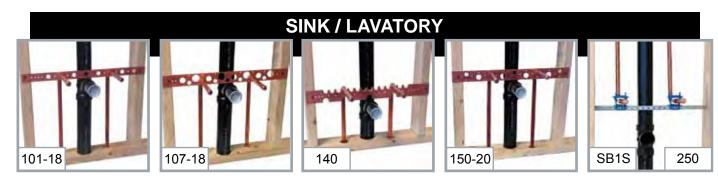


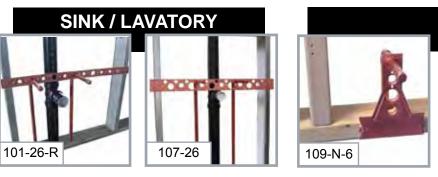

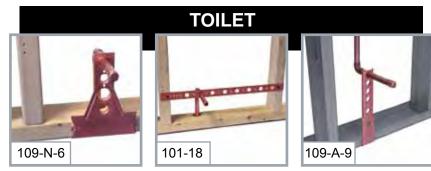

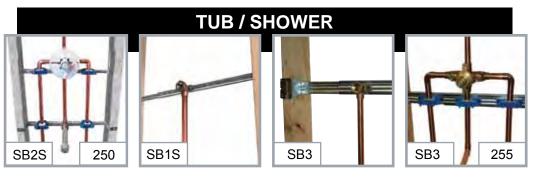

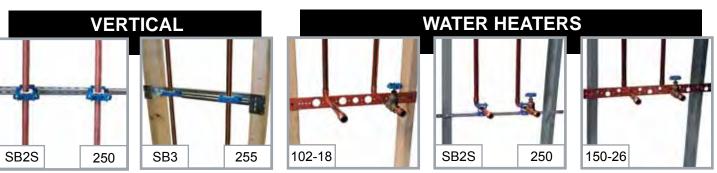

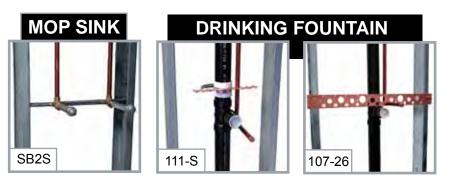

www.holdrite.com

102-26

URINAL


Quick Search by Application

PRE-FAB & SPECIALITY APPLICATIONS

SINK / LAVATORY 110-S-1/2 118-T-6






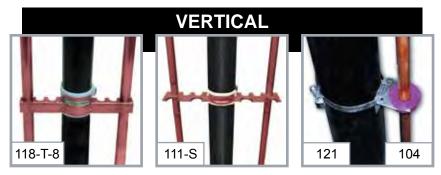









INSERTS AND CLAMPS

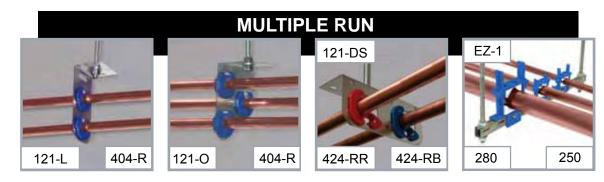

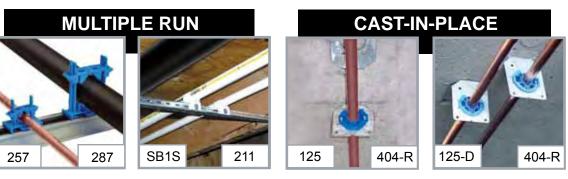

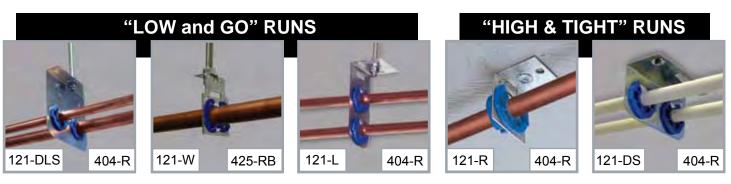


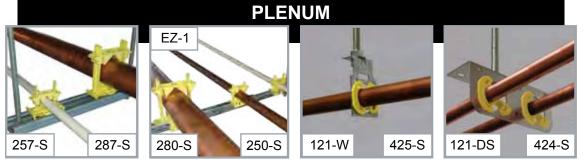

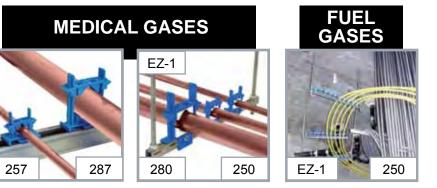

TELESCOPING SUPPORT BRACKETS


SINK / LAVATORY TUB / SHOWER SB1S 250 SB4 255 SB1S SB3 SB2S 250

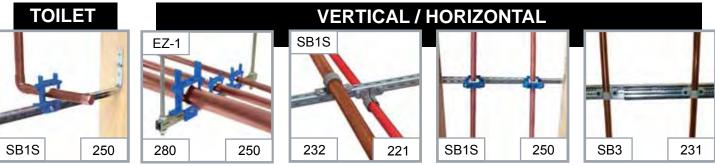









TELESCOPING BRACKET LOADING DATA (max load)

HOLDRITE® EZ-STRUT™

Beam Span	Model#	Uniform Load	Center Pt. Load
12"	EZ-1	1100	1000
18"	EZ-1	510	500
21"	EZ-1	360	360
23"	EZ-2	600	400
30"	EZ-2	534	400
36"	EZ-2	175	160
40"	EZ-2	153	120

Based on single beam condition

HOLDRITE STOUT BRACKET®

Beam Span	Model#	Center Pt. Load	
10"	SB1	400	
10-1/4"	SB3	863	
14-1/2"	SB1	164	
14-1/2	SB3	480	
16"	SB3	322	
10	SB4	550	
18"	SB1	104	
10	SB2	158	
22-1/2"	SB2	124	
ZZ-1/Z	SB4	271	
24"	SB2	68	
24	SB4	228	

NOISE AND VIBRATION ISOLATION


















Material Take-Off Sheet

(800) 321-0316

Job Name Co. Name Address

www.holdrite.com

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

Date	P.O. #
Estimate#	

Contact		Phone		
Quantity	Model #	Product Description	Box Qty	Page No.
	100-18	20" flat, Copper-Bonded bracket positions 1/2" pipe	100	17
	101-18	20" flat, Copper-Bonded bracket positions 1/2" pipe	50	17, 71
	101-18R	20" extruded holes, Copper-Bonded bracket positions 1/2" pipe	25	9, 17, 69
	101-26	26" flat, Copper-Bonded bracket positions 1/2" pipe	50	21
	101-26R	26" extruded holes, Copper-Bonded bracket positions 1/2" or 3/4" pipe	25	9, 71
	101-F	3" floor place, Copper-Bonded floor plate	50	18
	102-18	20" flat, Copper-Bonded bracket positions 3/4" or 1" pipe	50	17, 71
	102-26	26" flat, Copper-Bonded bracket positions 1/2", 3/4" or 1" pipe	50	21
	103-18	20" flat, galvanized bracket with 1-3/8" keyed holes	50	8, 13, 69, 70, 75
	103-18-701	20" flat galvanized bracket & 1/2" #701 stub-out clamps (Bulk Qty: 50 brckts, 100 inserts)	Bulk	8
	103-26	26" flat, galvanized bracket with 1-3/8" keyed holes	50	8, 13, 69
	103-26-701	26" flat galvanized bracket & 1/2" #701 stub-out clamps (Bulk Qty: 50 brckts, 100 inserts)	Bulk	8
	104	1/2" plastic insert for use with #103 brackets	100	11, 41, 72
	105	3/4" plastic insert for use with #103 brackets	100	11, 41
	106	1" plastic insert for use with #103 brackets	100	11, 41
	107-18	20" flat, Copper-Bonded bracket positions 1/2", 3/4" or 1" pipe	50	17, 71
	107-26	26" flat copper-bonded bracket positions 1/2", 3/4", 1" & 1-1/4" pipe	50	21, 71
	108-20	20" extruded holes, Copper Bonded bracket positions 1/2", 3/4" or 1" pipe	50	17
	108-26	26" extruded holes, Copper-Bonded bracket positions 1/2", 3/4" or 1" pipe	50	21
	109-A-9	"L" bracket with four 1/2" extruded holes at 2-3/4", 4-1/2", 6", 7", 8" or 9"	50	22, 71
	109-N-6	Copper-Bonded steel bracket made to position 1/2" and 3/4" copper pipe	50	18, 70
	110-R	Galvanized steel bracket for acoustical pipe-on-pipe support for 1/2", 3/4" or 1"	50	10, 69, 75
	110-S-1/2	Copper-Bonded bracket with 1/2" notches on 1" centers	50	22, 72
	111-S	Copper-Bonded bracket for 1/2" and 3/4" pipes.	50	22, 71, 72
	114-C	Copper-Bonded carrier bracket secures flush valve stub out	6	22, 72
	114-C-EXT	Provides additional height of 8-1/2" to 25-1/2" for carrier bracket	6	23, 72
	114-CO	Copper-Bonded offset carrier bracket secures flush valve stub out	6	22, 72
	114-COH	Coppe-Bonded offset carrier bracket secures flush valve stub out	6	22
	114-CR	Copper-Bonded carrier bracket with 1-1/8" notch at the top	6	22, 72
	115	Galvanized steel bracket secures 1/2" through 2" pipe	25	23, 72
	115-C	Copper-Bonded steel bracket secures 1/2" through 2" pipe	25	23, 72
	117-3K	Restraint Kits (2" - 3" Hubless Cast Iron 1/4 Bend SS)	6	28, 72
	117-4K	Restraint Kits (4" Hubless Cast Iron 1/4 Bend SS)	6	28, 72
	117-5K	Restraint Kits (5" Hubless Cast Iron 1/4 Bend SS)	6	28, 72
	117-6K	Restraint Kits (6" Hubless Cast Iron 1/4 Bend SS)	6	28, 72
	117-8K	Restraint Kits (8" Hubless Cast Iron 1/4 Bend SS)	6	28, 72
	117-10K	Restraint Kits (10" Hubless Cast Iron 1/4 Bend SS)	2	28
	117-12K	Restraint Kits (12" Hubless Cast Iron 1/4 Bend SS)	1	28
	117-15K	Restraint Kits (15" Hubless Cast Iron 1/4 Bend SS)	1	28
	117-3L	Restraint Kits (3" Hubless Cast Iron 1/8 Bend)	1	28
	117-4L	Restraint Kits (4" Hubless Cast Iron 1/8 Bend)	1	28

(800) 321-0316

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

www.holdrite.com

P.O. #

Job Name Co. Name Address

Contact

Estimate#

Quantity	Model #	Product Description	Box Qty	Page No.
	117-5L	Restraint Kits (5" Hubless Cast Iron 1/8 Bend)	1	28
	117-6L	Restraint Kits (6" Hubless Cast Iron 1/8 Bend)	1	28
	117-8L	Restraint Kits (8" Hubless Cast Iron 1/8 Bend)	1	28
	117-10L	Restraint Kits (10" Hubless Cast Iron 1/8 Bend)	1	28
	117-12L	Restraint Kits (12" Hubless Cast Iron 1/8 Bend)	1	28
	117-15L	Restraint Kits (15" Hubless Cast Iron 1/8 Bend)	1	28
	117-4W	Restraint Kits (4" Hubless Cast Iron Wye/Santee)	1	29
	117-4x3W	Restraint Kits (4"x3" Hubless Cast Iron Wye/Santee)	1	29
	117-5W	Restraint Kits (5" Hubless Cast Iron Wye/Santee)	1	29
	117-5x4W	Restraint Kits (5"x4" Hubless Cast Iron Wye/Santee)	1	29
	117-6W	Restraint Kits (6" Hubless Cast Iron Wye/Santee)	1	29
	117-6x5W	Restraint Kits (6" Hubless Cast Iron Wye/Santee)	1	29
	117-6x4W	Restraint Kits (6" Hubless Cast Iron Wye/Santee)	1	29
	117-8W	Restraint Kits (8" Hubless Cast Iron Wye/Santee)	1	29
	117-8x6W	Restraint Kits (8" Hubless Cast Iron Wye/Santee)	1	29
	117-8x5W	Restraint Kits (8" Hubless Cast Iron Wye/Santee)	1	29
	117-8x4W	Restraint Kits (8" Hubless Cast Iron Wye/Santee)	1	29
	117-8x3W	Restraint Kits (8" Hubless Cast Iron Wye/Santee)	1	29
	117-3CM	Restraint Kits (3" Hubless Cast Iron Combo)	1	29
	117-4CM	Restraint Kits (4" Hubless Cast Iron Combo)	1	29
	117-4x3CM	Restraint Kits (4" Hubless Cast Iron Combo)	1	29
	117-5CM	Restraint Kits (5" Hubless Cast Iron Combo)	1	29
	117-5x4CM	Restraint Kits (5" Hubless Cast Iron Combo)	1	29
	117-6CM	Restraint Kits (6" Hubless Cast Iron Combo)	1	29
	117-6x5CM	Restraint Kits (6" Hubless Cast Iron Combo)	1	29
	117-6x4CM	Restraint Kits (6" Hubless Cast Iron Combo)	1	29
	117-8CM	Restraint Kits (8" Hubless Cast Iron Combo)	1	29
	117-8x6CM	Restraint Kits (8" Hubless Cast Iron Combo)	1	29
	117-8x5CM	Restraint Kits (8" Hubless Cast Iron Combo)	1	29
	117-8x4CM	Restraint Kits (8" Hubless Cast Iron Combo)	1	29
	117-3CE	Restraint Kits (3" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-4CE	Restraint Kits (4" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-4x3CE	Restraint Kits (4" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-5CE	Restraint Kits (5" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-5x4CE	Restraint Kits (5" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-6CE	Restraint Kits (6" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-6x5CE	Restraint Kits (6" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-6x4CE	Restraint Kits (6" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-8CE	Restraint Kits (8" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-8x6CE	Restraint Kits (8" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-8x5CE	Restraint Kits (8" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-8x4CE	Restraint Kits (8" Hubless Cast Iron Combo w/Blind Plug)	1	28
	117-4x2R	Restraint Kits (4"x2" Hubless Cast Iron Short Reducer)	1	30

Job Name

117-6x2R

117-6x3R

117-6x4R

117-6x5R

117-8x2R

117-8x3R

117-8x4R

117-8x5R

117-8x6R

117-3T

117-4T

117-5T

117-6T

117-8T

117-3BP

117-4BP

117-5BP

117-6BP 117-8BP

117-3S

117-4S

117-5S

117-6S

117-8S

117-10S

117-12S

117-15S

118-T6

118-T8

121

121-D

121-DLS

121-DS

121-L

121-0

121-R

121-RLS

121-W

www.holdrite.com

30

30

30

30

30

30

30

30

30

30

30

30

30

30

29

29

29

29

29

30

30

30

30

30

30

30

30

23, 72

23. 72

23, 72

10, 15, 26, 46

10, 15, 26, 46, 73

10, 15, 26, 46, 69, 70, 73

10, 15, 26, 46, 73

26, 47, 73

9, 15, 25, 46, 73

9, 15, 25, 46

9, 15, 25, 46, 73

1

1

1

50

50

25

25

25

25

25

25

25

25

25

 Date	F
Estimate#	

Restraint Kits (6"x2" Hubless Cast Iron Short Reducer)

Restraint Kits (6"x3" Hubless Cast Iron Short Reducer)

Restraint Kits (6"x4" Hubless Cast Iron Short Reducer)

Restraint Kits (6"x5" Hubless Cast Iron Short Reducer)

Restraint Kits (8"x2" Hubless Cast Iron Short Reducer)

Restraint Kits (8"x3" Hubless Cast Iron Short Reducer)

Restraint Kits (8"x4" Hubless Cast Iron Short Reducer)

Restraint Kits (8"x5" Hubless Cast Iron Short Reducer)

Restraint Kits (8"x6" Hubless Cast Iron Short Reducer)

Restraint Kits (4" Hubless Cast Iron Test Tee Support)

Restraint Kits (5" Hubless Cast Iron Test Tee Support)

Restraint Kits (6" Hubless Cast Iron Test Tee Support)

Restraint Kits (8" Hubless Cast Iron Test Tee Support)

Restraint Kits (4" Hubless Cast Iron Blind Plug Support)

Restraint Kits (5" Hubless Cast Iron Blind Plug Support) Restraint Kits (6" Hubless Cast Iron Blind Plug Support)

Restraint Kits (8" Hubless Cast Iron Blind Plug Support)

Restraint Kits (2" - 3" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (4" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (5" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (6" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (8" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (10" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (12" Hubless Cast Iron Soil Pipe End-to-End Support)

Restraint Kits (15" Hubless Cast Iron Soil Pipe End-to-End Support)

Copper-bonded pipe on pipe support bracket- 1/2" & 3/4" (3/4" on 6" centers)

Copper-bonded pipe on pipe support bracket- 1/2" & 3/4" (3/4" on 8" centers)

Galvanized steel bracket that supports two lines of copper, PEX or CPVC tubing

Galvanized steel bracket that supports two lines of copper, PEX or CPVC tubing

Galvanized steel bracket that supports two lines of copper, PEX or CPVC tubing

Galvanized steel bracket that supports two lines of copper, PEX or CPVC tubing

Galvanized steel bracket that supports three lines of copper, PEX or CPVC tubing

Galvanized steel bracket that supports one copper, PEX or CPVC tube

Restraint Kits (2" - 3" Hubless Cast Iron Blind Plug Support)

Restraint Kits (2" - 3" Hubless Cast Iron Test Tee Support)

Co. Name Address		Estimate#					
Contact		Phone					
Quantity	Model #	Product Description	Box Qty	Page No.			
	117-4x3R	Restraint Kits (4"x3" Hubless Cast Iron Short Reducer)		30			
	117-5x2R	2R Restraint Kits (5"x2" Hubless Cast Iron Short Reducer)		30			
	117-5x3R	5x3R Restraint Kits (5"x3" Hubless Cast Iron Short Reducer)		30			
	117-5x4R	Restraint Kits (5"x4" Hubless Cast Iron Short Reducer)	1	30			

(800) 321-0316

www.holdrite.com

P.O. # Job Name Co. Name Address

Quantity	Model #	Product Description	Box Qty	Page No.
	125-D	Concrete Insert Bracket with 121-D Centerlines	50	26, 47, 70, 73
	130	Single solid copper clip for 1/2" pipe	100	18
	131	Single solid copper clip for 3/4" pipe	100	18
	132	Single solid copper clip for 1" pipe	100	18
	140	20" Copper-Bonded bracket with extruded notches for 1/2" or 3/4" pipe	50	18, 71
	141	20" Copper-Bonded 90° bracket with extruded notches for 1/2" or 3/4" pipe	50	18
	150-20	20" flat, Copper-Bonded bracket positions 1/2" or 3/4" pipe	50	18, 71
	150-26	26" flat, Copper-Bonded bracket positions 1/2" or 3/4" pipe	50	21, 71
	170	18" Galvanized Steel Bracket	50	14, 18
	170-C	18" 90° Copper-Bonded bracket	50	18
	170-26	26" Galvanized steel bracket	50	14
	170-251	18" Galvanized Steel Bracket & acoustic PPE clamp (Bulk Qty: 50 brckts 100clamps)	Bulk	14
	201	Strong quick-closing clamp for single 1/2" pipe	50	33
	202	Strong quick-closing clamp for single 3/4" pipe	50	33
	211	Half moon, fire retardant PVC Clamp for 1/2" pipe	50	13, 33, 70, 73, 74
	212	Half moon, fire retardant PVC Clamp for 3/4" pipe	100	13, 33, 70
	221	1/2" Suspension pipe clamp	100	14, 24, 41, 69, 70, 74
	222	3/4" Suspension pipe clamp	100	14, 24, 41, 70
	221-S	1/2" Suspension pipe clamp; meets ASTM E-84 25/50	100	42
	222-S	3/4" Suspension pipe clamp; meets ASTM E-84 25/50	100	42
	223	1" Suspension pipe clamp	50	14, 24, 41
	224	1-1/4" Suspension pipe clamp	25	14, 24, 41
	225	1-1/2" Suspension pipe clamp	25	14, 24, 41
	226	2" Suspension pipe clamp	25	14, 24, 41
	231	1/2" Standard pipe clamp	100	14, 24, 41, 69, 74
	232	3/4" Standard pipe clamp	100	14, 24, 41, 74
	231-S	1/2" Standard pipe clamp; meets ASTM E-84 25/50	100	43
	232-S	3/4" Standard pipe clamp; meets ASTM E-84 25/50	100	43
	233	1" Standard pipe clamp	50	14, 24, 41
	234	1-1/4" Standard pipe clamp	25	14, 24, 41
	235	1-1/2" Standard pipe clamp	25	14, 24, 41
	236	2" Standard pipe clamp	25	14, 24, 41
	250	Sound rated variable closure clamp. Supports up to 1" CTS sizes.	50	19, 25, 33, 37, 45, 69, 70, 71, 72, 73, 74, 75
	250-S	Variable closure clamp-supports up to 1" CTS pipe sizes; meets ASTM E-84 25/50	50	43, 45, 72, 73, 74
	251	Sound-Rated, polypropylene, variable closure clamp. Requires no tools	50	14, 19
	255	Acoustical standard clamp - supports up to 1" CTS sizes	50	33, 37, 70, 71, 74, 75
	255-S	Standard clamp - supports up to 1" CTS sizes; meets ASTM E-84 25/50	50	43
	257	Variable size strut clamp. Supports up to 1" CTS	50	45, 73
	257-P	Sound rated variable size strut clamp. Supports up to 1" CTS	50	37, 45, 75
	257-S	Variable size strut clamp. Supports up to 1" CTS; meets ASTM E-84 25/50	50	43, 45, 73
	261	1/2" Acoustical thru stud isolator/Suspension clamp	50	37, 75
	262	3/4" Acoustical thru stud isolator/Suspension clamp	50	37

Galvanized steel bracket that supports one copper, PEX or CPVC tube

Galvanized steel bracket that supports one copper, PEX or CPVC tube

Galvanized steel bracket that supports one copper, PEX or CPVC tube

Contact

www.holdrite.com

HOLDRITE Material	"Take-off"	Sheet and 2	012 Catalog Page	# Locator

Job Name	Date	P.O. #
Co. Name	Estimate#	
Address		

Phone

Quantity	Model #	Product Description	Box Qty	Page No.
	263	1" Acoustical thru stud isolator/Suspension clamp	50	37, 75
	264	1-1/4" Acoustical thru stud isolator/Suspension clamp	50	37
	265	Shower Head / Tub Spout Clamp	50	37, 75
	270	3/4" Wide acoustical sound insulation lining	50' roll	38
	271	2" wide neoprene acoustical sound insulation liner with adhesive backing	25' roll	38, 75
	272-2	2" wide X 1/4" thick polyester felt. Acoustical isolation w/adhesive backing (24 rolls/box)	25' roll	38, 75
	274	2" X 2" X 3/4" acoustical riser pad (36 pads/sheet and 5 sheets/box = 180 pads)	180	38, 75
	275	2" x 2" x 3/4" acoustical riser pad w/10ga steel bearing plate attached	144	38
	275-T	2" x 2" x 3/4" acoustical riser pad w/10ga steel bearing plate w/positioning tabs attached	144	38, 75
	276	2" X 2" X 1/4" acoustical riser pad	50	38, 75
	278	2" X 2" X 1/4" acoustical riser pad w/ 10 gage galv steel bearing plate attached	50	38, 75
	280	Sound rated variable closure clamp. Supports up to 2" IPS pipe sizes.	25	19, 25, 33, 37, 45, 72, 73, 74, 75
	280-S	Variable closure clamp. Supports up to 2" IPS pipe sizes; meets ASTM E-84 25/50	25	43, 45, 72, 73, 74
	285	Sound rated variable closure clamp. Supports up to 2" IPS pipe sizes.	25	33, 37
	285-S	Variable closure clamp. Supports up to 2" IPS pipe sizes; meets ASTM E-84 25/50	25	43
	287	Variable size strut clamp. Supports up to 1"-2" IPS sizes	25	45, 73
	287-P	Sound rated variable size strut clamp. Supports up to 1"-2" IPS sizes	25	37, 45, 75
	287-S	Variable size strut clamp. Supports up to 2" IPS sizes; meets ASTM E-84 25/50	25	43, 45, 73
	300	Swivel Loop Hangers - 1/2" CTS	100	38, 47
	301	Acoustic Loop Hanger 1/2"	100	38, 47
	302	Acoustic Loop Hanger 3/4"	100	38, 47
	303	Acoustic Loop Hanger 1"	100	38, 47
	304	Acoustic Loop Hanger 1-1/4"	100	38, 47
	305	Acoustic Loop Hanger 1-1/2"	100	38, 47
	306	Acoustic Loop Hanger 2"	100	38, 47
	307	Acoustic Loop Hanger 2-1/2"	50	38, 47
	308	Acoustic Loop Hanger 3"	50	38, 47, 75
	310	Acoustic Loop Hanger 4"	25	38, 47
	320	J-Hangers - 1/2" CTS	50	39, 47
	321	Acoustic J-Hanger 1/2"	50	39, 47, 75
	322	Acoustic J-Hanger 3/4"	50	39, 47
	323	Acoustic J-Hanger 1"	50	39, 47
	324	Acoustic J-Hanger 1-1/4"	50	39, 47
	325	Acoustic J-Hanger 1-1/2"	50	39, 47
	326	Acoustic J-Hanger 2"	50	39, 47
	327	Acoustic J-Hanger 2-1/2"	25	39, 47
	328	Acoustic J-Hanger 3"	25	39, 47
	330	Acoustic J-Hanger 4"	25	39, 47
	30-SWHP-M	Suspended Water Heater Platform/Drain Pan (24" Diameter) Metal Drain Fitting	1	53
	40-S-22-A	22" Water heater stand, assembled, supports up to 52 gallons/650 lbs.	1	54
	40-S-22-U	22" Water heater stand, unassembled, supports up to 52 gallons/650 lbs.	1	54
	40-S-24-A	24" Water heater stand, assembled, supports up to 100 gallons/1,200 lbs.	1	54

(800) 321-0316

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

www.holdrite.com

Job Name Co. Name Address

Contact

Date

Estimate#

P.O. #

Quantity	Model #	Product Description	Box Qty	Page No.
	40-S-24-U	24" Water heater stand, unassembled, supports up to 100 gallons/1,200 lbs.	1	54
	40-S-30-U	30" Water heater stand, assembled, supports up to 100 gallons/1,200 lbs.	1	54
	40-SWHP-A	Suspended Water Heater Platform/Drain Pan Assembled (21-1/2" diameter)	1	53
	40-SWHP	Suspended Water Heater Platform/Drain Pan (21-1/2" Diameter)	1	53
	40-SWHP-M	Suspended Water Heater Platform/Drain Pan (21-1/2" Diameter) Metal Drain Fitting	1	53
	40-SWHP-W	Wall Mounted Water Heater Platform/Drain Pan (21-1/2" Diameter)	1	53
	40-SWHP-WM	Wall Mounted Water Heater Platform/Drain Pan (21-1/2" Diameter) Metal Drain Fitting	1	53
	404-R	1/2" Fire retardant inserts / Metal Stud insulators	100	11, 24, 42, 70, 73
	405-R	3/4" Fire retardant inserts / Metal Stud insulators	100	11, 24, 42
	406-R	1" Fire retardant inserts / Metal Stud insulators	100	11, 24, 42
	424	GREY 1/2" CTS Insert. Meets UL 94 HB requirements	50	11, 14, 24, 41, 69, 70, 71
	425	GREY 3/4" CTS Insert. Meets UL 94 HB requirements	50	11, 14, 24, 41
	426	GREY 1" CTS Insert. Meets UL 94 HB requirements	50	11, 14, 24, 41
	424-C	GREY 1/2" ABS Insert. Meets UL 94 HB requirements	50	24, 70
	425-C	GREY 3/4" ABS Insert. Meets UL 94 HB requirements	50	24
	426-C	GREY 1" ABS Insert. Meets UL 94 HB requirements	50	24
	424-RB	BLUE 1/2" CTS Insert. Meets UL 94-V2 requirements	50	42, 69, 70, 73
	425-RB	BLUE 3/4" CTS Insert. Meets UL 94-V2 requirements	50	42, 73
	426-RB	BLUE 1" CTS Insert. Meets UL 94-V2 requirements	50	42
	424-RR	RED 1/2" CTS Insert. Meets UL 94-V2 requirements	50	42, 69, 70, 73
	425-RR	RED 3/4" CTS Insert. Meets UL 94-V2 requirements	50	42
	426-RR	RED 1" CTS Insert. Meets UL 94-V2 requirements	50	42
	424-S	YELLOW 1/2" CTS Insert. Meets ASTM E-84 25/50 & UL 94 V-0 requirements	25	42, 73
	425-S	YELLOW 3/4" CTS Insert. Meets ASTM E-84 25/50 & UL 94 V-0 requirements	25	42, 73
	426-S	YELLOW 1" CTS Insert. Meets ASTM E-84 25/50 & UL 94 V-0 requirements	25	42
	50-SWHP-A	Suspended Water Heater Platform/Drain Pan Assembled (26-1/2" diameter)	1	53
	50-SWHP	Suspended Water Heater Platform/Drain Pan (26-1/2" Diameter)	1	53
	50-SWHP-M	Suspended Water Heater Platform/Drain Pan Metal Drain Connection (26-1/2" diameter)	1	53
	50-SWHP-W	Wall Mounted Water Heater Platform/Drain Pan (26-1/2" Diameter)	1	53
	50-SWHP-WM	Wall Mounted Water Heater Platform/Drain Pan Metal Drain Connection (26-1/2" diameter)	1	53
	601-20	20" Galvanized steel bracket to support CPVC piping	50	13, 70
	601-26	26" Galvanized steel bracket to support CPVC piping	50	13, 70
	604	1/2" Grooved insert, CPVC compatible, 1" OD	100	13, 70
	605	3/4" Grooved insert 3/4" CPVC compatible, 1" OD	100	13, 70
	609-N-6	18-gauge galvanized steel bracket with 1" holes on 2" centers	50	13, 70
	701	Stub-out clamp supports 1/2" PEX tubing, Copper & CPVC	50	8, 13, 69, 70
	704	Bend support for use with 1/2" or 3/8" PEX tubing	100	8, 69
	705	Bend support for use with 1/2" or 3/8" PEX tubing	100	10
	706	Bend support for use with 1/2" or 3/8" PEX tubing	100	10, 69
	707	In-slab, flexible tube support. Holds one tube up to 7/8" O.D.	25	11, 69
	707-E	Single run PEX POP-UP for PEX, soft copper, flexible conduit. Tube sizes 3/8" thru 7/8" O.D.	25	11
	708	In-slab, flexible tube support. Holds up to two tubes, up to 1-1/8" O.D.	15	11, 69
	708-E	In-slab, flexible tube support. Holds up to two tubes, up to 2" O.D.	15	11, 69

Job Name

Co. Name

Address

Contact

www.holdrite.com

P.O. #

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

Estimate#

Phone

Quantity	Model #	Product Description	Box Qty	Page No.
	709	Galvanized bracket with 1-3/8" keyed holes, 7-1/5" long	50	8, 69
	709-EXT	Galvanized "L" bracket with 1-3/8" keyed holes at 2", 4", 6" and 8"	50	8, 69, 70, 75
	709-L	Galvanized "L" bracket with 1-3/8" keyed holes	50	8, 69, 70, 75
	721	Galvanized bracket 3.38" x 2.75" with keyed hole	50	9
	EZ-1	EZ-Strut, Adjustable length trapeze from 12"-21"	25	32, 39, 45, 72, 73, 74
	EZ-2	EZ-Strut, Adjustable length trapeze from 23"-40"	25	32, 39, 45
	Felt 100	2" wide X 1/8" thick polyester felt. Acoustical isolation lining with adhesive backing	100' roll	38
	HR 704062	Clevis Hanger for 5/8" pipe with 1/2" insualtion	10	48
	HR 704087	Clevis Hanger for 7/8" pipe with 1/2" insualtion	10	48
	HR 704112	Clevis Hanger for 1-1/8" pipe with 1/2" insualtion	10	48
	HR 704137	Clevis Hanger for 1-3/8" pipe with 1/2" insualtion	10	48
	HR 704162	Clevis Hanger for 1-5/8" pipe with 1/2" insualtion	10	48
	HR 704212	Clevis Hanger for 2-1/8" pipe with 1/2" insualtion	10	48
	HR 704262	Clevis Hanger for 2-5/8" pipe with 1/2" insualtion	10	48
	HR 704312	Clevis Hanger for 3-1/8" pipe with 1/2" insualtion	5	48
	HR 704412	Clevis Hanger for 4-1/8" pipe with 1/2" insualtion	5	48
	HR 708062	Clevis Hanger for 5/8" pipe with 1" insulation	10	48
	HR 708087	Clevis Hanger for 7/8" pipe with 1" insulation	10	48
	HR 708112	Clevis Hanger for 1-1/8" pipe with 1" insulation	10	48
	HR 708137	Clevis Hanger for 1-3/8" pipe with 1" insulation	10	48
	HR 708162	Clevis Hanger for 1-5/8" pipe with 1" insulation	10	48
	HR 708212	Clevis Hanger for 2-1/8 pipe with 1" insulation	5	48
	HR 708262	Clevis Hanger for 2-5/8" pipe with 1" insulation	5	48
	HR 708312	Clevis Hanger for 3-1/8" pipe with 1" insulation	5	48
	HR 724062	Steel Strut Mount for 5/8" pipe with 1/2" insualtion	20	49
	HR 724087	Steel Strut Mount for 7/8" pipe with 1/2" insualtion	20	49
	HR 724112	Steel Strut Mount for 1-1/8" pipe with 1/2" insualtion	20	49
	HR 724137	Steel Strut Mount for 1-3/8" pipe with 1/2" insualtion	20	49
	HR 724162	Steel Strut Mount for 1-5/8" pipe with 1/2" insualtion	10	49
	HR 724212	Steel Strut Mount for 2-1/8" pipe with 1/2" insualtion	10	49
	HR 724262	Steel Strut Mount for 2-5/8" pipe with 1/2" insualtion	10	49
	HR 724312	Steel Strut Mount for 3-1/8" pipe with 1/2" insualtion	10	49
	HR 724412	Steel Strut Mount for 4-1/8" pipe with 1/2" insualtion	10	49
	HR 726062	Steel Strut Mount for 5/8" pipe with 3/4" insulation	10	49
	HR 726087	Steel Strut Mount for 7/8" pipe with 3/4" insulation	10	49
	HR 726112	Steel Strut Mount for 1-1/8" pipe with 3/4" insulation	10	49
	HR 726137	Steel Strut Mount for 1-3/8" pipe with 3/4" insulation	10	49
	HR 726162	Steel Strut Mount for 1-5/8" pipe with 3/4" insulation	10	49
	HR 726212	Steel Strut Mount for 2-1/8" pipe with 3/4" insulation	10	49
	HR 726262	Steel Strut Mount for 2-5/8" pipe with 3/4" insulation	10	49
	HR 726312	Steel Strut Mount for 3-1/8" pipe with 3/4" insulation	10	49
	HR 726362	Steel Strut Mount for 3-5/8" pipe with 3/4" insulation	10	49
	HR 726412	Steel Strut Mount for 4-1/8" pipe with 3/4" insulation	10	49

(800) 321-0316

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

www.holdrite.com

Job Name Co. Name Address

Contact

P.O. #

Phone

Estimate#

Date

Quantity	Model #	Product Description	Box Qty	Page No.
	HR 728062	Steel Strut Mount for 5/8" pipe with 1" insulation	10	49
	HR 728087	Steel Strut Mount for 7/8" pipe with 1" insulation	10	49
	HR 728112	Steel Strut Mount for 1-1/8" pipe with 1" insulation	10	49
	HR 728137	Steel Strut Mount for 1-3/8" pipe with 1" insulation	10	49
	HR 728162	Steel Strut Mount for 1-5/8" pipe with 1" insulation	10	49
	HR 728212 Steel Strut Mount for 2-1/8" pipe with 1" insulation		10	49
	HR 728262	R 728262 Steel Strut Mount for 2-5/8" pipe with 1" insulation		49
	HR 728312	Steel Strut Mount for 3-1/8" pipe with 1" insulation	10	49
	HR 728412	Steel Strut Mount for 4-1/8" pipe with 1" insulation	10	49
	HR 824062	Plastic Strut Mount for 5/8" pipe with 1/2" insualtion	20	50
	HR 824087	Plastic Strut Mount for 7/8" pipe with 1/2" insualtion	20	50
	HR 824112	Plastic Strut Mount for 1-1/8" pipe with 1/2" insualtion	20	50
	HR 824137	Plastic Strut Mount for 1-3/8" pipe with 1/2" insualtion	20	50
	HR 824162	Plastic Strut Mount for 1-5/8" pipe with 1/2" insualtion	10	50
	HR 824212	Plastic Strut Mount for 2-1/8" pipe with 1/2" insualtion	10	50
	HR 828087	Plastic Strut Mount for 7/8" pipe with 1" insulation	10	50
	HR 828112	Plastic Strut Mount for 1-1/8" pipe with 1" insulation	10	50
	HR 828137	Plastic Strut Mount for 1-3/8" pipe with 1" insulation	10	50
	HR 828162	Plastic Strut Mount for 1-5/8" pipe with 1" insulation	10	50
	HR 828212	Plastic Strut Mount for 2-1/8" pipe with 1" insulation	10	50
	HR 828262	Plastic Strut Mount for 2-5/8" pipe with 1" insulation	10	50
	QB-50-F	Seat belt sytle water heater straps, supports up to 80 gallons	20	54
	QFC-7515	3/4" FIP x 3/4" FIP x 15" Stainless Steel Water Heater Connector	35	52
	QFC-7518	3/4" FIP x 3/4" FIP x 18" Stainless Steel Water Heater Connector	35	52
	QFC-7524	3/4" FIP x 3/4" FIP x 24" Stainless Steel Water Heater Connector	35	52
	QFC-17518	1" FIP x 3/4" FIP x 18" Stainless Steel Water Heater Connector	30	52
	QFC-17524	1" FIP x 3/4" FIP x 24" Stainless Steel Water Heater Connector	30	52
	QFC-0118	1" FIP x 1" FIP x18" Stainless Steel Water Heater Connector	25	52
	QFC-0124	1" FIP x 1" FIP x 24" Stainless Steel Water Heater Connector	25	52
	QFC-11418	1-1/4" FIP x 1-1/4" FIP x 18" Stainless Steel Water Heater Connector	12	52
	QFC-11218	1-1/2" FIP x 1-1/2" FIP x 18" Stainless Steel Water Heater Connector	10	52
	QFC-0218	2" FIP x 2" FIP x 18" Stainless Steel Water Heater Connector	9	52
	QP-20	20" Aluminum Water Heater Pan with drain fitting	6	52
	QP-22	22" Aluminum Water Heater Pan with drain fitting	6	52
	QP-24	24" Aluminum Water Heater Pan with drain fitting	6	52
	QP-26	26" Aluminum Water Heater Pan with drain fitting	6	52
	QP-28	28" Aluminum Water Heater Pan with drain fitting	6	52
	QP-30	30" Aluminum Water Heater Pan with drain fitting	6	52
	QS-120	Galvanized water heater straps, supports up to 120 gallons	12	54
	QS-50	Galvanized water heater straps, supports up to 80 gallons	15	54
	QS-50-D	Powder coated water heater straps w/ 2 safety caps, supports up to 80 gal	15	54
	QS-E24	24" Shed Enclosure (24" x 74" x 24")	1	52
	QS-E26	26" Shed Enclosure (26" x 74" x 26")	1	52

Job Name

Co. Name

Address

www.holdrite.com

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

P.O. # Date Estimate#

Contact		Phone		
Quantity	Model #	Product Description	Box Qty	Page No.
	QS-E30	30" Shed Enclosure (30" x 74" x 30")	1	52
	QS-50-P	Galvanized water heater straps, supports up to 80 gallons, pre-bagged	15	54
	QS-50-S	Galvanized water heater straps, supports up to 80 gallons with 1" wall spacer	15	54
	QS-05	Thermal expansion tank mounting bracket, supports up to 2.5 gallons and 9.5" diameter	15	54
	QS-12	Thermal expansion tank mounting bracket, supports 2.5-5 gallons and 9.5"-13" diameter	15	54
	SB1	Stout Bracket; 10" to 18" Span - no screws	50	32
	SB1S	Stout Bracket; 10" to 18" Span - four screws		9, 13, 19, 25, 32, 39, 69, 70, 71, 73, 74, 75
	SB1-2502	One Stout Bracket 10" to 18" - Two Stout Clamps - four screws	25	32, 39
	SB2	Stout Bracket; 13" to 25" Span - no screws	50	32
	SB2S	Stout Bracket; 13" to 25" Span - four screws	50	9, 13, 19, 25, 32, 39, 71, 74, 75
	SB2-2502	One Stout Bracket 13" to 25" - Two Stout Clamps - four screws	25	32, 39
	SB3	Wide Stout Bracket; 10-1/4" to 17-1/2" Span - Screws not included	50	9, 14, 19, 25, 32, 69, 70, 71, 74, 75
	SB4	Wide Stout Bracket; 15-1/4" to 25-1/2" Span - Screws not included	50	9, 14, 19, 25, 32, 74
	V-2	Copper-Bonded steel bracket designed to hold 1/2" to 3" pipes horizontally	25	23, 72



Quantity	Model #	Product Type	Pipe O.D.	Size	Page No.
	PS-NP-0050	HydroFlame Cast-in-Place Sleeves	.840"	1/2"	59
	PS-NP-0075	HydroFlame Cast-in-Place Sleeves	1.050"	3/4"	59
	PS-NP-0100	HydroFlame Cast-in-Place Sleeves	1.315"	1"	59
	PS-NP-0125	HydroFlame Cast-in-Place Sleeves	1.660"	1-1/4"	59
	PS-NP-0150	HydroFlame Cast-in-Place Sleeves	1.900"	1-1/2"	59
	PS-NP-0200	HydroFlame Cast-in-Place Sleeves	2.375"	2"	59
	PS-NP-0250	HydroFlame Cast-in-Place Sleeves	2.875"	2-1/2"	59
	PS-NP-0300	HydroFlame Cast-in-Place Sleeves	3.50"	3"	59
	PS-NP-0400	HydroFlame Cast-in-Place Sleeves	4.5"	4"	59
	PS-NP-0600	HydroFlame Cast-in-Place Sleeves	6.625"	6"	59
	PS-CP-0050	HydroFlame Cast-in-Place Sleeves	.625"	1/2"	59
	PS-CP-0075	HydroFlame Cast-in-Place Sleeves	0.875"	3/4"	59
	PS-CP-0100	HydroFlame Cast-in-Place Sleeves	1.125"	1"	59
	PS-CP-0125	HydroFlame Cast-in-Place Sleeves	1.375"	1-1/4"	59
	PS-CP-0150	HydroFlame Cast-in-Place Sleeves	1.625"	1-1/2"	59
	PS-CP-0200	HydroFlame Cast-in-Place Sleeves	2.125"	2"	59
	PS-CN-0050	HydroFlame Cast-in-Place Sleeves	.840"	1/2"	59
	PS-CN-0075	HydroFlame Cast-in-Place Sleeves	1.050"	3/4"	59
	PS-CN-0100	HydroFlame Cast-in-Place Sleeves	1.315"	1"	59
	PS-CN-0125	HydroFlame Cast-in-Place Sleeves	1.660"	1-1/4"	59
	PS-CN-0150	HydroFlame Cast-in-Place Sleeves	1.900"	1-1/2"	59
	PS-CN-0200	HydroFlame Cast-in-Place Sleeves	2.375"	2"	59

(800) 321-0316

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

www.holdrite.com

P.O. #

Job Name Co. Name Address Contact

Date Estimate#

PS-CI PS-CI PS-CI PS-CT PS-CI PS-CI PS-CI PS-CI PS-CI	CN-0300 CN-0400 CN-0600 CT-0050 CT-0075 CT-0100 CT-0125 CT-0150 CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	2.875" 3.50" 4.5" 6.625" 6.875" 1.125" 1.375" 1.625" 2.125" 2.625" 4.125"	2-1/2" 3" 4" 6" 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4"	59 59 59 59 59 59 59 59 59
PS-CI PS-CI PS-CT PS-CI	CN-0400 CN-0600 CT-0050 CT-0075 CT-0100 CT-0125 CT-0150 CT-0200 CT-0250 CT-0260 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	4.5" 6.625" 0.875" 1.125" 1.375" 1.625" 2.125" 2.625" 3.125" 4.125"	4" 6" 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3"	59 59 59 59 59 59 59 59
PS-CI PS-CT	CN-0600 CT-0050 CT-0075 CT-0100 CT-0125 CT-0150 CT-0250 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	6.625" .625" 0.875" 1.125" 1.375" 1.625" 2.125" 2.625" 3.125" 4.125"	6" 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3"	59 59 59 59 59 59 59
PS-CT	CT-0050 CT-0075 CT-0100 CT-0125 CT-0150 CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	.625" 0.875" 1.125" 1.375" 1.625" 2.125" 2.625" 3.125" 4.125"	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3"	59 59 59 59 59 59
PS-CT	CT-0075 CT-0100 CT-0125 CT-0150 CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	0.875" 1.125" 1.375" 1.625" 2.125" 2.625" 3.125" 4.125"	3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3"	59 59 59 59 59 59
PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0100 CT-0125 CT-0150 CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	1.125" 1.375" 1.625" 2.125" 2.625" 3.125" 4.125"	1" 1-1/4" 1-1/2" 2" 2-1/2" 3"	59 59 59 59 59
PS-CT PS-CT PS-CT PS-CT PS-CT PS-CT PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0125 CT-0150 CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	1.375" 1.625" 2.125" 2.625" 3.125" 4.125"	1-1/4" 1-1/2" 2" 2-1/2" 3"	59 59 59 59
PS-CT PS-CT PS-CT PS-CT PS-CT PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0150 CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	1.625" 2.125" 2.625" 3.125" 4.125"	1-1/2" 2" 2-1/2" 3"	59 59 59
PS-CT PS-CT PS-CT PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0200 CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves	2.125" 2.625" 3.125" 4.125"	2" 2-1/2" 3"	59 59
PS-CT PS-CT PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0250 CT-0300 CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves HydroFlame Cast-in-Place Sleeves HydroFlame Cast-in-Place Sleeves HydroFlame Cast-in-Place Sleeves	2.625" 3.125" 4.125"	2-1/2" 3"	59
PS-CT PS-CT PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CI PS-CI	CT-0300 CT-0400 CT-0600 CH-0200	HydroFlame Cast-in-Place Sleeves HydroFlame Cast-in-Place Sleeves HydroFlame Cast-in-Place Sleeves	3.125" 4.125"	3"	
PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0400 CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves HydroFlame Cast-in-Place Sleeves	4.125"		
PS-CT PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH PS-CH	CT-0600 CH-0200 CH-0300	HydroFlame Cast-in-Place Sleeves		4.11	59
PS-CI PS-CI PS-CI PS-CI PS-CI	CH-0200 CH-0300	·	0.40="	4"	59
PS-CH PS-CH PS-CI PS-CI PS-CI	CH-0300	HydroFlame Cast-in-Place Sleeves	6.125"	6"	59
PS-CI PS-CI PS-CI		Trydror larie Gust in Flage Gleeves	2.38"	2"	59
PS-CI PS-CI PS-CI	CH-0400	HydroFlame Cast-in-Place Sleeves	3.50"	3"	60
PS-CI PS-CI	JI 1-0 4 00	HydroFlame Cast-in-Place Sleeves	4.50"	4"	60
PS-CI	CI-0150	HydroFlame Cast-in-Place Sleeves	1.90"	1-1/2"	60
L	CI-0200	HydroFlame Cast-in-Place Sleeves	2.30"	2"	60
PS-CI	CI-0300	HydroFlame Cast-in-Place Sleeves	3.30"	3"	60
l l o o.	CI-0400	HydroFlame Cast-in-Place Sleeves	4.30"	4"	60
PS-CI	CI-0600	HydroFlame Cast-in-Place Sleeves	6.30"	6"	60
PS-CX	CX-0150	HydroFlame Cast-in-Place Sleeves	1.90"	1-1/2"	60
PS-CX	CX-0200	HydroFlame Cast-in-Place Sleeves	2.35"	2"	60
PS-CX	CX-0300	HydroFlame Cast-in-Place Sleeves	3.35"	3"	60
PS-CX	CX-0400	HydroFlame Cast-in-Place Sleeves	4.38"	4"	60
PS-CX	CX-0500	HydroFlame Cast-in-Place Sleeves	5.30"	5"	60
PS-CX	CX-0600	HydroFlame Cast-in-Place Sleeves	6.30"	6"	60
PS-S1	ST-0050	HydroFlame Cast-in-Place Sleeves	.840"	1/2"	60
PS-S1	ST-0075	HydroFlame Cast-in-Place Sleeves	1.050"	3/4"	60
PS-S1	ST-0100	HydroFlame Cast-in-Place Sleeves	1.315"	1"	60
PS-S1	ST-0125	HydroFlame Cast-in-Place Sleeves	1.660"	1-1/4"	60
PS-S1	ST-0150	HydroFlame Cast-in-Place Sleeves	1.900"	1-1/2"	60
PS-S1	ST-0200	HydroFlame Cast-in-Place Sleeves	2.375"	2"	60
PS-S1	ST-0250	HydroFlame Cast-in-Place Sleeves	2.875"	2-1/2"	60
PS-S1	ST-0300	HydroFlame Cast-in-Place Sleeves	3.50"	3"	60
PS-S1	ST-0400	HydroFlame Cast-in-Place Sleeves	4.5"	4"	60
PS-S1	ST-0600	HydroFlame Cast-in-Place Sleeves	6.625"	6"	60
PS-E1	ET-0050	HydroFlame Cast-in-Place Sleeves	0.706"	1/2"	60
PS-E1	ET-0075	HydroFlame Cast-in-Place Sleeves	0.922"	3/4"	60
PS-E1	ET-0100	HydroFlame Cast-in-Place Sleeves	1.163"	1"	60
PS-E1	T-0125	HydroFlame Cast-in-Place Sleeves	1.51"	1-1/4"	60
PS-E1		HydroFlame Cast-in-Place Sleeves	1.74'	1-1/2"	

Job Name

Co. Name

Address

Contact

HOLDRITE

www.holdrite.com

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

Date	
Estimate#	ī

P.O. #

Phone

Quantity	Model #	Product Type	Pipe O.D.	Size	Page I
	PS-ET-0200	HydroFlame Cast-in-Place Sleeves	2.197"	2"	60
	PS-ET-0250	HydroFlame Cast-in-Place Sleeves	2.875"	2-1/2"	60
	PS-ET-0300	HydroFlame Cast-in-Place Sleeves	3.5"	3"	60
	PS-ET-0400	HydroFlame Cast-in-Place Sleeves	4.5"	4"	60
	CD-NP-0050	Corrugated Cast-in-Place Sleeves	.840"	1/2"	61
	CD-NP-0075	Corrugated Cast-in-Place Sleeves	1.050"	3/4"	61
	CD-NP-0100	Corrugated Cast-in-Place Sleeves	1.315"	1"	61
	CD-NP-0125	Corrugated Cast-in-Place Sleeves	1.660"	1-1/4"	61
	CD-NP-0150	Corrugated Cast-in-Place Sleeves	1.900"	1-1/2"	61
	CD-NP-0200	Corrugated Cast-in-Place Sleeves	2.375"	2"	61
	CD-NP-0250	Corrugated Cast-in-Place Sleeves	2.875"	2-1/2"	61
	CD-NP-0300	Corrugated Cast-in-Place Sleeves	3.50"	3"	61
	CD-NP-0400	Corrugated Cast-in-Place Sleeves	4.5"	4"	61
	CD-NP-0600	Corrugated Cast-in-Place Sleeves	6.625"	6"	61
	CD-CP-0050	Corrugated Cast-in-Place Sleeves	.625"	1/2"	61
	CD-CP-0075	Corrugated Cast-in-Place Sleeves	0.875"	3/4"	61
	CD-CP-0100	Corrugated Cast-in-Place Sleeves	1.125"	1"	61
	CD-CP-0125	Corrugated Cast-in-Place Sleeves	1.375"	1-1/4"	61
	CD-CP-0150	Corrugated Cast-in-Place Sleeves	1.625"	1-1/2"	61
	CD-CP-0200	Corrugated Cast-in-Place Sleeves	2.125"	2"	61
	CD-CN-0050	Corrugated Cast-in-Place Sleeves	.840"	1/2"	61
	CD-CN-0075	Corrugated Cast-in-Place Sleeves	1.050"	3/4"	61
	CD-CN-0100	Corrugated Cast-in-Place Sleeves	1.315"	1"	61
	CD-CN-0125	Corrugated Cast-in-Place Sleeves	1.660"	1-1/4"	61
	CD-CN-0150	Corrugated Cast-in-Place Sleeves	1.900"	1-1/2"	61
	CD-CN-0200	Corrugated Cast-in-Place Sleeves	2.375"	2"	61
	CD-CN-0250	Corrugated Cast-in-Place Sleeves	2.875"	2-1/2"	61
	CD-CN-0300	Corrugated Cast-in-Place Sleeves	3.50"	3"	61
	CD-CN-0400	Corrugated Cast-in-Place Sleeves	4.5"	4"	61
	CD-CN-0600	Corrugated Cast-in-Place Sleeves	6.625"	6"	61
	CD-CT-0050	Corrugated Cast-in-Place Sleeves	.625"	1/2"	61
	CD-CT-0075	Corrugated Cast-in-Place Sleeves	0.875"	3/4"	61
	CD-CT-0100	Corrugated Cast-in-Place Sleeves	1.125"	1"	61
	CD-CT-0125	Corrugated Cast-in-Place Sleeves	1.375"	1-1/4"	61
	CD-CT-0150	Corrugated Cast-in-Place Sleeves	1.625"	1-1/2"	61
	CD-CT-0200	Corrugated Cast-in-Place Sleeves	2.125"	2"	61
	CD-CT-0250	Corrugated Cast-in-Place Sleeves	2.625"	2-1/2"	61
	CD-CT-0230	Corrugated Cast-in-Place Sleeves	3.125"	3"	+
	CD-CT-0300 CD-CT-0400	<u> </u>	4.125"	3 4"	61
		Corrugated Cast in Place Sleeves			61
	CD-CT-0600	Corrugated Cost in Place Sleeves	6.125"	6"	61
	CD-CH-0200	Corrugated Cast-in-Place Sleeves	2.38"	2"	61
	CD-CH-0300	Corrugated Cast-in-Place Sleeves	3.50"	3"	62
	CD-CH-0400	Corrugated Cast-in-Place Sleeves	4.50"	4"	62
	CD-CI-0150	Corrugated Cast-in-Place Sleeves	1.90"	1-1/2"	62

(800) 321-0316

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

www.holdrite.com

P.O. #

Job Name Co. Name Address

Contact

Date Estimate#

Ougatitus	Model #	Due de let True e	Dina O D	Cina	Daga Na
Quantity	CD-CI-0200	Product Type Corrugated Cast-in-Place Sleeves	Pipe O.D. 2.30"	Size 2"	Page No.
	CD-CI-0200 CD-CI-0300		3.30"	3"	62
	CD-CI-0300	Corrugated Cast in Place Sleeves	4.30"	4"	+ -
	CD-CI-0400 CD-CI-0600	Corrugated Cast in Place Sleeves	6.30"	6"	62 62
	CD-CI-0000 CD-CX-0150	Corrugated Cast-in-Place Sleeves Corrugated Cast-in-Place Sleeves	1.90"	1-1/2"	62
	CD-CX-0190		2.35"	2"	62
	CD-CX-0200	Corrugated Cast-in-Place Sleeves Corrugated Cast-in-Place Sleeves	3.35"	3"	62
	CD-CX-0400		4.38"	4"	+
	+	Corrugated Cast in Place Sleeves		5"	62
	CD-CX-0500	Corrugated Cast-in-Place Sleeves	5.30"	6"	62
	CD-CX-0600	Corrugated Cast-in-Place Sleeves	6.30"	+	62
	CD-ST-0050	Corrugated Cast-in-Place Sleeves	.840"	1/2"	62
	CD-ST-0075	Corrugated Cast-in-Place Sleeves	1.050"	3/4"	62
	CD-ST-0100	Corrugated Cast-in-Place Sleeves	1.315"	1"	62
	CD-ST-0125	Corrugated Cast-in-Place Sleeves	1.660"	1-1/4"	62
	CD-ST-0150	Corrugated Cast-in-Place Sleeves	1.900"	1-1/2"	62
	CD-ST-0200	Corrugated Cast-in-Place Sleeves	2.375"	2"	62
	CD-ST-0250	Corrugated Cast-in-Place Sleeves	2.875"	2-1/2"	62
	CD-ST-0300	Corrugated Cast-in-Place Sleeves	3.50"	3"	62
	CD-ST-0400	Corrugated Cast-in-Place Sleeves	4.5"	4"	62
	CD-ST-0600	Corrugated Cast-in-Place Sleeves	6.625"	6"	62
	CD-ET-0050	Corrugated Cast-in-Place Sleeves	0.706"	1/2"	62
	CD-ET-0075	Corrugated Cast-in-Place Sleeves	0.922"	3/4"	62
	CD-ET-0100	Corrugated Cast-in-Place Sleeves	1.163"	1"	62
	CD-ET-0125	Corrugated Cast-in-Place Sleeves	1.51"	1-1/4"	62
	CD-ET-0150	Corrugated Cast-in-Place Sleeves	1.74'	1-1/2"	62
	CD-ET-0200	Corrugated Cast-in-Place Sleeves	2.197"	2"	62
	CD-ET-0250	Corrugated Cast-in-Place Sleeves	2.875"	2-1/2"	62
	CD-ET-0300	Corrugated Cast-in-Place Sleeves	3.5"	3"	62
	CD-ET-0400	Corrugated Cast-in-Place Sleeves	4.5"	4"	62
	HP-NP-0050	Slab and Wall Seal w/ Pipe Inserts	.840"	1/2"	66
	HP-NP-0075	Slab and Wall Seal w/ Pipe Inserts	1.050"	3/4"	66
	HP-NP-0100	Slab and Wall Seal w/ Pipe Inserts	1.315"	1"	66
	HP-NP-0125	Slab and Wall Seal w/ Pipe Inserts	1.660"	1-1/4"	66
	HP-NP-0150	Slab and Wall Seal w/ Pipe Inserts	1.900"	1-1/2"	66
	HP-NP-0200	Slab and Wall Seal w/ Pipe Inserts	2.375"	2"	66
	HP-NP-0250	Slab and Wall Seal w/ Pipe Inserts	2.875"	2-1/2"	66
	HP-NP-0300	Slab and Wall Seal w/ Pipe Inserts	3.50"	3"	66
	HP-NP-0400	Slab and Wall Seal w/ Pipe Inserts	4.5"	4"	66
	HP-NP-0600	Slab and Wall Seal w/ Pipe Inserts	6.625"	6"	66
	HP-CP-0050	Slab and Wall Seal w/ Pipe Inserts	.625"	1/2"	66
	HP-CP-0075	Slab and Wall Seal w/ Pipe Inserts	0.875"	3/4"	66
	HP-CP-0100	Slab and Wall Seal w/ Pipe Inserts	1.125"	1"	66
	HP-CP-0125	Slab and Wall Seal w/ Pipe Inserts	1.375"	1-1/4"	66
	HP-CP-0150	Slab and Wall Seal w/ Pipe Inserts	1.625"	1-1/2"	66

Job Name

Co. Name

Address

Contact

www.holdrite.com

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

Date

P.O. #

Estimate#

Phone

Quantity	Model #	Product Type	Pipe O.D.	Size	Page No.
	HP-CP-0200	Slab and Wall Seal w/ Pipe Inserts	2.125"	2"	66
	HP-CN-0050	Slab and Wall Seal w/ Pipe Inserts	.840"	1/2"	66
	HP-CN-0075	Slab and Wall Seal w/ Pipe Inserts	1.050"	3/4"	66
	HP-CN-0100	Slab and Wall Seal w/ Pipe Inserts	1.315"	1"	66
	HP-CN-0125	Slab and Wall Seal w/ Pipe Inserts	1.660"	1-1/4"	66
	HP-CN-0150	Slab and Wall Seal w/ Pipe Inserts	1.900"	1-1/2"	66
	HP-CN-0200	Slab and Wall Seal w/ Pipe Inserts	2.375"	2"	66
	HP-CN-0250	Slab and Wall Seal w/ Pipe Inserts	2.875"	2-1/2"	66
	HP-CN-0300	Slab and Wall Seal w/ Pipe Inserts	3.50"	3"	66
	HP-CN-0400	Slab and Wall Seal w/ Pipe Inserts	4.5"	4"	66
	HP-CN-0600	Slab and Wall Seal w/ Pipe Inserts	6.625"	6"	66
	HP-CT-0050	Slab and Wall Seal w/ Pipe Inserts	.625"	1/2"	66
	HP-CT-0075	Slab and Wall Seal w/ Pipe Inserts	0.875"	3/4"	66
	HP-CT-0100	Slab and Wall Seal w/ Pipe Inserts	1.125"	1"	66
	HP-CT-0125	Slab and Wall Seal w/ Pipe Inserts	1.375"	1-1/4"	66
	HP-CT-0150	Slab and Wall Seal w/ Pipe Inserts	1.625"	1-1/2"	66
	HP-CT-0200	Slab and Wall Seal w/ Pipe Inserts	2.125"	2"	66
	HP-CT-0250	Slab and Wall Seal w/ Pipe Inserts	2.625"	2-1/2"	66
	HP-CT-0300	Slab and Wall Seal w/ Pipe Inserts	3.125"	3"	66
	HP-CT-0400	Slab and Wall Seal w/ Pipe Inserts	4.125"	4"	66
	HP-CT-0600	Slab and Wall Seal w/ Pipe Inserts	6.125"	6"	66
	HP-CH-0200	Slab and Wall Seal w/ Pipe Inserts	2.38"	2"	66
	HP-CH-0300	Slab and Wall Seal w/ Pipe Inserts	3.50"	3"	67
	HP-CH-0400	Slab and Wall Seal w/ Pipe Inserts	4.50"	4"	67
	HP-CI-0150	Slab and Wall Seal w/ Pipe Inserts	1.90"	1-1/2"	67
	HP-CI-0200	Slab and Wall Seal w/ Pipe Inserts	2.30"	2"	67
	HP-CI-0300	Slab and Wall Seal w/ Pipe Inserts	3.30"	3"	67
	HP-CI-0400	Slab and Wall Seal w/ Pipe Inserts	4.30"	4"	67
	HP-CI-0600	Slab and Wall Seal w/ Pipe Inserts	6.30"	6"	67
	HP-CX-0150	Slab and Wall Seal w/ Pipe Inserts	1.90"	1-1/2"	67
	HP-CX-0200	Slab and Wall Seal w/ Pipe Inserts	2.35"	2"	67
	HP-CX-0300	Slab and Wall Seal w/ Pipe Inserts	3.35"	3"	67
	HP-CX-0400	Slab and Wall Seal w/ Pipe Inserts	4.38"	4"	67
	HP-CX-0500	Slab and Wall Seal w/ Pipe Inserts	5.30"	5"	67
	HP-CX-0600	Slab and Wall Seal w/ Pipe Inserts	6.30"	6"	67
	HP-ST-0050	Slab and Wall Seal w/ Pipe Inserts	.840"	1/2"	67
	HP-ST-0075	Slab and Wall Seal w/ Pipe Inserts	1.050"	3/4"	67
	HP-ST-0100	Slab and Wall Seal w/ Pipe Inserts	1.315"	1"	67
	HP-ST-0125	Slab and Wall Seal w/ Pipe Inserts	1.660"	1-1/4"	67
	HP-ST-0150	Slab and Wall Seal w/ Pipe Inserts	1.900"	1-1/2"	67
	HP-ST-0200	Slab and Wall Seal w/ Pipe Inserts	2.375"	2"	67
	HP-ST-0250	Slab and Wall Seal w/ Pipe Inserts	2.875"	2-1/2"	67
	HP-ST-0300	Slab and Wall Seal w/ Pipe Inserts	3.50"	3"	67
	HP-ST-0400	Slab and Wall Seal w/ Pipe Inserts	4.5"	4"	67

(800) 321-0316

HOLDRITE Material "Take-off" Sheet and 2012 Catalog Page # Locator

www.holdrite.com

P.O. #

Job Name

Co. Name

Address

Contact

Date

Estimate#

Phone

		Phone			
Quantity	Model #	Product Type	Pipe O.D.	Size	Page No.
	HP-ST-0600	Slab and Wall Seal w/ Pipe Inserts	6.625"	6"	67
	HP-ET-0050	Slab and Wall Seal w/ Pipe Inserts	0.706"	1/2"	67
	HP-ET-0075	Slab and Wall Seal w/ Pipe Inserts	0.922"	3/4"	67
	HP-ET-0100	Slab and Wall Seal w/ Pipe Inserts	1.163"	1"	67
	HP-ET-0125	Slab and Wall Seal w/ Pipe Inserts	1.51"	1-1/4"	67
	HP-ET-0150	Slab and Wall Seal w/ Pipe Inserts	1.74'	1-1/2"	67
	HP-ET-0200	Slab and Wall Seal w/ Pipe Inserts	2.197"	2"	67
	HP-ET-0250	Slab and Wall Seal w/ Pipe Inserts	2.875"	2-1/2"	67
	HP-ET-0300	Slab and Wall Seal w/ Pipe Inserts	3.5"	3"	67
	HP-ET-0400	Slab and Wall Seal w/ Pipe Inserts	4.5"	4"	67
	PS-NPMS-0200	Nominal Pipe Body Seal	2.375"	2"	67
	PS-NPMS-0300	Nominal Pipe Body Seal	3.50"	3"	67
	PS-NPMS-0400	Nominal Pipe Body Seal	4.50"	4"	67
	PS-NPMS-0600	Nominal Pipe Body Seal	6.625"	6"	67
	TB-NP-0200	Cast-in-Place Tub Box	N/A	1-1/2"	63
	TB-TW-0200	Cast-in-Place Tub Box	N/A	1-1/2"	63
	OPS-PL-0100	Cast-In-Place Optional Pipe Size Sleeve	N/A	1"	64
	OPS-PL-0200	Cast-In-Place Optional Pipe Size Sleeve	N/A	2"	64
	OPS-PL-0300	Cast-In-Place Optional Pipe Size Sleeve	N/A	3	64
	OPS-PL-0400	Cast-In-Place Optional Pipe Size Sleeve	N/A	4	64
	OPS-PL-0600	Cast-In-Place Optional Pipe Size Sleeve	N/A	6	64
	OPS-MT-0100	Cast-In-Place Optional Pipe Size Sleeve	N/A	1	64
	OPS-MT-0200	Cast-In-Place Optional Pipe Size Sleeve	N/A	2	64
	OPS-MT-0300	Cast-In-Place Optional Pipe Size Sleeve	N/A	3	64
	OPS-MT-0400	Cast-In-Place Optional Pipe Size Sleeve	N/A	4	64
	OPS-MT-0600	Cast-In-Place Optional Pipe Size Sleeve	N/A	6	64
	PS-NPCF-0300	Cast-in-Place Closet Flange Sleeves	3.5"	3"	63
	PS-NPCF-0400	Cast-in-Place Closet Flange Sleeves	4.5"	4"	63
	PS-CICF-0300	Cast-in-Place Closet Flange Sleeves	3.30"	3"	63
	PS-CICF-0400	Cast-in-Place Closet Flange Sleeves	4.30"	4"	63
	PS-CXCF-0300	Cast-in-Place Closet Flange Sleeves	3.35"	3"	63
	PS-CXCF-0400	Cast-in-Place Closet Flange Sleeves	4.38"	4"	63
	PS-SD-0200	Cast-in-Place Shower Drain Sleeves	2.375"	2"	63
	HM-DK-0200	Cast-In-Place Drain Stand Kit	N/A	2"	64
	HM-DK-0300	Cast-In-Place Drain Stand Kit	N/A	3"	64
	HM-DK-0400	Cast-In-Place Drain Stand Kit	N/A	4"	64
	AA-0304	Recesed Fitting Box for Wood Form Deck	N/A	3" or 4"	67
	AA-06	Recesed Fitting Box for Wood Form Deck	N/A	6"	67
Quantity	Model #	Product Type	Sleeve I.D.	Nominal Sleeve Riser Size	Page No.
	PS-LS-0300	Cast-in-Place Line Set Sleeves	3.75"	3"	64
	PS-CS-0200	Cast-in-Place Cable Sleeves	2.626"	2"	64
	PS-CS-0300	Cast-in-Place Cable Sleeves	3.75"	3"	64
	CD-0125	Corrugated Deck Concrete Sleeve	1.53"	1-1/4"	65

www.holdrite.com

HOLDRITE

www.holdrite.com

		the second secon	Champion of the Control of the Contr	
HOLDRITE Mater	ial "Take-off	" Sheet and 2012.	Catalog Page # Locator	

Job Name	
Co. Name	
Address	

 Date	P.O. #
Estimate#	
	_

Phone

Quantity	Model #	Product Type	Sleeve I.D.	Nominal Sleeve Riser Size	Page No.
	CD-0200	Corrugated Deck Concrete Sleeve	2.19"	2"	65
	CD-0300	Corrugated Deck Concrete Sleeve	3.33"	3"	65
	CD-0400	Corrugated Deck Concrete Sleeve	4.28"	4"	65
	CD-0500	Corrugated Deck Concrete Sleeve	5.22"	5"	65
	CD-0600	Corrugated Deck Concrete Sleeve	6.22"	6"	65
	CD-0800	Corrugated Deck Concrete Sleeve	8.21"	8"	65
	WD-0125	Wood Deck Concrete Sleeve	1.53"	1-1/4"	65
	WD-0200	Wood Deck Concrete Sleeve	2.19"	2"	65
	WD-0300	Wood Deck Concrete Sleeve	3.33"	3"	65
	WD-0400	Wood Deck Concrete Sleeve	4.28"	4"	65
	WD-0500	Wood Deck Concrete Sleeve	5.22"	5"	65
	WD-0600	Wood Deck Concrete Sleeve	6.22"	6"	65
	WD-0800	Wood Deck Concrete Sleeve	8.21"	8"	65

NOTES			



Visit www.holdrite.com for access to the following no-charge services



Estimating Services

We provide a consulting service that will provide you with a comprehensive cost-savings analysis based on the cost of materials and installation resulting from the use of HOLDRITE® products on your projects.



CAD Files

Incorporate HOLDRITE® product drawings directly into your plans. Various formats are available, such as DWG and BIM ready.



Product Specifications

Download HOLDRITE® Product Specification Sheets and Specification Language with all the critical information you need.



Application Drawings

Download application installation drawings by HOLDRITE® model number or allow our VIP Team to provide a customized detail page for your project.

